Materials:
* Insulator: Glass filled Polyester UL 94V-0, Color Black
* Contact: Phosphor Bronze

Ordering Code

CS05 ** 1 1 A 0*
① ② ③ ④ ⑤ ⑥

①Series No.
②No. of Circuits
③Plating code:
1= 2.54μm(100μ") Min. Tin over 1.27μm(50μ") Nickel
④Color: 1= Black
⑤Option:
Please check details in Table
⑥Other option: 00= Standard
0A= With Bracket

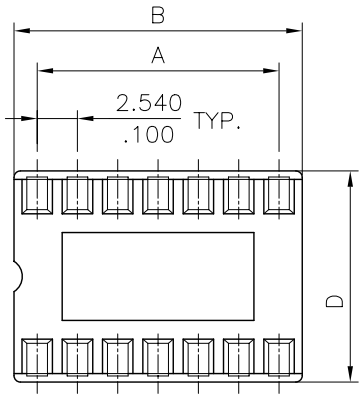

Typical 24,28,32,40 Circuits

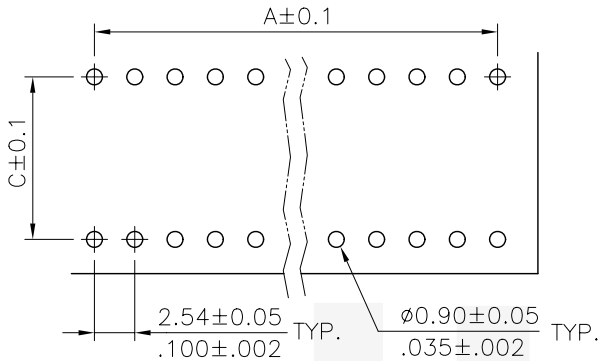

Recommended PC Board Layout

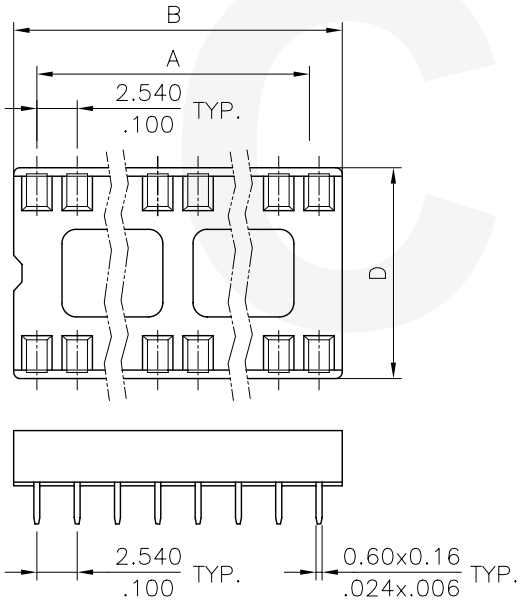

Typical 24,28,32,40,42,48 Circuits



Circuits	CviLux P/N	Dimension			
		A	B	C	D
24	CS052411A00	27.94(1.100)	30.48(1.200)	15.24(.600)	17.5(.689)
	CS052411A0A				
28	CS052811A00	33.02(1.300)	35.56(1.400)	15.24(.600)	17.5(.689)
	CS052811A0A				
32	CS053211A00	38.10(1.500)	40.64(1.600)	15.24(.600)	17.5(.689)
	CS053211A0A				
40	CS054011A00	48.26(1.900)	50.80(2.000)	15.24(.600)	17.5(.689)
	CS054011A0A				
42	CS054211A0A	50.80(2.000)	53.34(2.200)	15.24(.600)	17.5(.689)
48	CS054811A0A	58.42(2.300)	60.96(2.400)	15.24(.600)	17.5(.689)

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1			

CVILUX CORP 2009.07.07 ISSUED

		DATE
DRAWN BY:	Karen	6/25-09'
ENGINEER:	Eisley	6/30-09'
CHECKED BY:	David	6/30-09'
APPROVED BY:	Alex	6/30-09'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 2.54MM(.100") DUAL IN LINE IC SOCKET

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CS0504SA	PART NO.	CS05**11A0*
SCALE	2 / 1	SHEET 1 OF 1	