

Material:
* Insulation: Glass filled polyester UL 94V-0
△3 * Contact: Brass

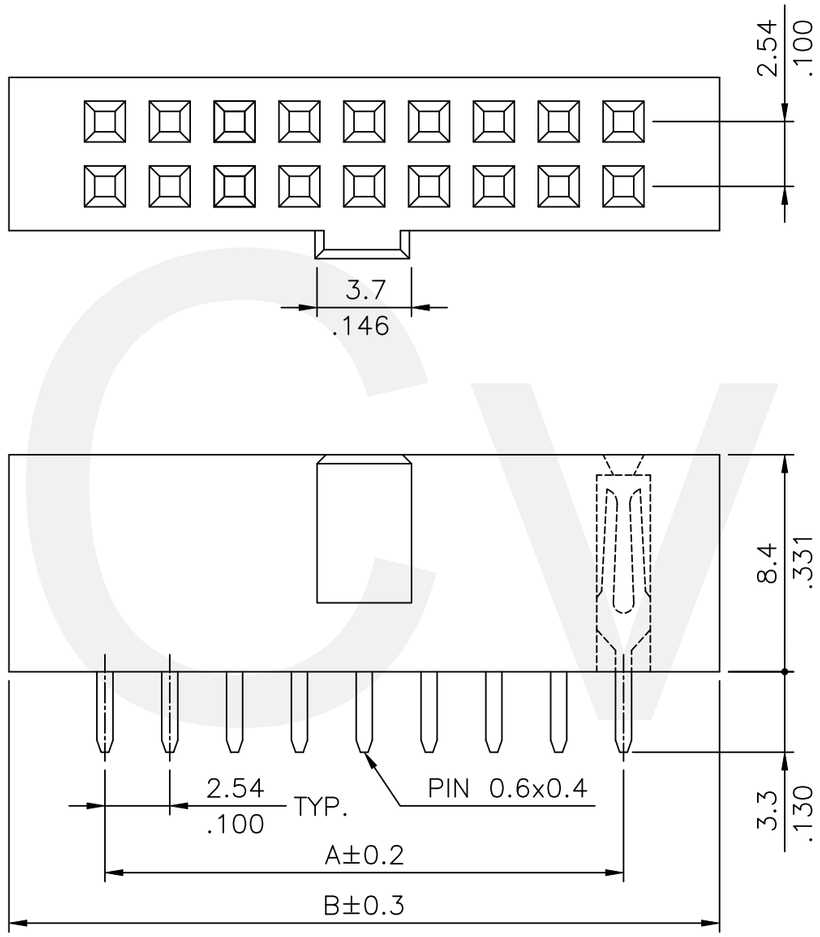

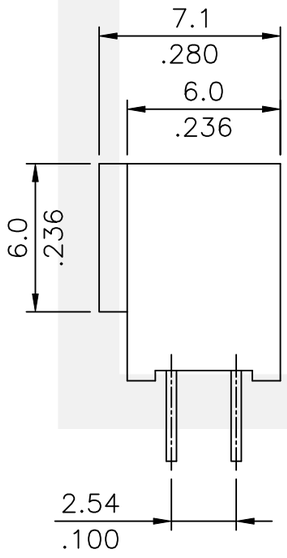


A = 2.54 * No. of Spaces
B = A + 7.34
* Available circuits: 6,8,10,12,14,16,20,24,26,
30,34,40 and 50

Ordering Code:

CB94	**	2	V	1	00
①	②	③	④	⑤	⑥

① Series No.
② NO. of Circuits:
③ Plating code:
2= Gold flash plated over Nickel
④ Tail Style: V= Straight
⑤ Color: 1= Black
⑥ Other options: 00= Standard

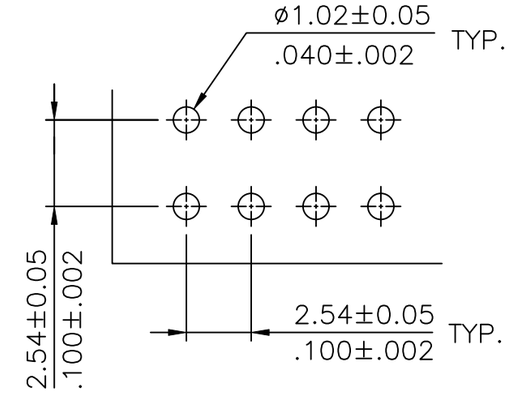

Recommended P.C. Board Layout

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△4			
△3	Jessie	11/8-23'	ECRT123057/ECNT123206
△2	Sun	8/02-10'	ECR10108-0/ECN10270
△1	Sun	7/07-05'	ECR05063-0/ECN05236

CviLux Corp 2023/11/13 ISSUED

		DATE
DRAWN BY:	Jessie	11/8-23'
ENGINEER:	Sun	11/8-23'
CHECKED BY:	Eisley	11/8-23'
APPROVED BY:	Eisley	11/8-23'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.30 / .012	X.° ± 1°
.XX ± 0.20 / .008	.X° ±
.XXX ± 0.10 / .004	.XX° ±

TITLE: 2.54MM(.100") DUAL ROW BOARD MOUNT CONNECTOR
MATERIAL:
FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CB9401SE	PART NO.	CB94**2V100
SCALE	3 / 1	SHEET 1 OF 1	