
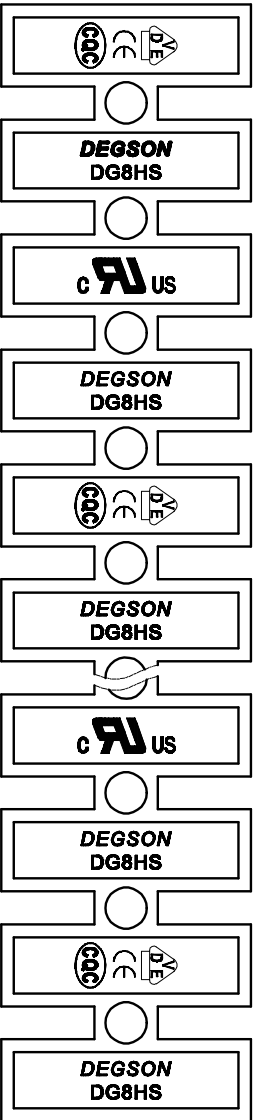


Pitch Range	Nominal Dimension Range					
	In mm		In mm		In mm	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	±2
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30

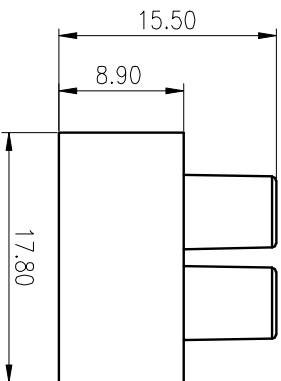

3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	300/70
IEC 标准/IEC Standard:	B	C	D
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	450/32	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	/	2.5	/
拧紧扭矩/ Torque Tightening(N·m/Lb.in)	M2.5: 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.5~4.0/20~12		
间距/Pitch(mm)/线数范围/Poles	8.2		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: /  
 CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
**DG8HS-1.2-XXP-1Y-100A(H)**

DRAWING NO.: DG8HS-C06  
 DFT: ZHQ 2015.12.01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET: 1/1

REV	ECN	DESCRIPTION	DFT	DATE