
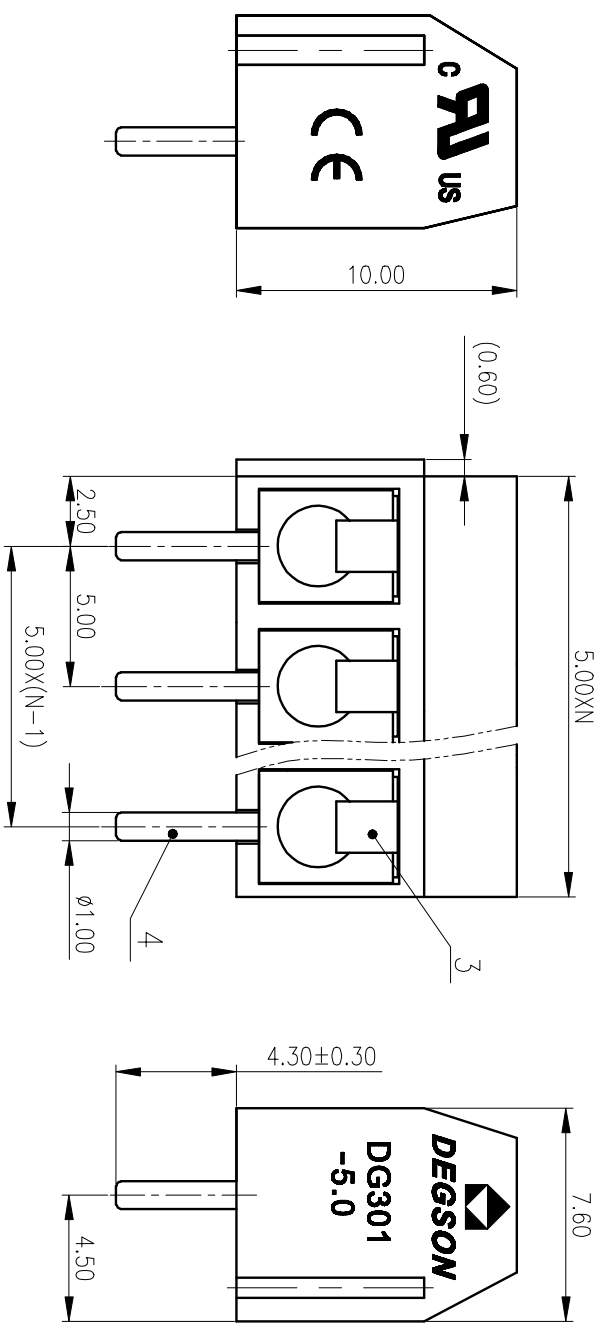
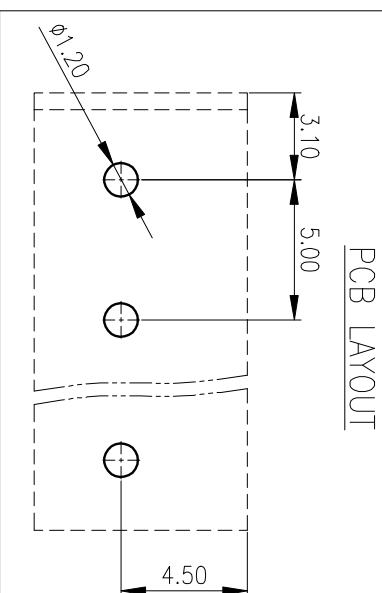


公差等级/General	公差值/Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

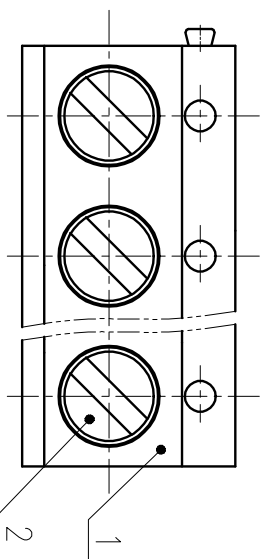

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper alloy	M2.5/Sn Plated
3	Spring	Stainless steel	
2	Screw	Steel	M2.5/Zn Plated
1	Housing	PBT	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2	
绝缘/Insulation Degree	/	IP50/IP5	/	
额定电压/电涌/Rated Voltage(V)/Current(A)	/	AC2000	/	
工频耐压/Withstanding voltage(V/1min)	M2.5, 0.29/2.60			
拧紧扭矩/ Torque Tightening(N·m/Lbin)	0.75~1.5/22~14			
线径范围/导线和线径/Wire Range(rigid and flexible)(mm ² /AWG)	5.0/N=02~22P			
间距/Pitch(mm)/导线范围/Poles	6~7			
剥线长度/Stripping length(mm)	-30~+120			
使用温度范围/Operating temperature(°C)	Yes			
符合RoHS要求/Conform to RoHS				

MATERIAL:	SURFACE:
MAT NO.:	/
STATUS:	/
APPD: Lon	CHH 2020.05.25
CHKD: Yu	JZh 2020.05.25
DRAFT: Li	Zh 2020.05.25
NAME:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	10002154
TYPE:	CUSTOMER DRAWING

SIZE: A4	SCALE: 4:1
REV	TO
1/1	

REV	ECN	DESCRIPTION	DRAFT	DATE