


公差等级/General	Tolerances(mm)														0.1/1.0		
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.280	>.315	>.400	>.500	>.630	>.800	>.1000	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
+0.12	+0.18	+0.22	+0.26	+0.31	+0.37	+0.57	+0.80	+1.05	+1.15	+1.60	+2.20	+2.50	±Z	±Z	±Z	±Z	±Z

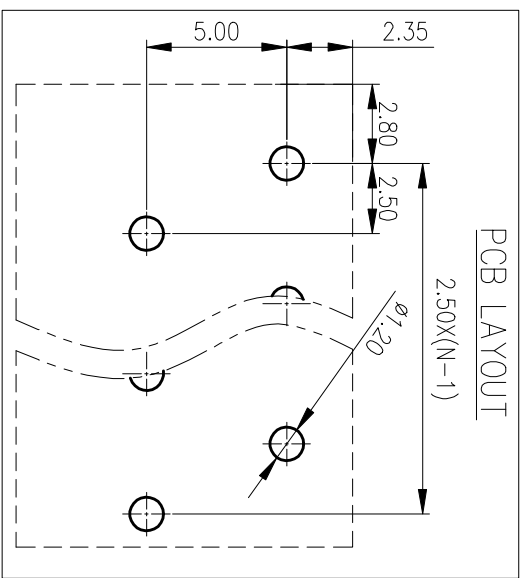

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Button	PA66	UL94V-0
4	Small Pin header	Copper Alloy	Sn plated
5	Big Pin header	Copper Alloy	Sn plated

REV	ECN	DESCRIPTION	DRFT	DATE
1				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
Appd:	LIGL 2020.06.19	NAME:	
CHKD:	MeK 2020.06.19	NINGBO DEGSON ELECTRICAL CO., LTD	
DRFT:	YYC 2017.09.02	DRAWING NO.:	
		DG250-2.5-C01	
		TYPE: CUSTOMER DRAWING	
		SCALE: 4:1	
		SHEET	
		1/1	

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/2	300/2	300/2
IEC 标准/IEC Standard:			
IEC 额定电压/电涌/Rated Voltage(V)/Current(A)			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	/	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)		250/2	/
工频耐压/Withstanding voltage(V/1Min)		AC2000	
线径范围(裸线护套)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~0.5/24~20	
间距/Pitch(mm)/线数范围/Poles		2.5/N=01~24P	
剥线长度/Stripping length(mm)		8.5~9.5	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:			
PANTONE / RAL			