


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

PCB LAYOUT

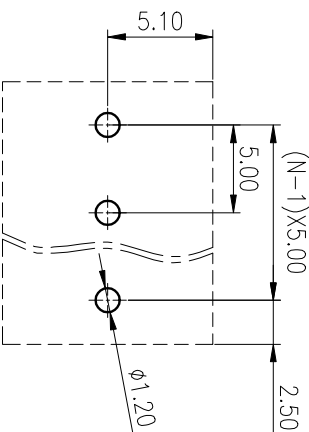

ITEM	NAME OF PART	MATERIAL	NOTES
5	Clamp	Stainless steel	/
4	Pin header	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PBT	UL94V-0
1	Housing	PBT	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: LiGL 2020.05.27	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Mek 2020.05.27	DG390-5.0-XXP-1Y-00A(H)
DRAFT: MSh 2020.05.27	DRAWING NO.: DG390-5.0-C04
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 2.5:1	SCALE: 2.5:1 SHEET
	REV T0
	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级	/	III/2	/
绝缘/Insulation Degree	/	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/13.5	/
工频耐压/Withstanding voltage(V/1Min)	/	AC2000	/
线径范围(裸线/绞线)/Wire Range(rigid and flexible)(mm² /AWG)	/	1.0/22~18	/
间距/Pitch(mm)/线径范围/Poles	/	5.0/N=02~24P	/
剥线长度/Stripping length(mm)	/	8-9	/
使用温度范围/Operating Temperature(°C)	/	-40~+105	/
符合RoHS要求/Conform to RoHS	/	Yes	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/