


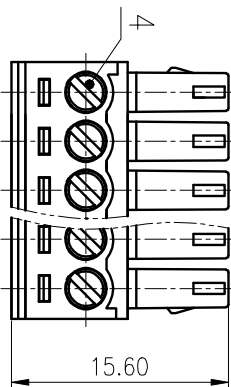



公差等级/General Tolerances(mm)		尺寸/Dimensions											
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z



Only 02-06 Poles have this stick point

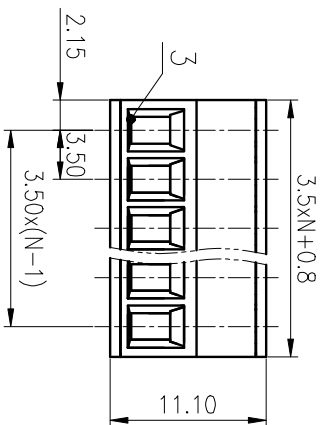

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	15EDGK-3.5-XXP-1Y-00A(H)	
APPD:	LanChH 2020.05.30	DRAWING NO.: 10002218	
CHKD:	YUZH 2020.05.30	TYPE: CUSTOMER DRAWING	
DFT:	BoYH 2020.05.30	SCALE:	2:1
REV	ECN	DESCRIPTION	DFT
1	2	3	4
1/1			SHEET

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Cage	Copper Alloy	M2/Ni Plated
4	Screw	Steel	M2/Zn Plated
5	Clamp	Copper Alloy	Sn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:	II/2		
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	250/7		
额定冲击电压(kV)/Rate Impulse Voltage(kV)	2.5		
紧固扭矩/转矩/Tightening(N·m/Lbin)	M2, 0.2/1.77		
绕线范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.5~1.5/28~16		
间距/Pitch(mm)/绕线范围/Poles	3.50/N=02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		