


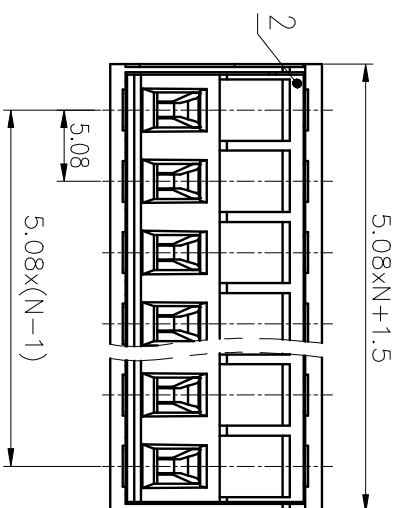


精度等级/General Tolerances(mm)		0		~3		>3		>6		>10		>18		>30		>50		>80		>120		>180		>250		>315		>400		>500	
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50	±2.50

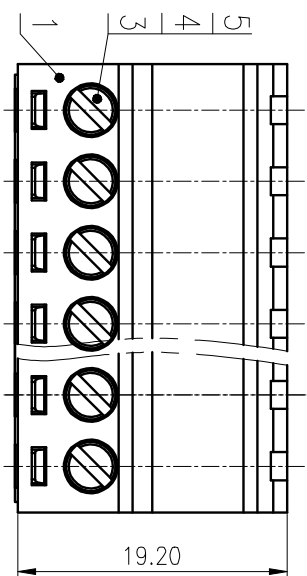

ITEM	NAME OF PART	MATERIAL	NOTES
5	Screws	Steel	M2.5/Zn Plated
4	cage	Copper alloy	Ni Plated
3	Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10

IEC 标准 /IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree	/	320/20	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	320/20	/
额定冲击电压(kV)/Rate Impulse Voltage(kV)	M2.5, 0.4/3.54	4	
额定扭矩/螺栓和螺线/Wire Tightening(N·m/Lb·in)	0.2~2.5/28~12		
挠性范围/导线和螺线/Wire Range(rigid and flexible)(mm ² /AWG)	5.08/N=02~24P		
同轴/Pitch(mm)/线数/Number of Poles	7-8		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating temperature(°C)	Yes		
符合RoHS标准/Conform to RoHS			

MATERIAL:	/
SURFACE:	/
MAT NO.:	/
STATUS:	/
APPD:	LonQH 2020.05.18
CHKD:	GongZh 2020.05.18
DRT:	LY 2020.05.18

NAME:	2EDGKR-5.08-XXP-1Y-00A(H)
DRAWING NO.:	10002068

TYPE:	CUSTOMER DRAWING	SCALE:	2:1
REV	TO	REV	1/1

REV	ECN	DESCRIPTION	DRT	DATE

D

C

B

A

D

C

B

A

1

2

3

4

5

6