未注公差/General tolerances(mm)														
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

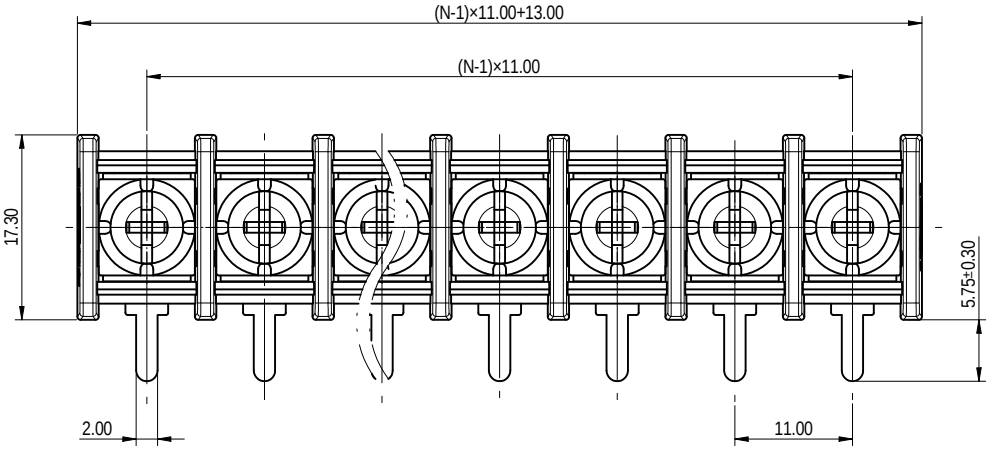

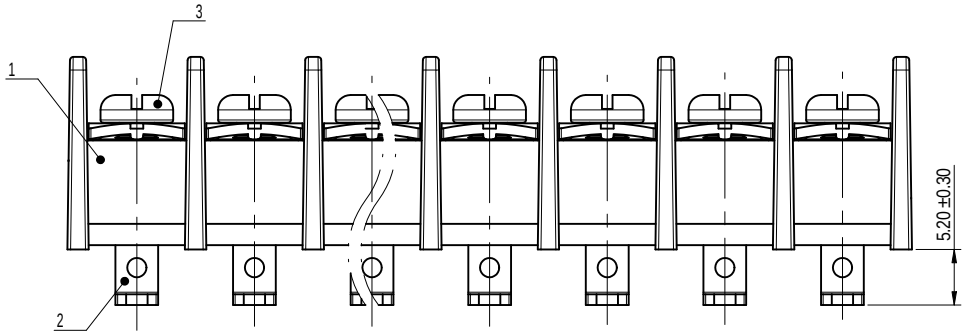



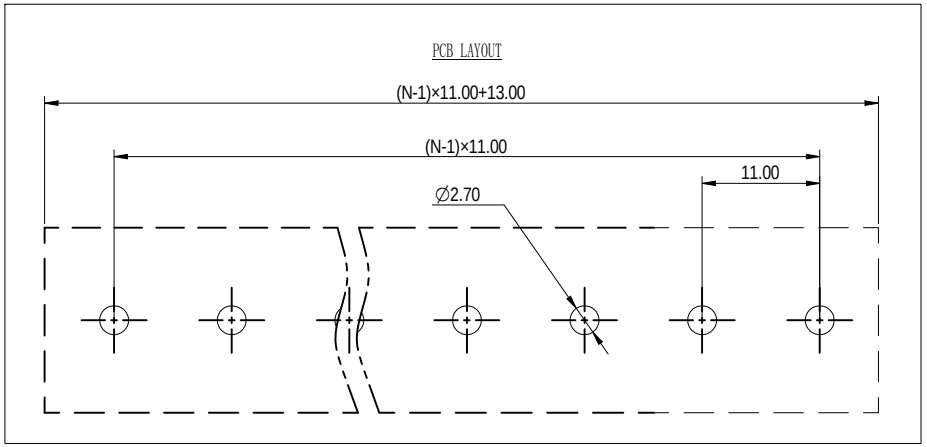

Note:The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

	B	C	D
UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	300/30	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	22~10		
间距/Pitch(mm)/线数范围/Poles	11.00/N=02~22P		
剥线长度/Stripping length(mm)	11~13		
使用温度范围/Operating temperature(℃)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

REV	ECN	DESCRIPTION	DRFT	DATE
00				

DEGSON

APPD:	皇贵凡	2023.05.24
CHKD:	曹利彬	2023.05.24
DRFT:	委民洁	2023.05.24

A3 | mm (inch)

MATERIAL: | SURFACE/COLOR:

MAT NO./REV: - / 00 | MAT STATUS: 批量

NAME: DG65R-B-XXP-1Y-00A&Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200196371	CUSTOMER DRAWING	已发布	1:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除非经过明确授权，否则禁止本文件的传递、复制、利用、交流其文件的内容。侵权者将负担赔偿责任。本公司保留对发明专利、实用新型或外观设计的所有权利。