



公差表 / (General Tolerances)(mm)														
0	~3	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
3	~6	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														±2





01P

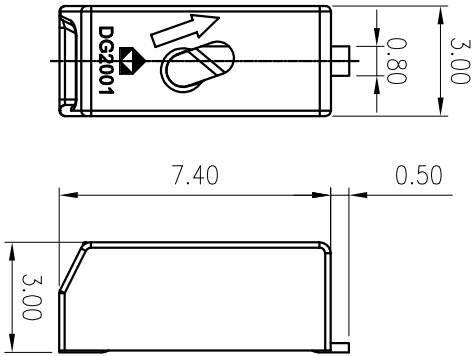

02P

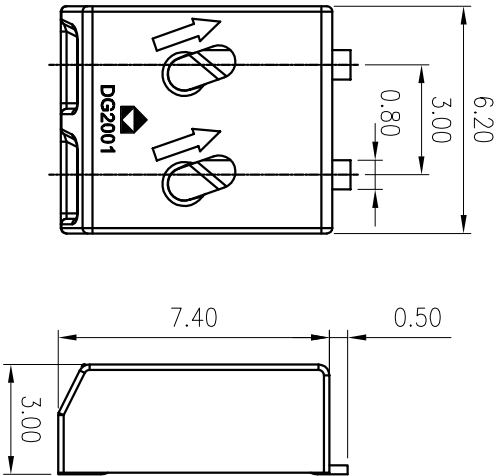


03P

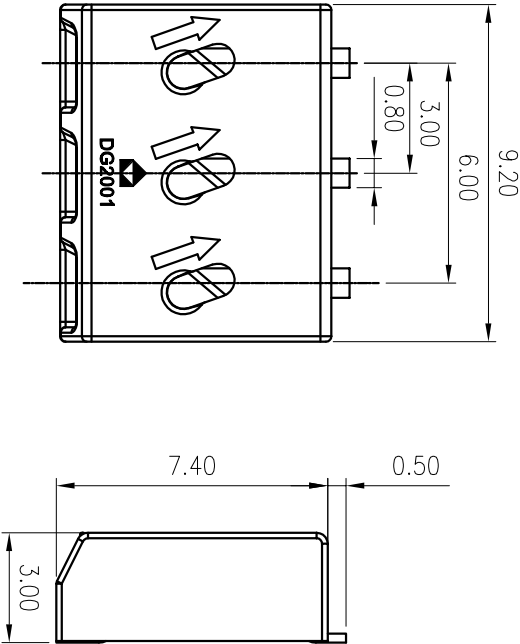

3	Spring	Stainless steel	/
2	Pin header	Copper alloy	Sn plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:			
额定电压/电流 /Rated Voltage(V)/Current(A)		600V/3A(01P) 300V/3A(02P/03P)	

PCB LAYOUT

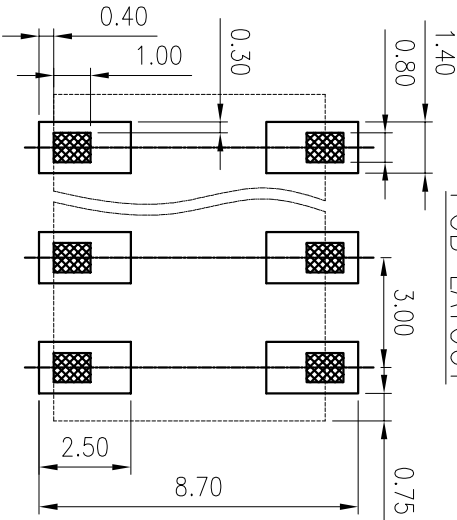

MATERIAL: / SURFACE: /

MAT NO.: /
STATUS: /
NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

APPD: ZhuWM 2021.03.22
CHKD: CoolB 2021.03.22
NAME: **DG2001-3.0-XXP-1Y-01A(H)**

DRFT: MJN 2017.05.10
DRAWING NO.: DG2001-3.0-C01
TYPE: CUSTOMER DRAWING
SCALE: 2:1
REV TO
SHEET 1/1