


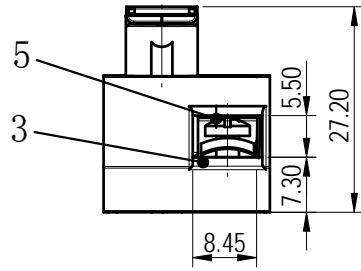




未注公差/General tolerances (mm)											0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



Note:  
The A&Z (H) in the name means: A (H) and Z (H).

ITEM	NAME OF PART	MATERIAL	NOTES
5	Screw	Steel	M3.5/Zn Plated
4	Clamp	Copper	Sn Plated
3	Pin header	Copper	Sn Plated
2	Housing	PA66	UL94 V-0
1	Fuse box	PA66	UL94 V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	250/6.3	/	/
IEC 标准/IEC Standard:	250/6.3		
额定电压/电流/Rated Voltage(V)/Current(A)	250/6.3		
耐压/Withstanding Voltage:	AC2000V/1Min		
绝缘电阻/Insulation Resistance	500MΩ/DC500V		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3.5, 0.8/7.08		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~14 / 0.5~2.5		
间距/Pitch(mm)/线数范围/Poles	N=01P		
使用温度范围/Operating temperature(°C)	-40~+105		

**DEGSON**

APPD: 蓝贵凡 2022.11.17  
 CHKD: 曹利彬 2022.11.16  
 DRFT: 虞倩松 2022.11.16

MATERIAL:	SURFACE/COLOR:		
MAT NO./REV: - / 00.02	MAT STATUS: 批量		
NAME T5F2.5-01P-15-01A&Z(H)			
DRAWING NO. 200120376	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 1:1
SHEET 1/1			

REV	ECN	DESCRIPTION	DRFT	DATE
00		由PDMTO版升级至TC00版	虞倩松	2022.11.16

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利等明确授权外, 复制、引用、发布本文档内容, 未经许可, 均视为侵权。本公司保留所有权利。