


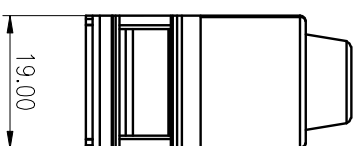
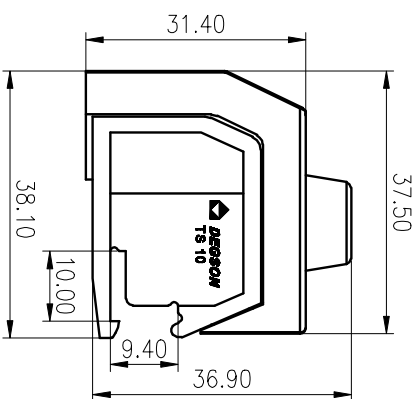
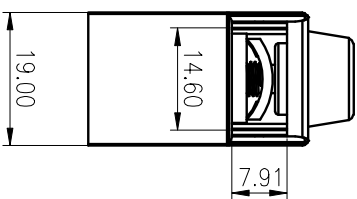


公差等级/General Tolerances(mm)		0.1/1/10	
0	>3	>10	>315
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±Z	±Z	±Z	±Z

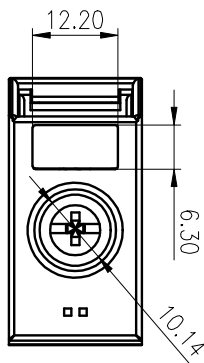

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M5/Zn Plated
3	Current carrier	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)	Current(A)	300	55	300/55
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/标称等		III/2		
污染/ Pollution Degree		750/57		
额定电压/电压/Rated Voltage(V)	Current(A)	AC8000V/1Min		
工频耐压/Withstanding voltage		M5, 2.0/17.71		
螺栓扭矩/Torque Tightening(N·m/Lb·in)		4.0~10/12~6		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AMG)		15-17		
剥线长度/Stripping length(mm)		-40~+105		
使用温度范围/Operating Temperature(°C)		Yes		
符合RoHS环保要求/Conform to RoHS		RAL 2000		
标准颜色编号/Standard color number: RAL		RAL 2000		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

NAME: **NINGBO DEGSON ELECTRICAL CO., LTD**

DRAWING NO.: TS10-C02

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

SIZE: A4 (mm/inch)

1 2 3 4 5 6

D B A