Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经书面授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。

未注公差/General tolerances(mm)														
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

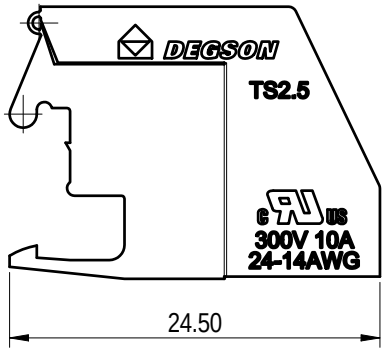

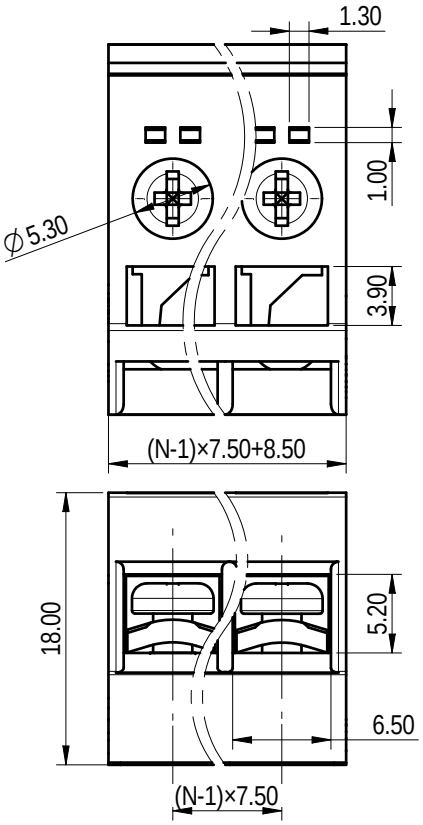

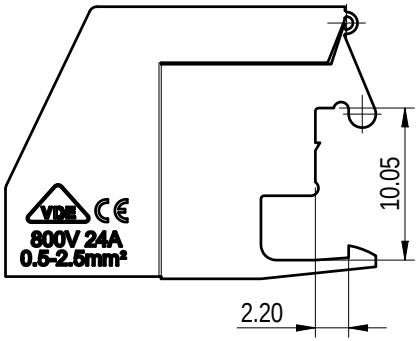

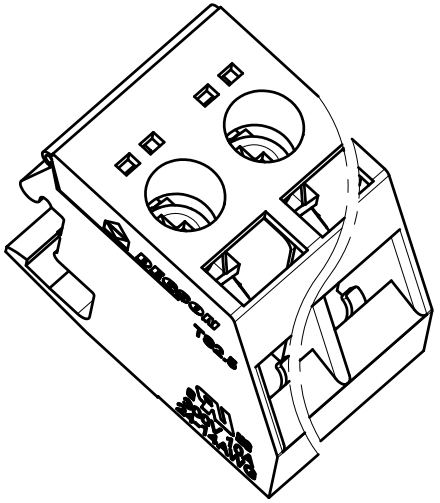

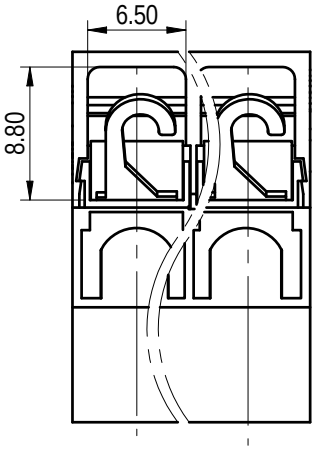

Note: The A&Z(H) in the name means:A(H)andZ(H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Zn Plated
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94 V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	300/10	/
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	800/24		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.4		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24～14 / 0.5～2.5		
间距/Pitch(mm)/线数范围/Poles	7.5/N=02～03P		
剥线长度/Stripping length(mm)	8～10		
使用温度范围/Operating temperature(°C)	-40～+105		
符合RoHS环保要求/Conform to RoHS	Yes		

REV	ECN	DESCRIPTION	DRFT	DATE
00		由PDMT4版升级至TC00版	虞倩松	2022.12.19

DEGSON

APPD:	蓝贵凡	2022.12.20
CHKD:	曹利彬	2022.12.19
DRFT:	虞倩松	2022.12.19

A4 mm (inch)

MATERIAL: | SURFACE/COLOR: pantone 157U

MAT NO./REV: - / 00 | MAT STATUS: 批量

NAME: TS2.5-XXP-15-01A&Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200120266	CUSTOMER DRAWING	已发布	2:1	1/1