


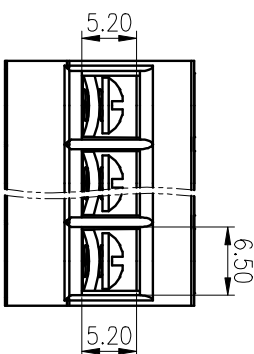
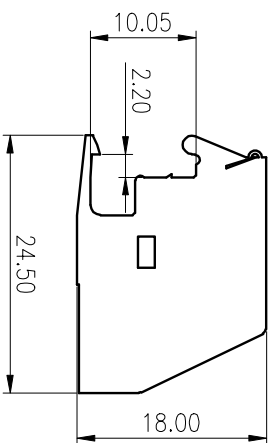



精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

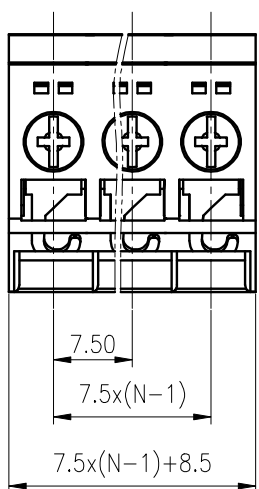

3	Screw	Steel	M3/Zn Plated
2	Pin header	Copper	M3/Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	300/10	/
IEC 标准/IEC Standard:	/		
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	800/24		
工频耐压/Withstanding voltage	M3, 0.5, 4.4		
螺栓扭矩/Torque Tightening(N·m/Lb·in)	0.5~2.5/24~14		
线径范围(裸线/绞线)/Wire Range(rigid and flexible)(mm²/AWG)	7.5/N=02~03P		
间距/Pitch(mm)/线径范围/Poles	8~10		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating Temperature(°C)	Yes		
符合RoHS环保要求/Conform to RoHS	RAL 2000		
标准颜色编号/Standard color number: RAL	RAL 2000		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
TS2.5-XXP-15-01A(H)

DRAWING NO.: TS2.5-C02
 TYPE: CUSTOMER DRAWING
 SCALE: 1.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1.5:1 SHEET	REV	TO
1									T0

