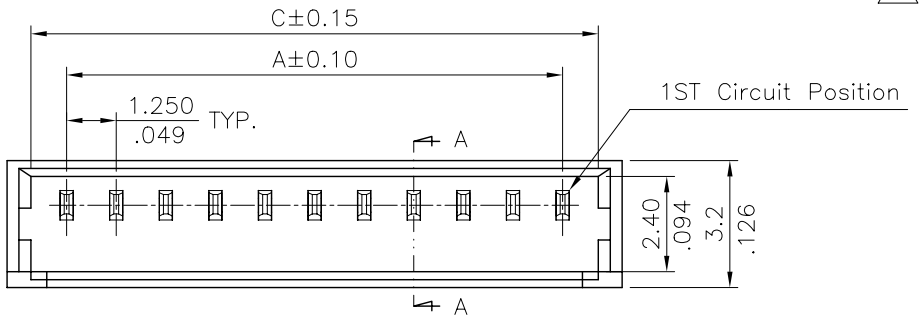

△1 Note:

* Material :

Insulation:

Nylon 46+40% G.F UL 94V-0

Color Nature(Ivory)

Contact : Phosphor Bronze

* Recommended mating part:

Housing : CI44**S0000

Terminal : CI44T011PP0

ORDERING CODE:

CI44 ** P 1 V 00

① ② ③ ④ ⑤ ⑥

① SERIES NO.:

② NO. OF CIRCUITS: 02 TO 15

③ CONTACTS TYPE: P= Plug

④ PLATING OPTION:

1= Tin over Nickel plated

⑤ TAIL STYLE: V= STRAIGHT

⑥ OPTION: 00= STANDARD

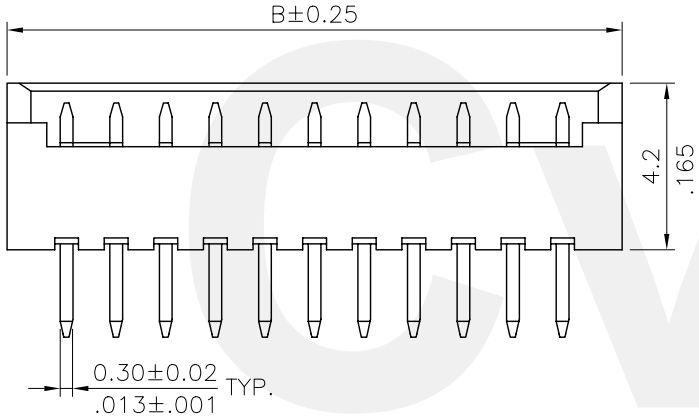

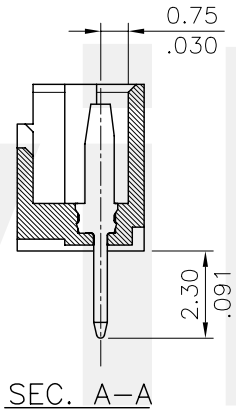

SEC. A-A

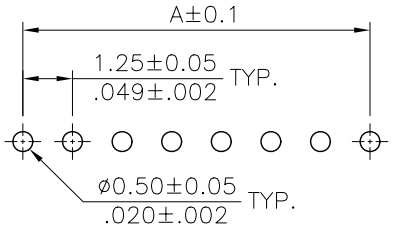

Recommended P.C. Board Layout

Circuits	Dimension		
	A	B	C
2	1.25(.049)	4.35(.171)	3.15(.124)
3	2.50(.098)	5.6(.220)	4.40(.173)
4	3.75(.148)	6.85(.270)	5.65(.222)
5	5.00(.197)	8.1(.319)	6.90(.272)
6	6.25(.246)	9.35(.368)	8.15(.321)
7	7.50(.295)	10.6(.417)	9.40(.370)
8	8.75(.344)	11.85(.467)	10.65(.419)
9	10.00(.394)	13.1(.516)	11.90(.469)
10	11.25(.443)	14.35(.565)	13.15(.518)
11	12.50(.492)	15.6(.614)	14.40(.567)
12	13.75(.541)	16.85(.663)	15.65(.616)
13	15.00(.591)	18.1(.713)	16.90(.665)
14	16.25(.640)	19.35(.762)	18.15(.715)
15	17.50(.689)	20.6(.811)	19.40(.764)

Tin-Lead Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△4			
△3			
△2			
△1	Eager	02/13-07'	ECR07015-0/ECN07050

CVILUX CORP
2007.03.06
ISSUED

		DATE
DRAWN BY:	Eager	02/27-07'
ENGINEER:	Eisley	03/01-07'
CHECKED BY:	David	03/01-07'
APPROVED BY:	Alex	03/01-07'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.25/.010	X.° ± 1°
.XX ± 0.15/.006	.X° ±
.XXX ± 0.08/.003	.XX° ±

TITLE: 1.25MM(.049") STRAIGHT HEADER

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI4403SG	PART NO.	CI44**P1V00
SCALE	5 / 1	SHEET	1 OF 1