

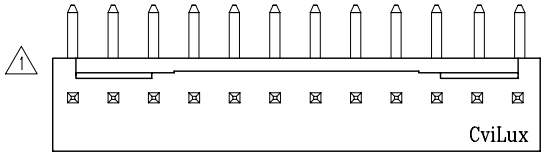

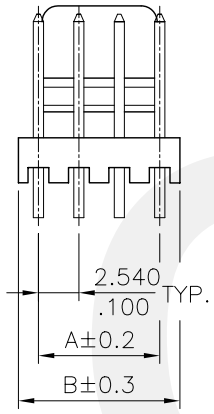

(2 through 5 circuits)

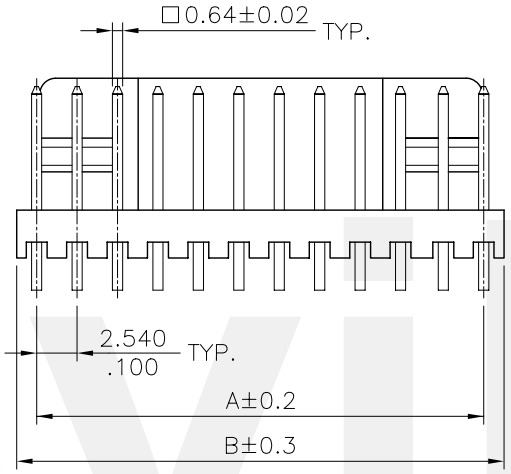

(6 through 20 circuits)

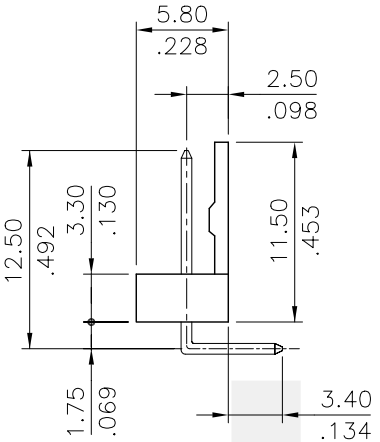

A = 2.54 x No. of Spaces
B = A + 2.54

* Available in 2 through 20 circuits



Recommended P.C. Board Layout

Material:
* Insulation: Nylon 66 UL 94V-2
Color Nature
* Contact: Brass

Ordering Code:

CI31	**	P	1	H	00
①	②	③	④	⑤	⑥

① Series No.
② No. of Circuits
③ Contact type: P= Pin header
④ Plating option:
1= 3.05μm(120μ") Min. Tin plated over 0.76μm(30μ") Nickel
⑤ Tail Style: H= Right Angle
⑥ Option: 00= Standard

Halogen-Free
Tin-Lead Process
RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	Sandy	8/14/06'	ECN06275/ECR06020-2

CVILUX CORP
2006.08.18
ISSUED

		DATE
DRAWN BY:	Sandy	8/16/06'
ENGINEER:	Eisley	8/17/06'
CHECKED BY:	David	8/17/06'
APPROVED BY:	Alex	8/17/06'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 2.54MM(.100") RIGHR ANGLE HEADERS

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI3103SE	PART NO.	CI31**P1H00
SCALE	2 / 1	SHEET 1 OF 1	