



Notes:

- * Insulation: Nylon 66, Color Nature(Halogen-Free)
- * Contact: Copper alloy
- * Circuit Pattern Schedule: See Drawing No: CP0110S*
- * For Tin-Lead Wave Flow Process
- * With drain holes shown For 4~24 circuits
- * Without drain holes shown For 2 circuits

Ordering Code:

CP-01 3 ** * * C
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Type of Connector:
3= Straight PCB mount header
- ③ No of Circuits:
- ④ Plating Code:
1= 3.05 μm(120 μ") Tin over 0.76 μm(30 μ") Nickel
M= 3.05 μm(120 μ") Matte Tin over 0.76 μm(30 μ") Nickel
- ⑤ Variation:
1= UL 94V-2, Without mounting pegs
3= UL 94V-0, Without mounting pegs
- ⑥ Option:
C= High current type

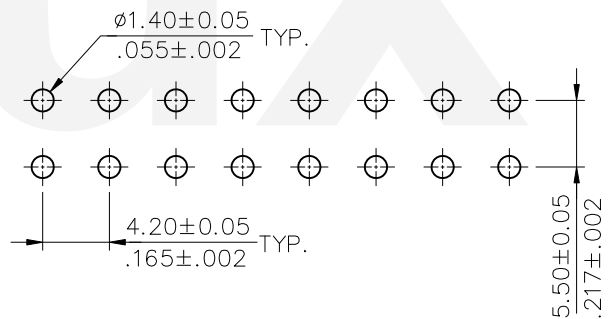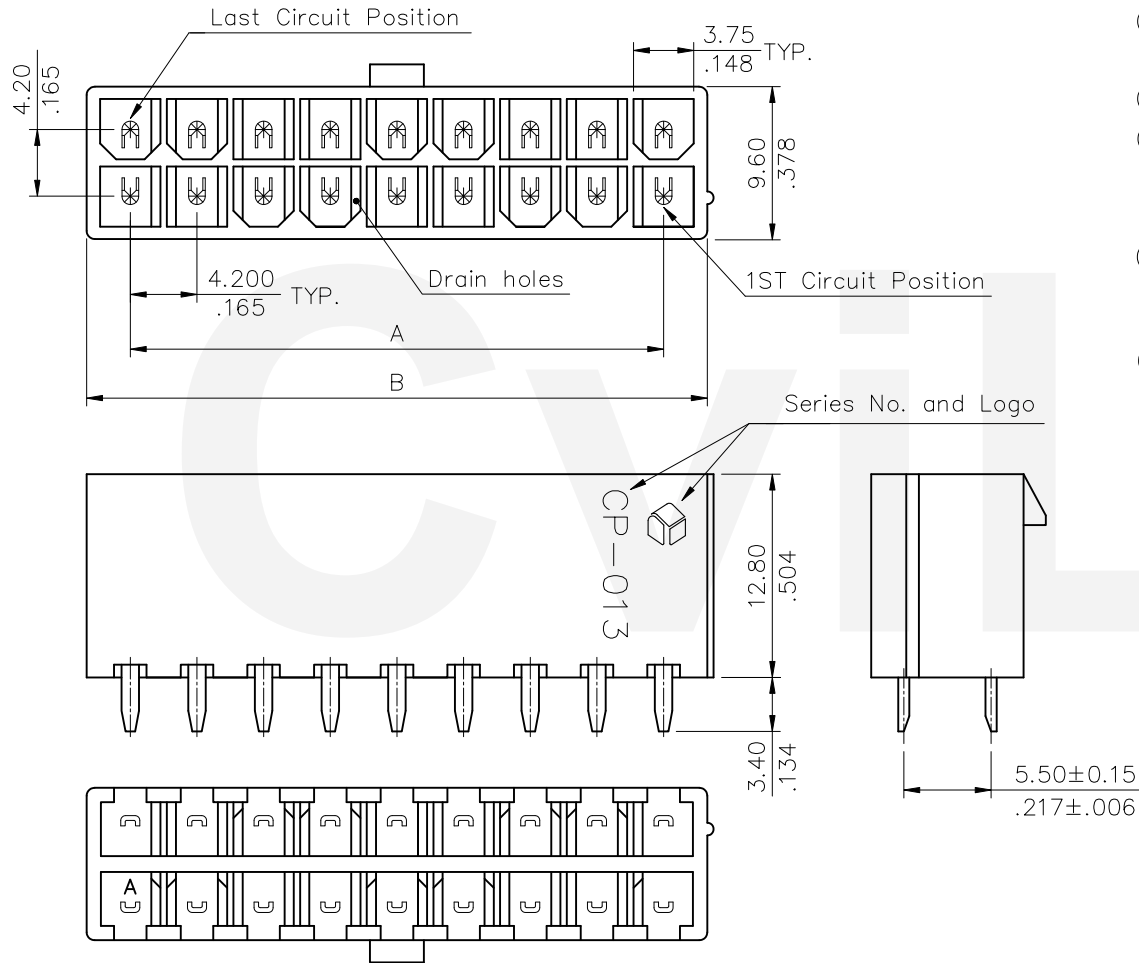

Recommended P.C. Board Layout

Halogen-Free Tin-Lead Process RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: STRAIGHT HEADER	瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Sandy	CP-01 POWER CONNECTOR		
②					ENGINEER: Sun	MATERIAL:		
①	Sandy	3/16-21'	ECNT121071/ECRT121011		CHECKED BY: Eisley	FINISH:		
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley		DRAWING NO. CP01108SB	PART NO. CP-013****C
							SCALE 2 / 1	SHEET 1 OF 1

2021.04.08
 ISSUED