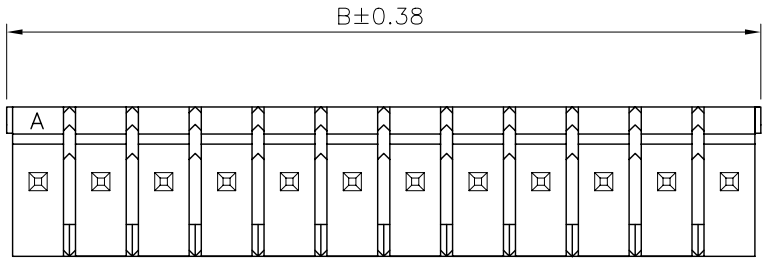


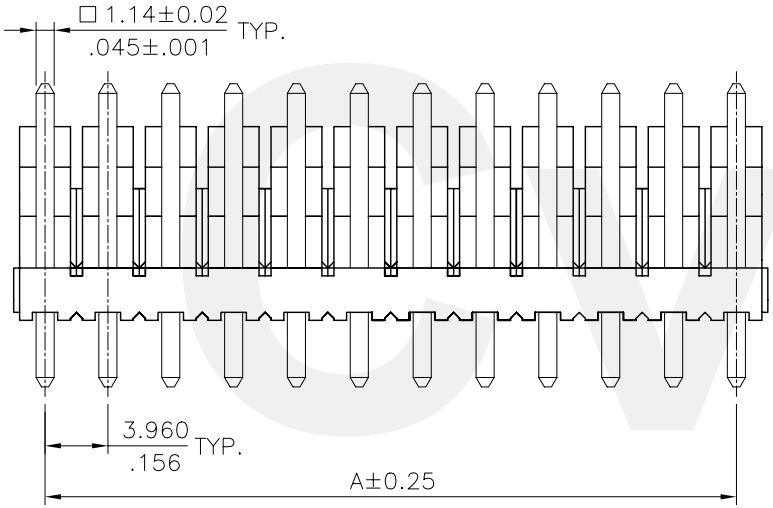


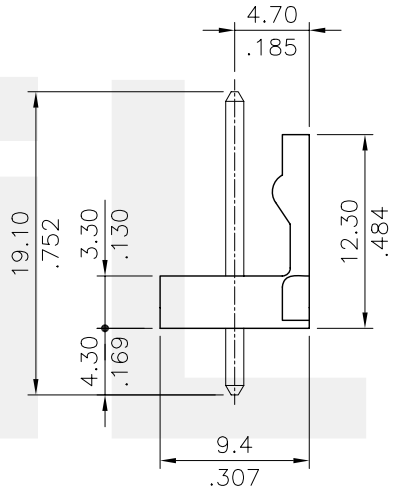


A = 3.96 x No. of Spaces
B = A + 3.96
* Available in 2 through 24 circuits

Material:
* Insulation: Glass filled polyester UL 94V-0
Color White(Nature)
* Contact: Brass

## Ordering Code:

| CI82 | ** | P | * | V | 00 |
|---|---|---|---|---|---|
| ① | ② | ③ | ④ | ⑤ | ⑥ |

① Series No.
② No. of Circuits
③ Contact type: P= Pin header
④ Plating option:
1= 3.05μm(120μ") Min. Tin over 0.76μm(30μ") Nickel
2= Gold flash plated over 1.27μm(50μ") Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
⑤ Tail Style: V= Straight
⑥ Option: 00= Standard

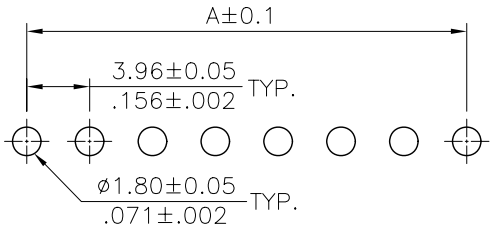


Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

| SYM | NAME | DATE | REVISIONS |
|---|---|---|---|
| 4 | | | |
| 3 | | | |
| 2 | | | |
| 1 | SUN | 9/30/03' | ECN03330/ECR03030-0 |

CVILUX CORP 2003.08.14 ISSUED

| | | DATE |
|---|---|---|
| DRAWN BY: | Sun | 11/02-04' |
| ENGINEER: | Eisley | 11/04-04' |
| CHECKED BY: | David | 11/04-04' |
| APPROVED BY: | Alex | 11/04-04' |

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

| | |
|---|---|
| .X ± 0.38/.015 | X.° ± 1° |
| .XX ± 0.25/.010 | .X° ± |
| .XXX ± 0.10/.004 | .XX° ± |

TITLE: 3.96MM(.156") STRAIGHT DIP HEADER

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

| DRAWING NO. | CI8201SD | PART NO. | CI82**P*V00 |
|---|---|---|---|
| SCALE | 2 / 1 | SHEET | 1 OF 1 |