

SPECIFICATIONS

Current Rating: 3AMP
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC for 1 minute
 Temperature Range: -25°C to +85°C






MATERIAL

Contact: Brass, Tin plated
 Insulator: LCP, UL94V-0

No. of contact	Dimensions			
	A	B	C	D
02	2.50	10.00	6.10	8.20
03	5.00	12.50	8.60	10.70
04	7.50	15.00	11.10	13.20
05	10.00	17.50	13.60	15.70
06	12.50	20.00	16.10	18.20
07	15.00	22.50	18.60	20.70
08	17.50	25.00	21.10	23.20
09	20.00	27.50	23.60	25.70
10	22.50	30.00	26.10	28.20
11	25.00	32.50	28.60	30.70
12	27.50	35.00	31.10	33.20
13	30.00	37.50	33.60	35.70
14	32.50	40.00	36.10	38.20
15	35.00	42.50	38.60	40.70
16	37.50	45.00	41.10	43.20

ORDER INFORMATION

W 2501 MR - XX

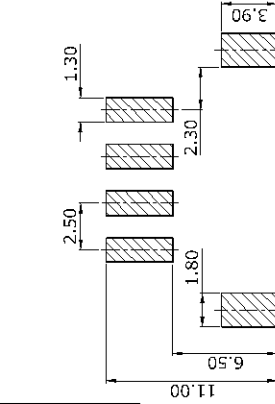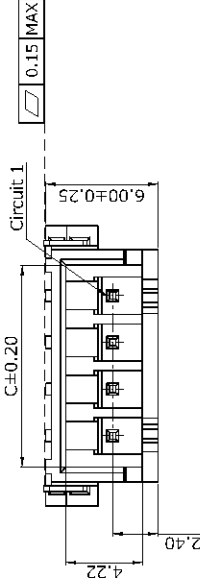

Recommended P.C.B Layout

PART NO.	W2501MR-XX	DRAWN					
	DRAWING NO.	W2501MR-XX	CHECKED				
	DATE		APPROVED				
REV.	A0	X ±0.25	XX ±0.20	SCALE	1:1	UNIT	mm
TITLE: 2.50mm Pitch Wafer SMT							