


CONSTRUCTION ITEM		NPIN
CONDUCTOR	SIZE	28AWG
	MATERIAL	TC
	CONSTRUCTION	7/Φ0.125±0.008mm
JCAKET	AVG. THICK	0.26mm
	MIN. THICK	0.18mm
	MATERIAL	45P 105°C UL-PVC All raw materials meet RoHS standards
	DIAMETER	0.90±0.05×(1.27*N)±0.20mm PH=1.27mm
	COLOR	GRAY#-PINK (HALF ATOMIZER)
MARKING	MARKING NO.	AWM 2651 VW-1 105°C 300V 28AWG
	COLOR	BLACK

ELECTRICAL CHARACTERISTICS

1. Conductor Resistance: AT 20°C Max: 28AWG 237.25 Ω/KM
2. Insulation Resistance: AT 20°C Min: 10M Ω/KM
3. Dielectric Strength: AC2000V 60HZ/min

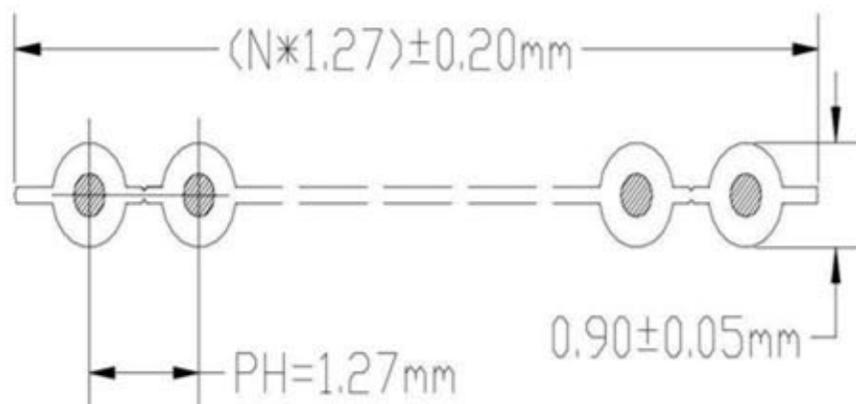

**RoHS
Compliant**

**B
Q
CABLE**

APPD.		TOLERANCE	PART NAME FLAT CABLE 1.27mm UL2651 XXP 28AWG GREY 1 ROLL=100F ROHS
DWG.		0 * .00 * ANG. *	
DATE	UNIT	SIZE	PART NO. FLC-XX/30-E
2012/05/11	M M	A 4	
	PAGE	REV.	
	1 OF 1	B	