



REVISION RECORD MODIFICATIONS	DATE	REV.
NEW	2019/01/03	A/0

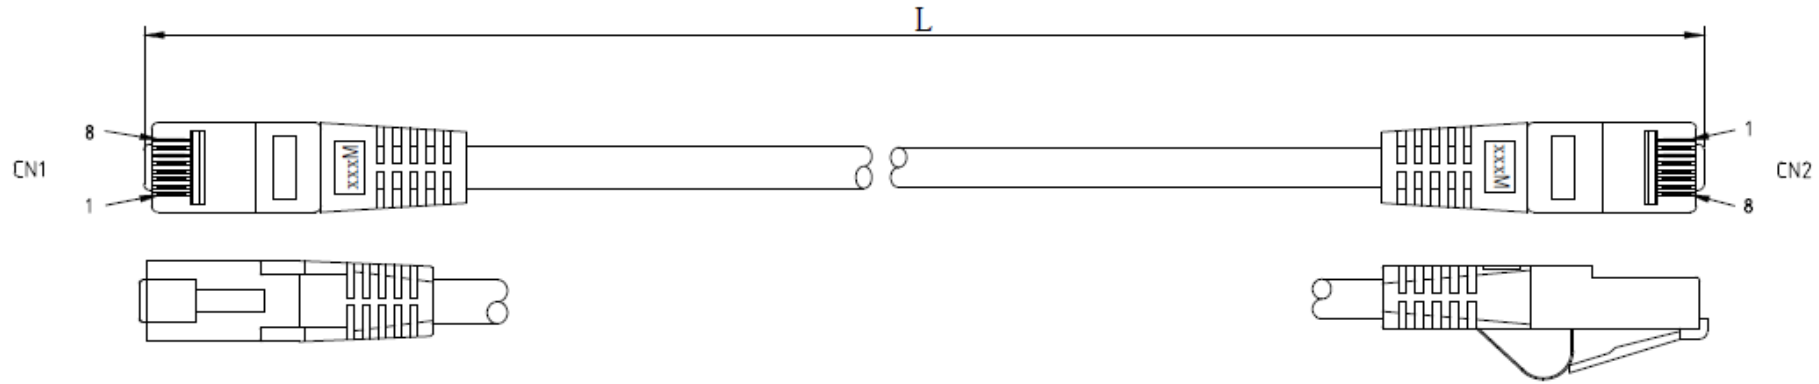

WIRING DIAGRAM

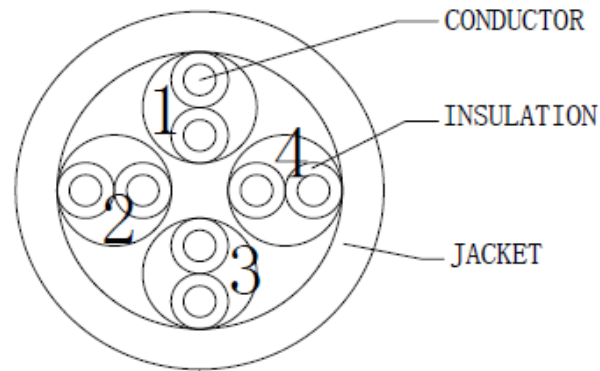

CN1 (568B)	CN2 (568B)
WHITE/ORANGE 1	1 WHITE/ORANGE
ORANGE 2	2 ORANGE
WHITE/GREEN 3	3 WHITE/GREEN
GREEN 6	6 GREEN
BLUE 4	4 BLUE
WHITE/BLUE 5	5 WHITE/BLUE
WHITE/BROWN 7	7 WHITE/BROWN
BROWN 8	8 BROWN

LENGTH	LENGTH TOLERANCE
250mm	±20mm
500mm	±20mm
1000mm	±30mm
1500mm	±30mm
2000mm	±40mm
3000mm	±60mm
5000mm	±110mm
7500mm	±150mm
10000mm	±200mm
15000mm	±310mm
20000mm	±400mm
25000mm	±500mm
30000mm	±600mm
50000mm	±1000mm

Printing: CAT.5E U/UTP PATCH CORD CABLE 100 MHz 4PAIRS ISO/IEC 11801 & EN50173-1 & ANSI/TIA-568-C.2 ## 925 ##

DESCRIPTIONS:

- . CABLE:CAT 5e U/UTP STRANDED WIRES AWG27
- . WIRES:CCA AWG27 (7/0.13±0.008MM) x 4 TWISTED PAIRS
- . PLUG:RJ45 8P8C FU" GOLD-PLATED ON CONTACT AREA TRANSPARENT COLOR
- . MOLDING:PVC MOLDING COLOR :ACCORDING TO CUSTOMER REQUIREMENTS
- . CABLE JACKET:PVC,ACCORDING TO CUSTOMER REQUIREMENTS OD:4.6±0.3MM
- . WIRES CONNECTION BASE ON TIA/EIA 568B
- . PACKING: ACCORDING TO CUSTOMER REQUIREMENTS
- . CABLE LENGTH: xxx METERS

DRAW NO.	WS00002	PRODUCT NAME	Cat5e U/UTP 8P8C/M TO 8P8C/M		
CUSTOMER		VIEW	Tolerance		
ITEM NO.	Cat5e U/UTP		X	±1.00	
			X.X	±0.50	
APPOBY	CHECKBY	DRAWNBY	UNTT	MM	
			Page	1 of 1	

NO.	PARTS	NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK