

RoHS
Conformity

VISIBLE LIGHT PRODUCTS

(Super Bluish-Green Light Emitting Diode)

REV:A

DATE:2006/1/11


SAFETY ESD PRODUCTS !

DEVICE NO:HB5d-433EBA-D

LENS COLOR:

colored diffusion		colored transparent		white diffusion	✓	water clear
-------------------	--	---------------------	--	-----------------	---	-------------

PACKAGE DIMENSIONS:

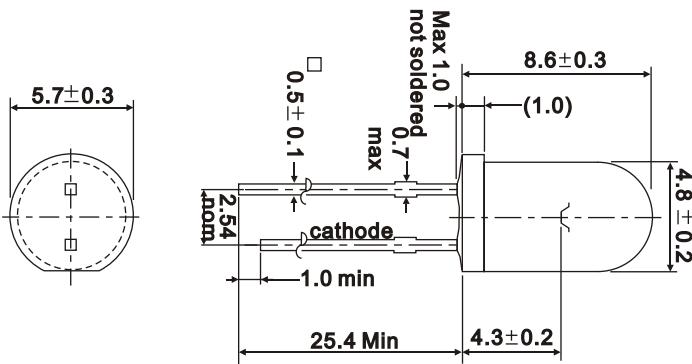

NOTE:
 1. All dimensions are in millimeter.
 2. Lead spacing is measured where the lead emerge from the package.
 3. Protruded resin under flange is 1.5mm max.
 4. Specifications are subject to change without notice.
 5. Tolerance is 0.3mm unless otherwise noted.

ABSOLUTE MAXIMUM RATINGS:

TA=25°C

PARAMETER	SYMBOL	MAX. RATING		UNIT
Power Dissipation	Pd	120		mW
Continuous Forward Current	IF	30		mA
Peak Forward Current *1	IFM	100		mA
Reverse Voltage	VR	4		V
LED Junction Temperature	Tj	100		°C
Operating Temperature	Topr	-25 ~ +85		°C
Storage Temperature	Tstg	-40 ~ +100		°C
Lead Soldering Temperature (1.6mm from case bottom 260 °C for 5 seconds)				

ELECTRIC-OPTICAL CHARACTERISTICS:

TA=25°C

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
View Angle of Half Power	2θ1/2	IF=20mA		13		Degree
Forward Voltage	VF	IF=20mA		3.7	4.2	V
Luminous Intensity *2	IV	IF=20mA	2800	5400		mcd
Peak Emission Wavelength	λp	IF=20mA		502		nm
Dominate Wave Length *3	λd(HUE)	IF=20mA	500	505	510	nm
Spectrum Width of Half Valve	Δλ	IF=20mA		30		nm

*1.Duty Ratio=1/10,Pulse Width=0.1ms.

*2.Tolerance:30%, measuring equipment :1.EXELTRON 2001. 2.S370 made by U.D.T.

*3.The dominate wavelength is derived from the CIE Chromaticity Diagram and represents the color of the device.

HUEY JANN ELECTRONICS INDUSTRY CO., LTD.