

Tastomat

Tastomat 100 - 200



TAS 100

Order no.: 08100000

* = Available on request.

Characteristics

Colour of enclosure group

Light grey

Protection class

IP 65

Enclosure Material

PA-GB, Neoprene CR seal; see Technical Information for details

Scope of delivery

Base, lid, 6 enclosure screws, 4 mounting screws

Note


In case of prolonged heat (e.g. at 75°C for 3 hours) an after-shrinkage of the material by up to 0.8% is possible. To a similar extent, absorption of humidity may affect dimensions.

Dimensions

Dimensions

251 x 91 x 46 mm

Product drawing

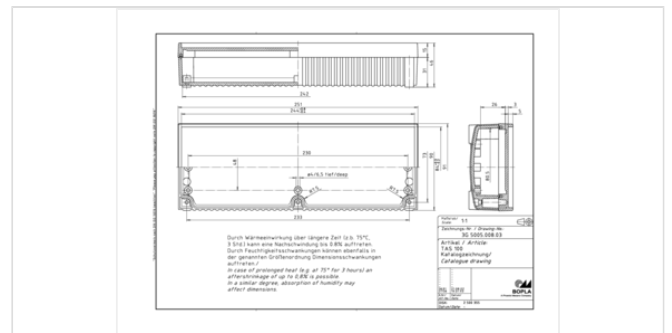

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 08100000 TAS-100.stp (1.4 MB)

Drawing for mechanical processing: 08100000 TAS-100-G.dxf (726.4 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 08100000 TAS-100.pdf (57.8 KB)

Product drawing in DXF format: 08100000 TAS-100.dxf (518.0 KB)

Product information

tastomat en.pdf (145.8 KB)

18.10.2022

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Matching accessories



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006101 SHR Z B4,5x7,8

SD = 4.5 / ND = 4.0 / KD = 7.5