


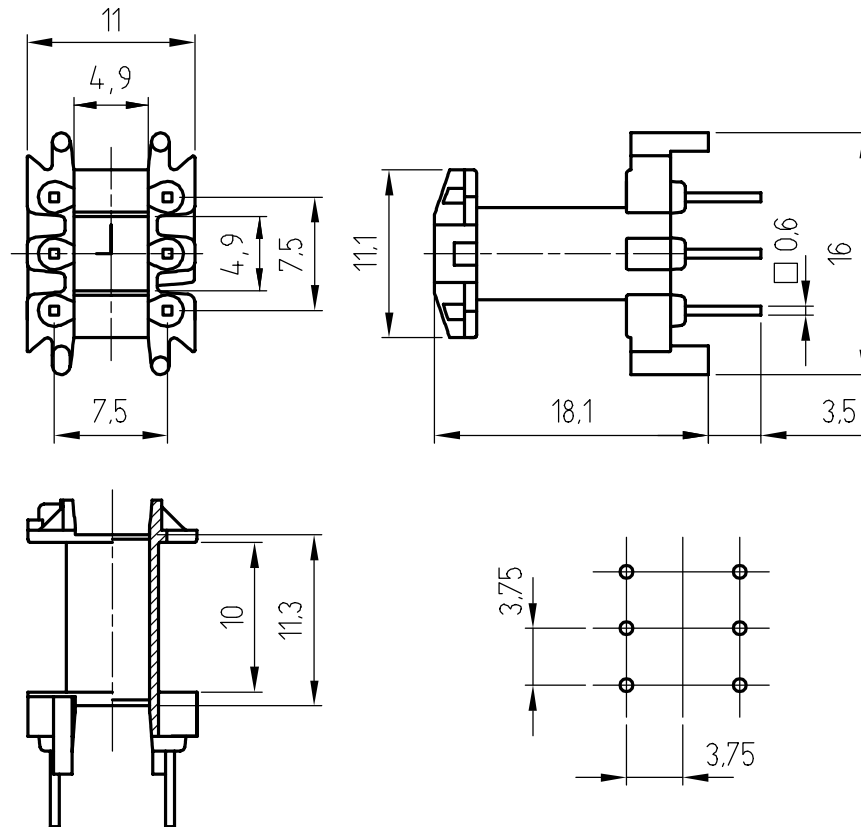

[mm]

A_N in mm ²	25,0
l_N in mm mittlere Weglänge average path length	33,3
max. Stiftanzahl max. no. of pins	6
Standardmaterial Kunststoff standard plastic material	Polyamid (z.B. Ultramid)
Standardmaterial Anschlussstifte standard material pins	Nickel Silver CuNi18Zn20 (coating: 1µm Ni, 5-7 µm Sn 100)
Bestell.-Nr. Ordering no.	501 160 210 117
Bemerkung remark	- -

Bestiftungsvarianten möglich / Pin connections variable

Schutzrecht nach DIN 34 beachten Copyright according to DIN 34				Freimaßtoleranzen ☐ DIN 7168 m ☒ DIN 16901		Oberfläche	Maßstab	Position	Menge	
				Datum	Name	SP - E 16/5 - 1746 - 6B S-A				
				Bearb.	02.11.2001					Eberwien
				Gepr.						
				Norm						
				KASCHKE KG GmbH & Co. 37079 Göttingen			SP 1746 K			Blatt
a	Bestellnr. geä.	07.05.02	Y.E.							
Zust.	Änderungen	Datum	Name	Dateiname Sp1746K						