

Euromas ABS / PC / F05

Enclosure, polycarbonate



M 255 G

Order no.: 02255100

* = Available on request.

Characteristics

Colour of enclosure group

Light grey

Protection class

IP 65

Impact protection

IK 07

Enclosure Material

ABS, PC (UV stabilised) and selected sizes in PC UL 94 V0 (additional UL 94 V0 versions on request), seal made of CR; V215: Vestamid, CR seal; for details see Technical Information

Scope of delivery

Lid and base, lid screws made of V2A, self-tapping screws for mounting bosses

Note

G = Design with crystal-clear lid.


IP = Ingress protection acc. to DIN EN 60529

Dimensions

Dimensions

360 x 200 x 149.5 mm

Product drawing

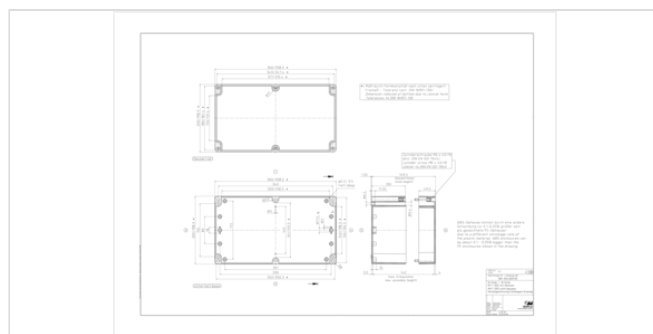

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 02255100 M-255-G.stp (885.3 KB)

Drawing for mechanical processing: 02255100 M-255-G-G.dxf (741.3 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

21.10.2022

Product drawing in PDF format: 02255100 M-255-G.pdf (119.8 KB)

Works Test Certificates

670 WPZ-Euromas-PC DE.pdf (197.3 KB)

670 WPZ-Euromas-PC EN.pdf (191.1 KB)

Product information

euromas-abs-pc-f05 en.pdf (1.1 MB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Matching accessories



Mounting plates, laminated paper, galvanised steel for version 260

22001600 M M 255

For M/T 255



DIN rails DIN EN 60715 G 32, galvanised steel

22002950 TS 32

For M/T 255



Set of hinges

22006000 SchM



Threaded inserts for mounting bosses

59002810 DODGE M3x6,5

ND = 4.0 x 6.5

59002820 DODGE M4x9,5

ND = 5.4 x 9.5



Rubber feet, plug-in

22003300 F

For M/T 208-260



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006110 SHR Z B6,3x9,5

SD = 7.0 / ND = 5.5 / KD = 12.5

