

## LEILA-Y-RS

~10° spot beam. 14.8 mm high assembly with holder, installation tape and pins.

### SPECIFICATION:

Dimensions	Ø 21.6 mm
Height	14.8 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish	Length
LEILA-Y-RS	Single lens	PMMA	clear	gloss	20.0
LEILA-Y-HLD	Holder	PC	black	gloss	21.6
LEILA-Y-TAPE	Tape	Acrylic foam			18.0

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA18089_LEILA-Y-RS » Box size: 476 x 273 x 197 mm	1800	180	180	7.6


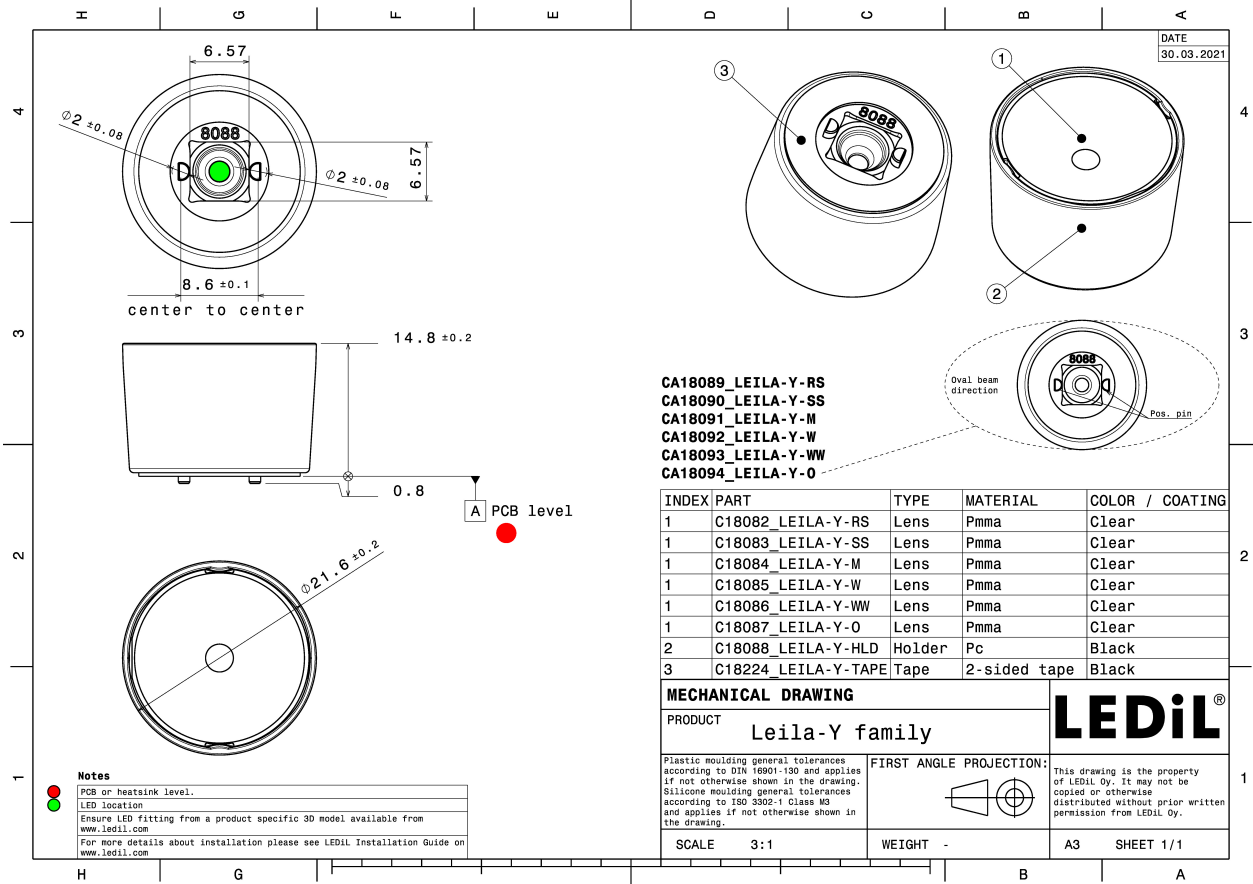


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

### OPTICAL RESULTS (MEASURED):





LED XP-G4  
 FWHM / FWTM 13.0° / 21.0°  
 Efficiency 87 %  
 Peak intensity 14.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

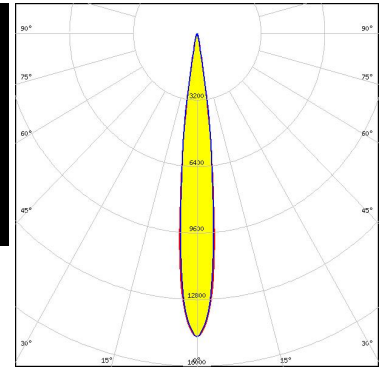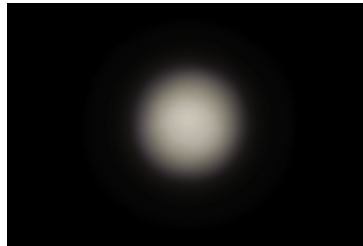

Light distribution files





LED NVSW719AC  
 FWHM / FWTM 12.0° / 21.0°  
 Efficiency 87 %  
 Peak intensity 15.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

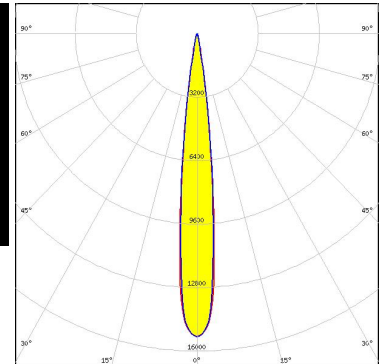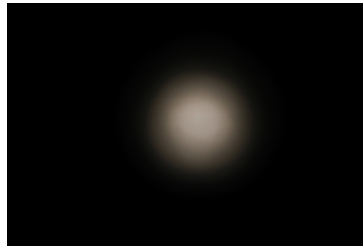

Light distribution files



LED OSOLON Pure 1414  
 FWHM / FWTM 19.0° / 29.0°  
 Efficiency 82 %  
 Peak intensity 7.3 cd/lm  
 LEDs/each optic 4  
 Light colour/type RGBW  
 Required components:

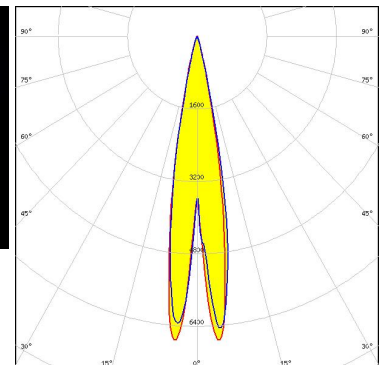
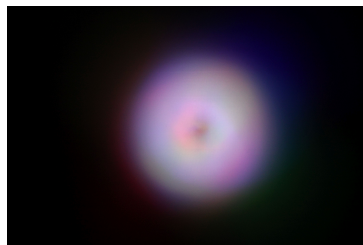


Light distribution files

### OPTICAL RESULTS (MEASURED):

**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM 11.0° / 20.0°  
Efficiency 87 %  
Peak intensity 17.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

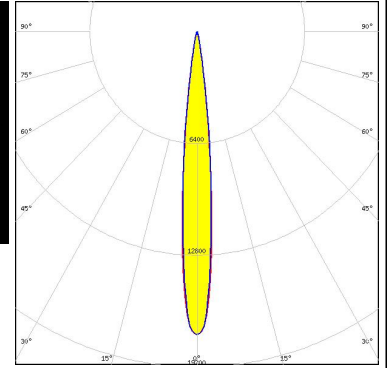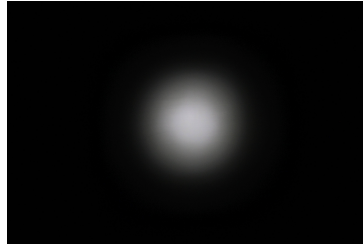


Light distribution files

### OPTICAL RESULTS (SIMULATED):




LED J Series 3030C  
FWHM / FWTM 12.0° / 24.0°  
Efficiency 88 %  
Peak intensity 14.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

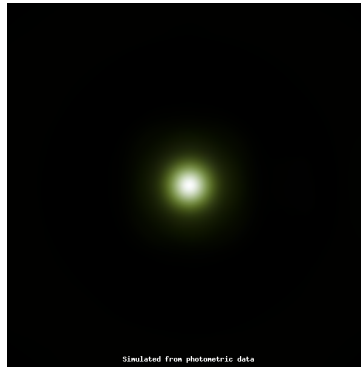


Light distribution files



LED J Series 5050B 6V K Class  
FWHM / FWTM 20.0° / 41.0°  
Efficiency 79 %  
Peak intensity 4.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

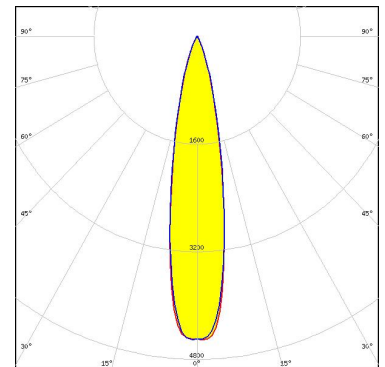

LED XHP35 HD  
FWHM / FWTM 18.0° / 35.0°  
Efficiency 79 %  
Peak intensity 6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

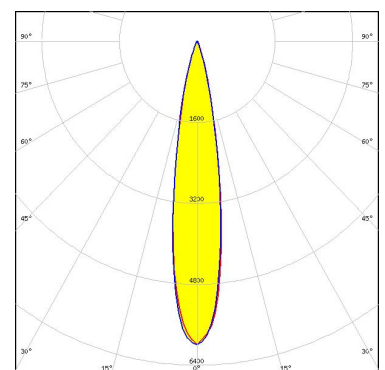


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XHP35 HI  
 FWHM / FWTM 14.0° / 26.0°  
 Efficiency 87 %  
 Peak intensity 11.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

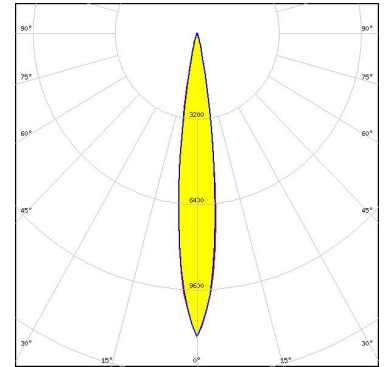

Light distribution files




LED XHP35.2 HI  
 FWHM / FWTM 18.0° / 32.0°  
 Efficiency 83 %  
 Peak intensity 7.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

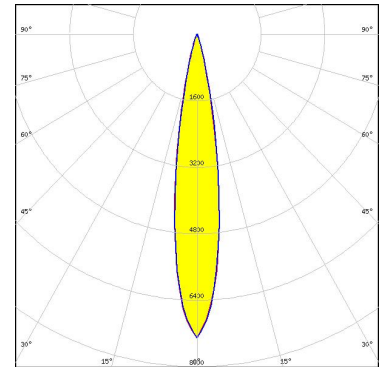

Light distribution files



LED XM-L RGBW (XMLDCL HD)  
 FWHM / FWTM 22.0° / 36.0°  
 Efficiency 80 %  
 Peak intensity 4.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type RGBW  
 Required components:

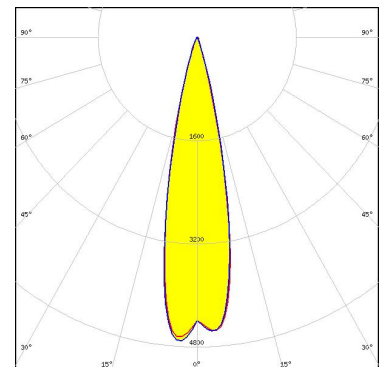


Light distribution files

### OPTICAL RESULTS (SIMULATED):




LED XM-L2  
FWHM / FWTM 16.0° / 30.0°  
Efficiency 85 %  
Peak intensity 8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

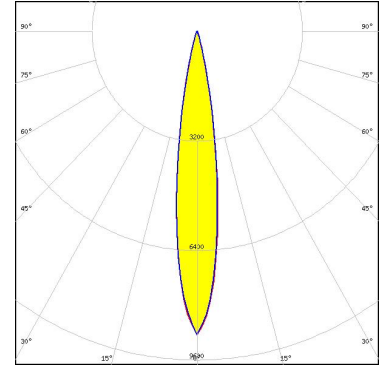

Light distribution files



LED XM-L3  
FWHM / FWTM 15.0° / 29.0°  
Efficiency 80 %  
Peak intensity 8.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

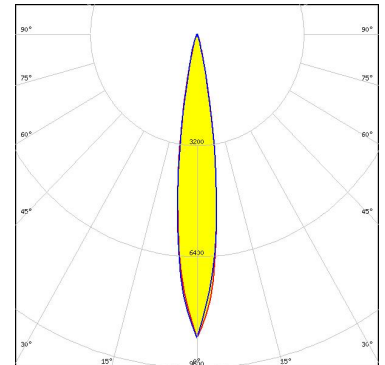

Light distribution files




LED XP-E  
FWHM / FWTM 10.0° / 18.0°  
Efficiency 90 %  
Peak intensity 26.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

### OPTICAL RESULTS (SIMULATED):




LED XP-E2  
FWHM / FWTM 9.0° / 18.0°  
Efficiency 91 %  
Peak intensity 30 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

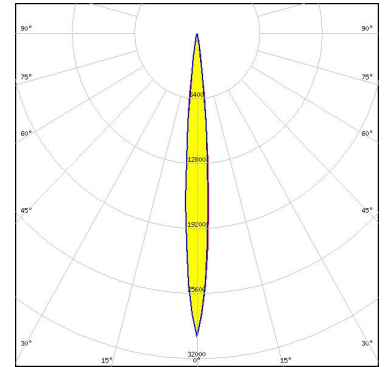

Light distribution files




LED XP-G2  
FWHM / FWTM 11.0° / 21.0°  
Efficiency 90 %  
Peak intensity 19 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

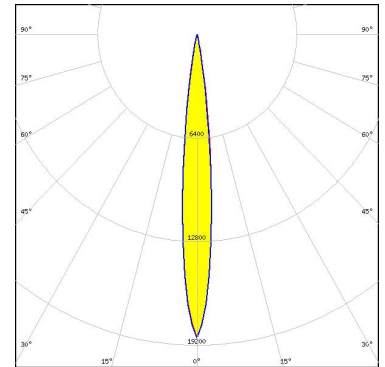

Light distribution files



LED XP-G3  
FWHM / FWTM 13.9° / 25.4°  
Efficiency 85 %  
Peak intensity 11.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

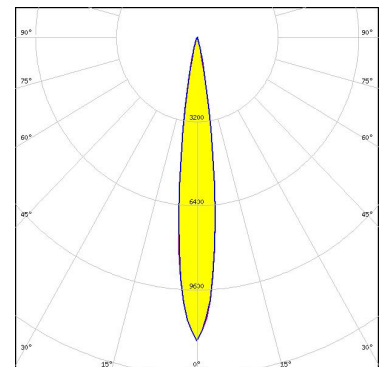

Light distribution files




### OPTICAL RESULTS (SIMULATED):



LED XP-G4 HI  
 FWHM / FWTM 10.0° / 20.0°  
 Efficiency 88 %  
 Peak intensity 19.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White

Required components:

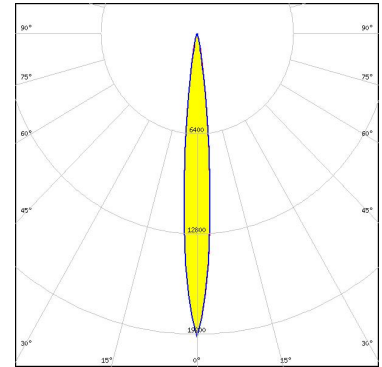


LED XP-L2  
 FWHM / FWTM 18.0° / 32.0°  
 Efficiency 80 %  
 Peak intensity 6.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White

Required components:



LED XP-L2  
 FWHM / FWTM 18.0° / 32.0°  
 Efficiency 81 %  
 Peak intensity 7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White

Required components:

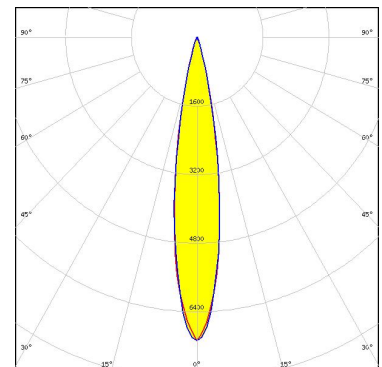


Light distribution files


### OPTICAL RESULTS (SIMULATED):



**LED** XQ-E HD  
**FWHM / FWTM** 14.0 + 16.0° / 27.0 + 26.0°  
**Efficiency** 87 %  
**Peak intensity** 10.2 cd/lm  
**LEDs/each optic** 2  
**Light colour/type** White  
**Required components:**




21.2.2024	Detector Image: I1 luminance	Zemax
Simulation: I1, WVC Surface: I1, 100mm		Zemax OptiCADv21.3
Size: 200,000 x 200,000 x 0,111mm, #Pixel: 2000 x 2000 #, Total area: 40000		
Max. Illuminance: 1,01200000000		
Total Power: 1,172188100000		

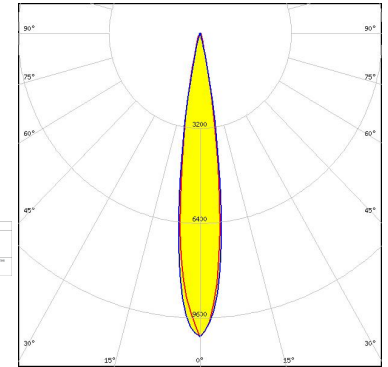


Light distribution files



**LED** XQ-E HI  
**FWHM / FWTM** 16.0 + 18.0° / 29.0 + 26.0°  
**Efficiency** 88 %  
**Peak intensity** 9.2 cd/lm  
**LEDs/each optic** 2  
**Light colour/type** White  
**Required components:**




21.2.2024	Detector Image: I1 luminance	Zemax
Simulation: I1, WVC Surface: I1, 100mm		Zemax OptiCADv21.3
Size: 200,000 x 200,000 x 0,111mm, #Pixel: 2000 x 2000 #, Total area: 40000		
Max. Illuminance: 1,01200000000		
Total Power: 1,148881000000		

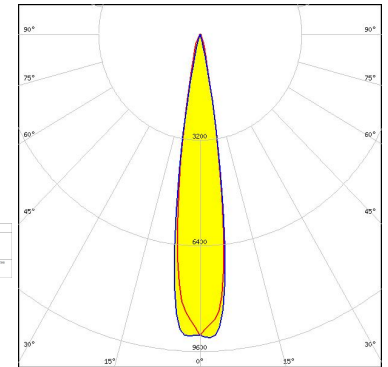

Light distribution files



**LED** LUXEON 5050 Round LES  
**FWHM / FWTM** 22.0° / 40.0°  
**Efficiency** 81 %  
**Peak intensity** 4.5 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

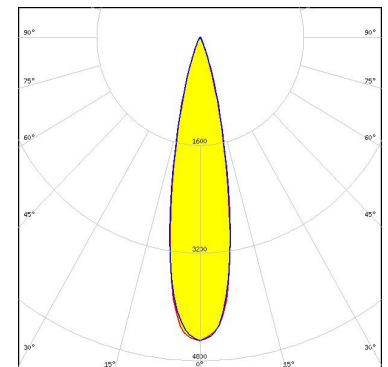


Light distribution files

### OPTICAL RESULTS (SIMULATED):

**LUMILEDS**

LED	LUXEON 5050 Square LES
FWHM / FWTM	20.0° / 40.0°
Efficiency	81 %
Peak intensity	4.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

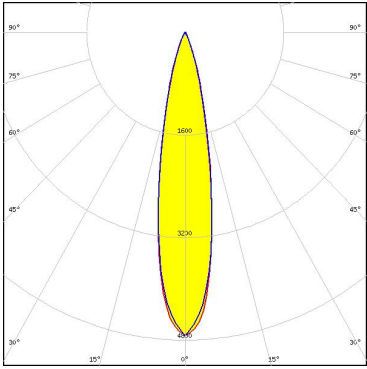

Light distribution files

**LUMILEDS**

LED	LUXEON CZ
FWHM / FWTM	8.0° / 16.0°
Efficiency	91 %
Peak intensity	35.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

**LUMILEDS**

LED	LUXEON HL2Z
FWHM / FWTM	11.0° / 24.0°
Efficiency	87 %
Peak intensity	16.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


### OPTICAL RESULTS (SIMULATED):



LED LUXEON Rubix  
FWHM / FWTM 8.0° / 16.0°  
Efficiency 92 %  
Peak intensity 33.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:




LED LUXEON TX  
FWHM / FWTM 12.0° / 23.0°  
Efficiency 88 %  
Peak intensity 16 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

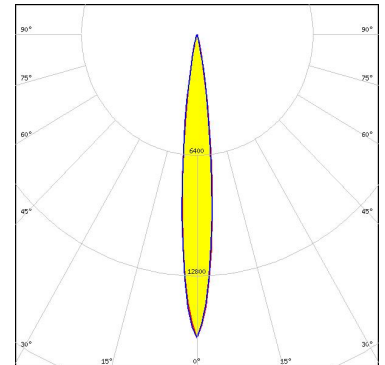

Light distribution files






LED LUXEON Z ES  
FWHM / FWTM 10.0° / 18.0°  
Efficiency 90 %  
Peak intensity 26 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

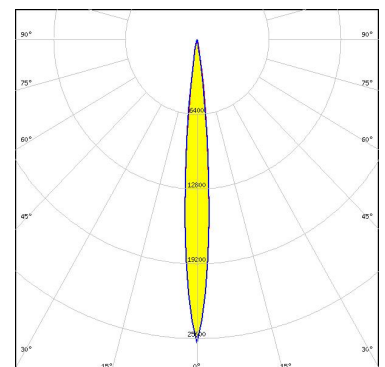

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

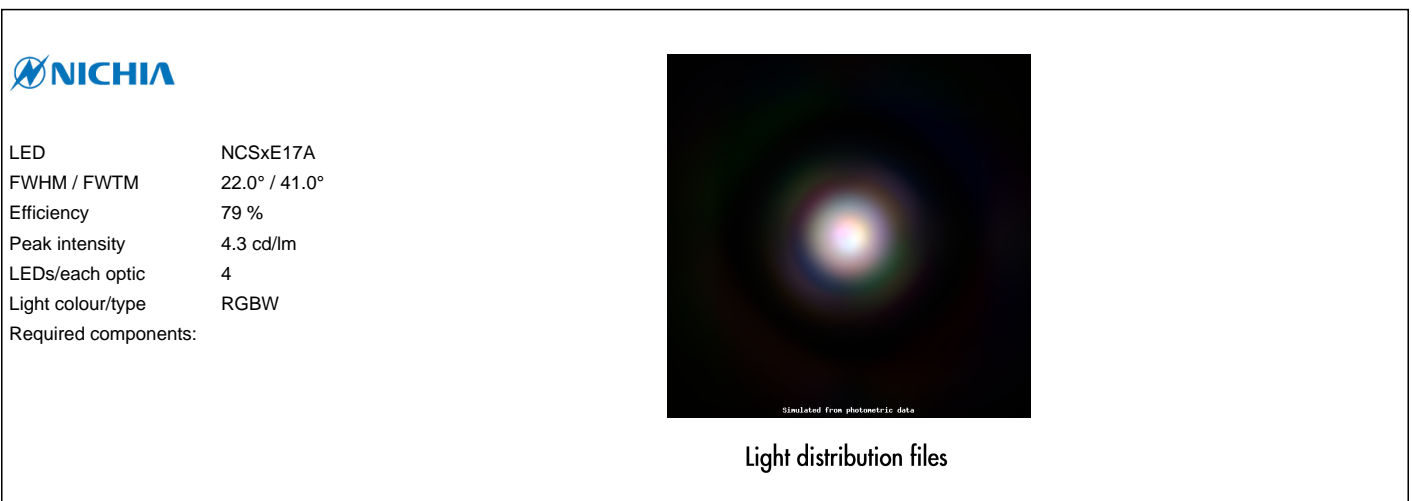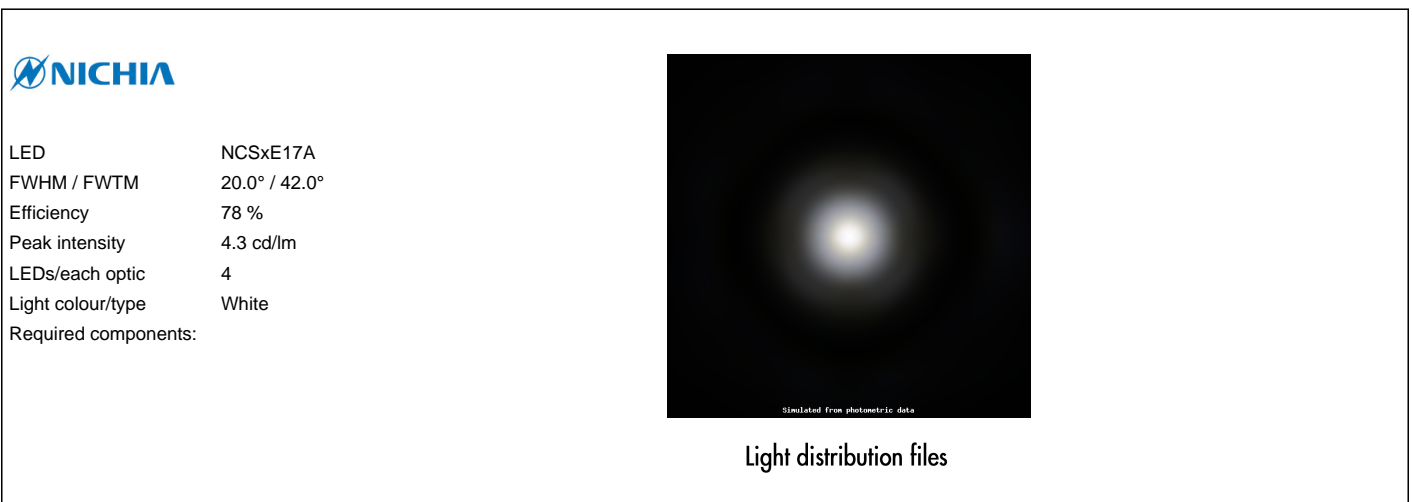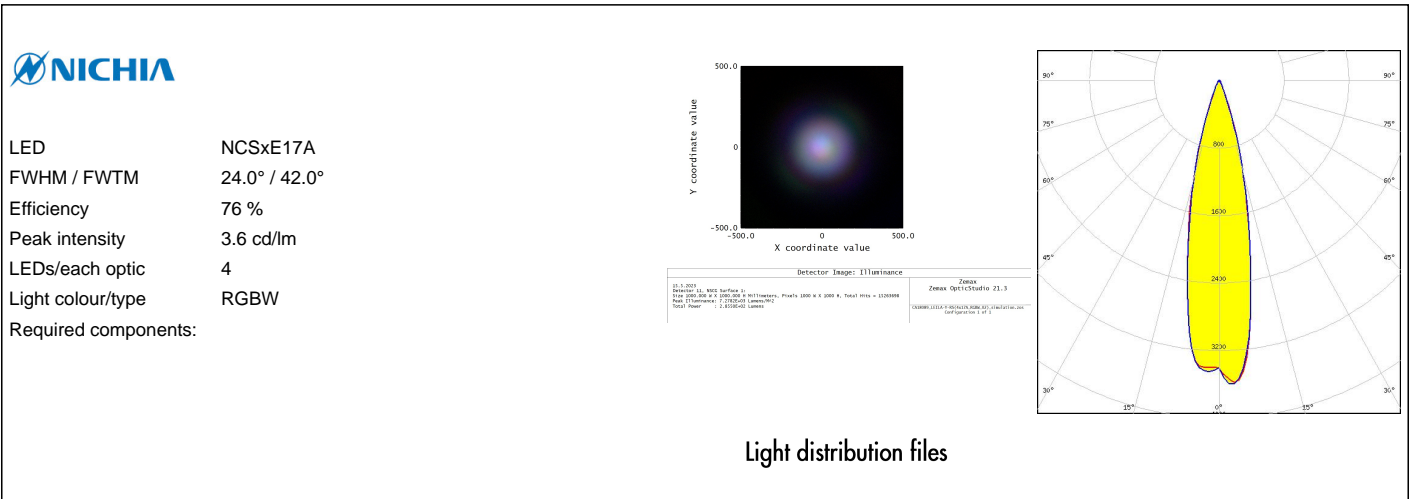


### OPTICAL RESULTS (SIMULATED):




LED NF2x757G  
FWHM / FWTM 12.0° / 24.0°  
Efficiency 88 %  
Peak intensity 13.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:



LED NFSx757G  
FWHM / FWTM 8.0° / 20.0°  
Efficiency 88 %  
Peak intensity 24 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


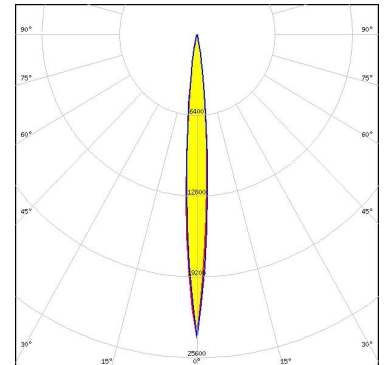


LED NVSW219F  
FWHM / FWTM 14.0° / 25.0°  
Efficiency 88 %  
Peak intensity 12 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

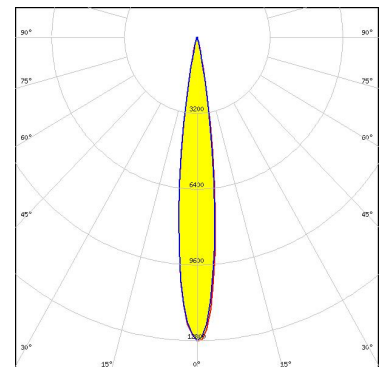

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

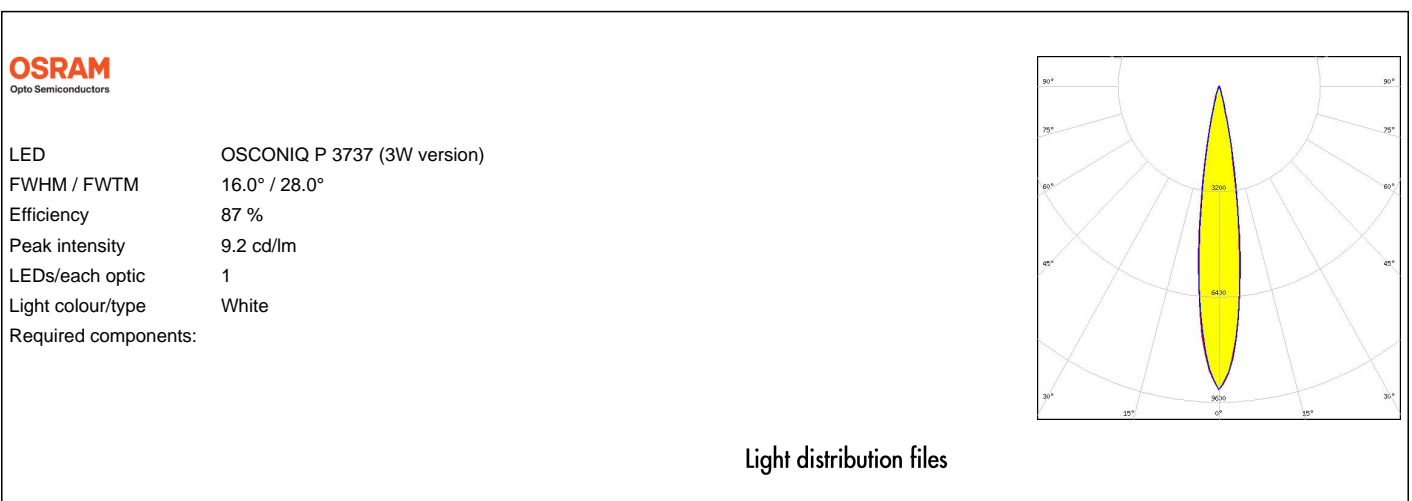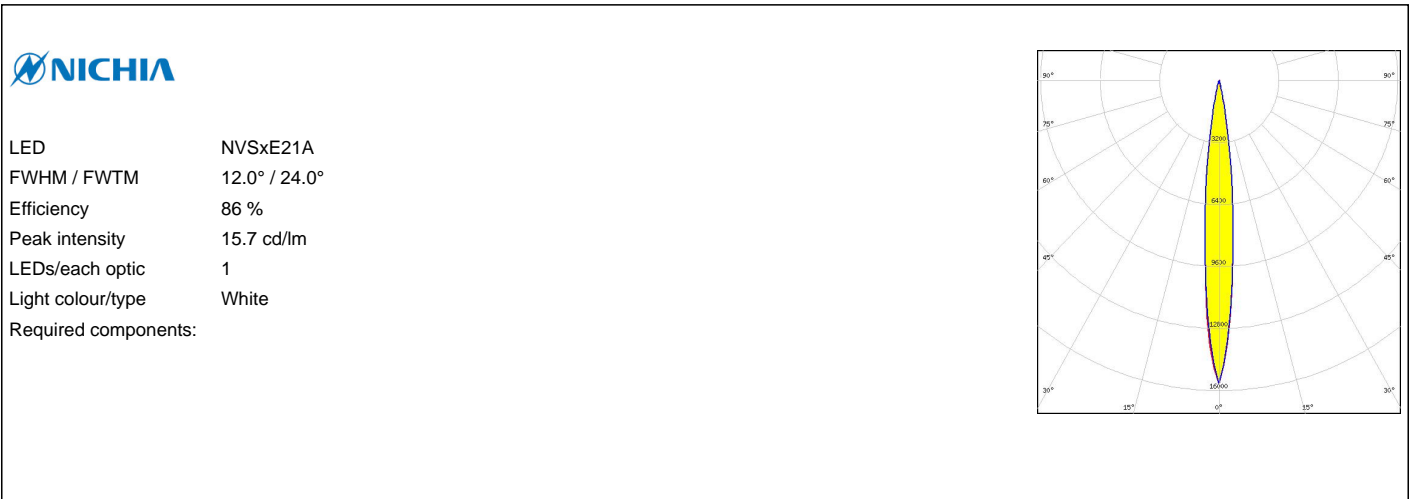

### OPTICAL RESULTS (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED OSCONIQ S 5050  
 FWHM / FWTM 22.0° / 42.0°  
 Efficiency 80 %  
 Peak intensity 4.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

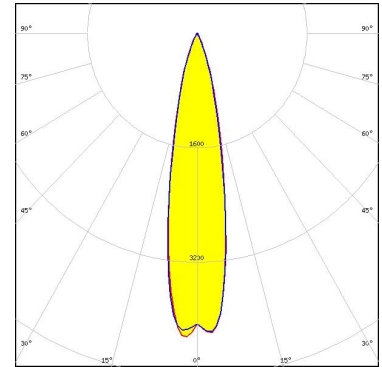


**OSRAM**  
Opto Semiconductors

LED OSLON Black Flat (LUW HWQP)  
 FWHM / FWTM 6.0° / 14.0°  
 Efficiency 90 %  
 Peak intensity 53.1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

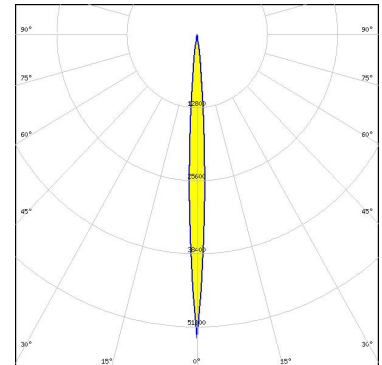

**OSRAM**  
Opto Semiconductors

LED OSLON Pure 1414  
 FWHM / FWTM 8.0° / 16.0°  
 Efficiency 91 %  
 Peak intensity 33.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

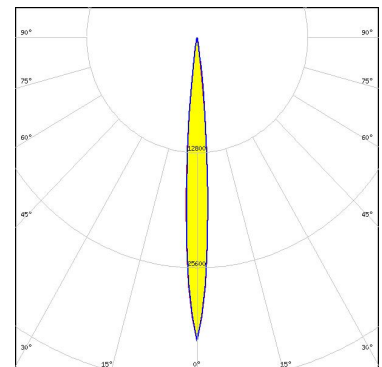




### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLOM Square CSSRM2/CSSRM3  
FWHM / FWTM 12.0° / 24.0°  
Efficiency 88 %  
Peak intensity 15 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

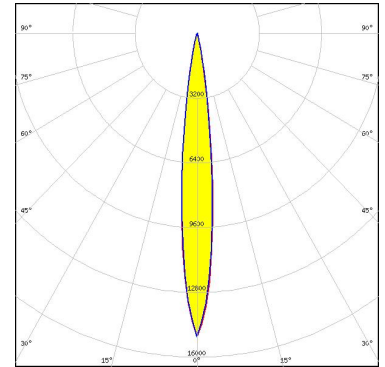

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSLOM Square CSSRM2/CSSRM3  
FWHM / FWTM 10.0° / 18.0°  
Efficiency 89 %  
Peak intensity 24.9 cd/lm  
LEDs/each optic 1  
Light colour/type Far Red  
Required components:

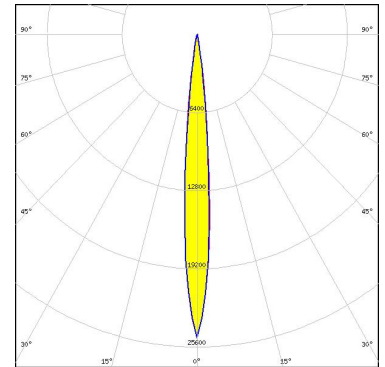

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLOM Square Flat  
FWHM / FWTM 10.0° / 20.0°  
Efficiency 90 %  
Peak intensity 22.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


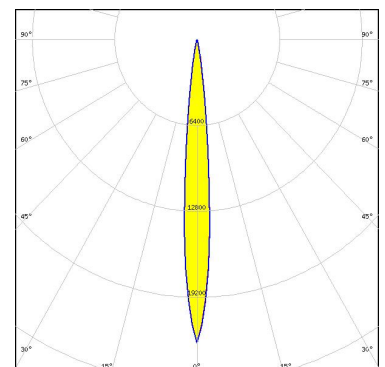


Light distribution files

### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSLON SSL 150  
 FWHM / FWTM 9.0° / 18.0°  
 Efficiency 91 %  
 Peak intensity 27 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

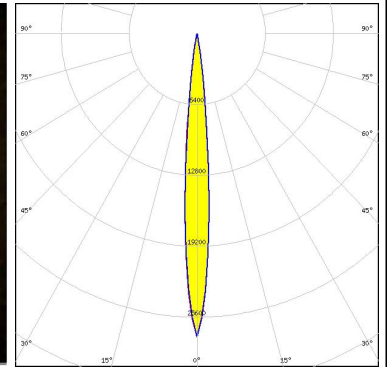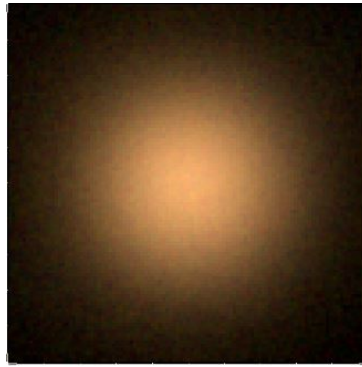


Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON SSL 150  
 FWHM / FWTM 10.0° / 18.0°  
 Efficiency 91 %  
 Peak intensity 25.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

**OSRAM**  
Opto Semiconductors


LED SYNIOS S2222  
 FWHM / FWTM 10.0° / 18.0°  
 Efficiency 90 %  
 Peak intensity 22.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type Blue  
 Required components:

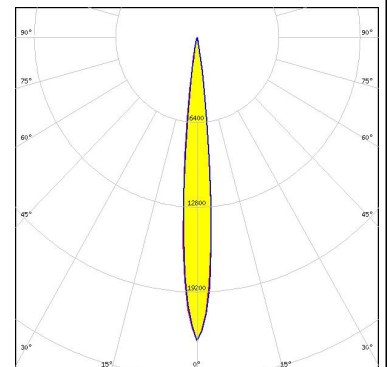

### OPTICAL RESULTS (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED SYNIOS S2222  
FWHM / FWTM 10.0° / 18.0°  
Efficiency 90 %  
Peak intensity 22.8 cd/lm  
LEDs/each optic 1  
Light colour/type Green  
Required components:

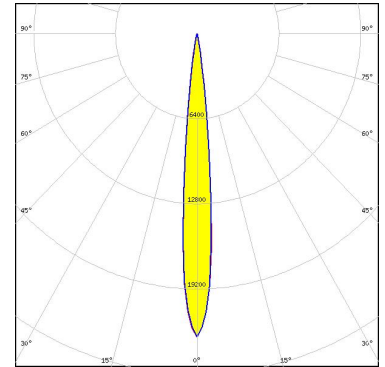


**OSRAM**  
Opto Semiconductors

LED SYNIOS S2222  
FWHM / FWTM 10.0° / 16.0°  
Efficiency 91 %  
Peak intensity 27 cd/lm  
LEDs/each optic 1  
Light colour/type Yellow  
Required components:

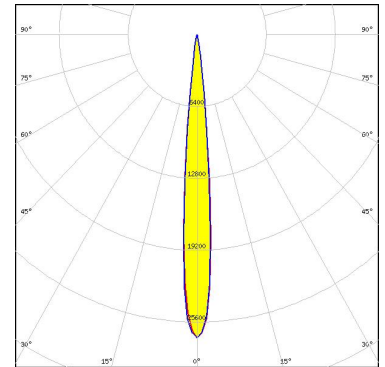

**OSRAM**  
Opto Semiconductors


LED SYNIOS S2222  
FWHM / FWTM 10.0° / 18.0°  
Efficiency 90 %  
Peak intensity 23.4 cd/lm  
LEDs/each optic 1  
Light colour/type Blue  
Required components:

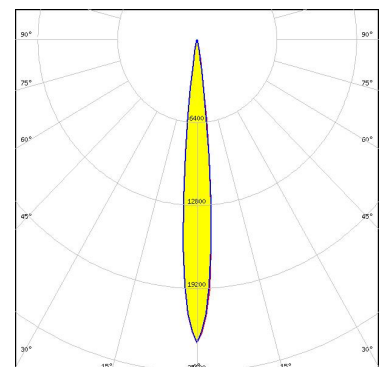

### OPTICAL RESULTS (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED SYNIOS S2222  
FWHM / FWTM 10.0° / 16.0°  
Efficiency 91 %  
Peak intensity 26.6 cd/lm  
LEDs/each optic 1  
Light colour/type Red  
Required components:

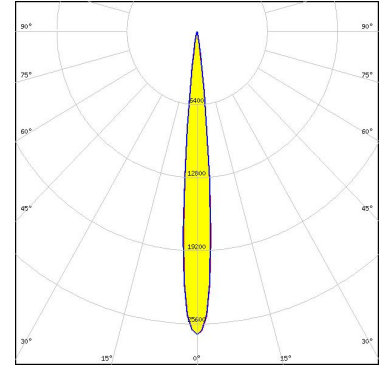

**SAMSUNG**


LED LH351B  
FWHM / FWTM 13.0° / 24.0°  
Efficiency 86 %  
Peak intensity 13 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

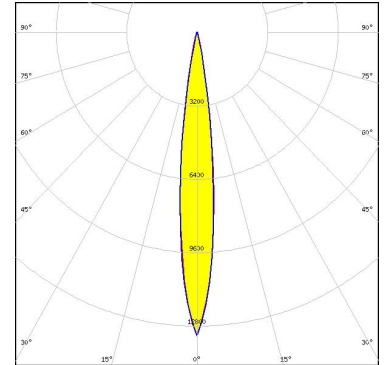

Light distribution files

**SEMI**  
SEOUL SEMICONDUCTOR

LED Z5M4  
FWHM / FWTM 15.0° / 28.0°  
Efficiency 87 %  
Peak intensity 10.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

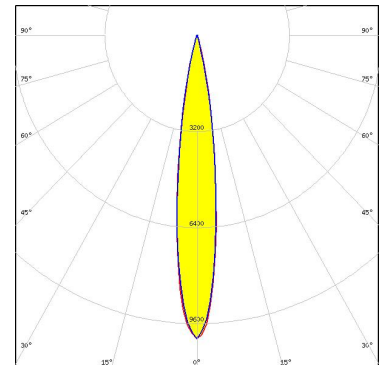

Light distribution files

## OPTICAL RESULTS (SIMULATED):



LED	MGN1108MS
FWHM / FWTM	10.0° / 16.0°
Efficiency	91 %
LEDs/each optic	1
Light colour/type	IR
Required components:	



LED	MJN1108MS
FWHM / FWTM	8.0° / 16.0°
Efficiency	92 %
LEDs/each optic	1
Light colour/type	IR
Required components:	

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)