

Element / Universal

Enclosure, plain



E 410

Order no.: 05410002

* = Available on request.

Characteristics

Colour of enclosure group
light grey/graphite grey

Protection class
IP 40


Enclosure Material
PS (polystyrene); for details see Technical Information

Scope of delivery
Lid, base, 4 fixing screws

Dimensions

Dimensions
100 x 50 x 25 mm

Product drawing

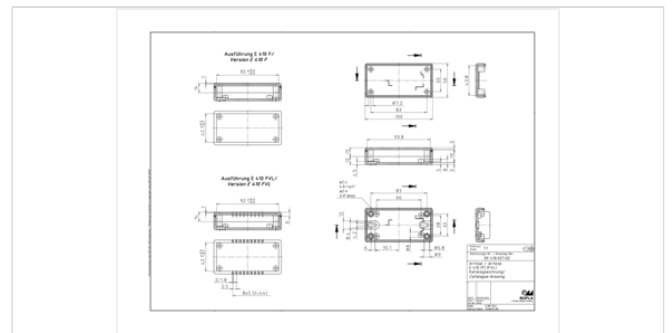

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 05410002 E-410.stp (731.0 KB)

Product drawing in PDF format: 05410002 E-410.pdf (66.8 KB)

Product drawing in DXF format: 05410002 E-410.dxf (753.2 KB)

Product information

element-universal en.pdf (833.2 KB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a

25.10.2022

pressure compensation element.

» Additional information

Matching accessories



Rubber feet

22009000 GF

Polyurethane, 65-75 Shore

Black



Wall brackets, nickel-plated sheet steel

25001500 E-WL

For E 406-E 450



Mounting panel, laminated paper

25000100* E-M

For E 410-E 420



Universal DIN rail holder TSH 35, polyamide

22035000 TSH 35

Black, similar to RAL 9005




Metal top hat rail adapter for DIN rail DIN EN 60715 TH 35

34035050 TSH 35 AL - 50

Width 50 mm, natural colour anodised

34035100 TSH 35 AL - 100

Width 100 mm, natural colour anodised



Universal rubber feet for stability of the enclosures on all surfaces

35800300 BOP-GF

Polyurethane, 65-75 Shore

Transparent



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006219 SHR Z KA30x6

SD = 3.0 / ND = 2.4-2.6 / KD = 5.3