

Euromas Aluminium / Euromas F05

Enclosure, aluminium, with silicone lid seal



A 101 SIL

Order no.: 01101010

* = Available on request.

Characteristics

Colour of enclosure group

Grey, similar to RAL 7001

Protection class

IP 66

Enclosure Material

G Al Si 12, PU foamed seal

For details see Technical Information

Scope of delivery

Lid and base, lid screws (V2A), 4 screws for installation/earthing

Note


On the A 198, because of the wall-mounting drill holes inside the sealed lip, expert sealing of the wall-mounting is necessary to achieve protection class IP 66.

Dimensions

Dimensions

58 x 64 x 34 mm

Product drawing

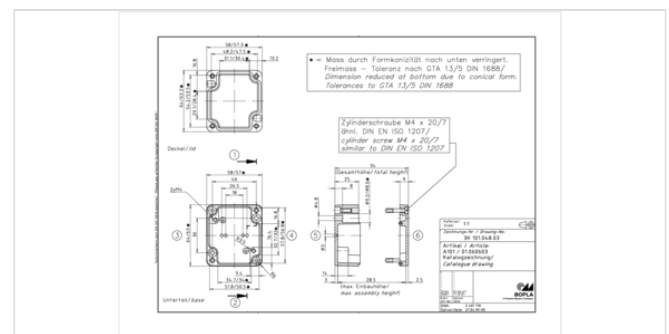

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 01101010 A-101-SIL.stp (677.7 KB)

Drawing for mechanical processing: 01101010 A-101-SIL-G.dxf (287.9 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 01101010 A-101-SIL.pdf (61.8 KB)

Product drawing in DXF format: 01101010 A-101-SIL.dxf (471.8 KB)

26.10.2022

Works Test Certificates

682 WPZ-Euromas-Aluminium DE.pdf (163.7 KB)

682 WPZ-Euromas-Aluminium EN.pdf (143.7 KB)

Product information

euromas-aluminium-euromas-f05 en.pdf (992.0 KB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» [Additional information](#)

Matching accessories



DIN rails DIN EN 60715 TH 15, galvanised steel

21002650 TS 15

For A 101



Set of hinges

21007800 SCHED



Capstan-headed screws, sealable

21007915 KP

For A 100-118



Allen cheese-head screw for lid

21007920 IS

For A 101-118