

Element / Universal

Enclosure with snap lock



U 75

Order no.: 06075000

* = Available on request.

Characteristics

Colour of enclosure group

light grey/graphite grey

Protection class

IP 40

Enclosure Material

PS (polystyrene); for details see Technical Information

Scope of delivery

Lid, base

Note


If required, the locking function can be permanently fixed by means of screws.

Dimensions

Dimensions

75 x 75 x 40 mm

Product drawing

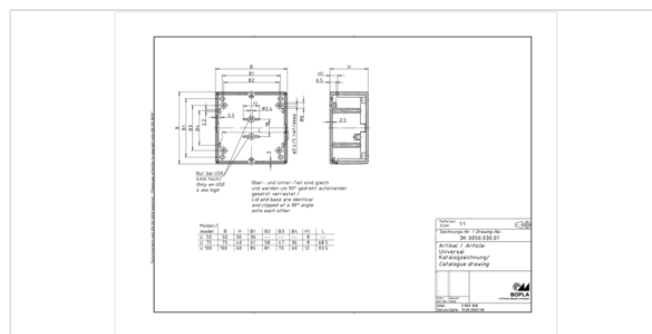

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 06075000 U-75.stp (571.1 KB)

Drawing for mechanical processing: 06075000 U-75-G.dxf (515.6 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 06075000 U-75.pdf (46.3 KB)

Product drawing in DXF format: 06075000 U-75.dxf (383.8 KB)

Product information

element-universal en.pdf (833.2 KB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Matching accessories



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006219 SHR Z KA30x6

SD = 3.0 / ND = 2.4-2.6 / KD = 5.3