

Element / Universal

Enclosure with snap lock



U 100

Order no.: 06100000

* = Available on request.

Characteristics

Colour of enclosure group
light grey/graphite grey

Protection class
IP 40

Enclosure Material
PS (polystyrene); for details see Technical Information

Scope of delivery
Lid, base


Note

If required, the locking function can be permanently fixed by means of screws.

Dimensions

Dimensions
100 x 100 x 60 mm

Product drawing

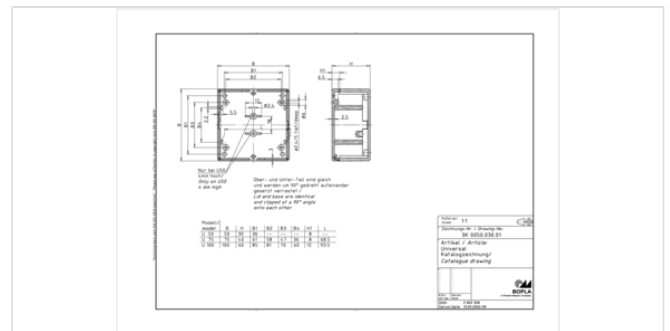

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 06100000 U-100.stp (536.4 KB)
Drawing for mechanical processing: 06100000 U-100-G.dxf (516.0 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 06100000 U-100.pdf (46.3 KB)
Product drawing in DXF format: 06100000 U-100.dxf (383.8 KB)

Product information

element-universal en.pdf (833.2 KB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Matching accessories



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006219 SHR Z KA30x6

SD = 3.0 / ND = 2.4-2.6 / KD = 5.3