

BOS

BOS 400/400 ASC with compartment for 9V block battery



BOS 400 ASC

Order no.: 34400500

* = Available on request.

Characteristics

Colour of enclosure group

Black, similar to RAL 9005

Protection class

IP 40

Enclosure Material

ABS, seal made of CR; for details see Technical Information

Scope of delivery

Lid, base, battery compartment lid, battery compartment side, screws


For BOS 400 ASC, plus integrated clip bearing and bow

Dimensions

Dimensions

100 x 65 x 24 mm

Product drawing

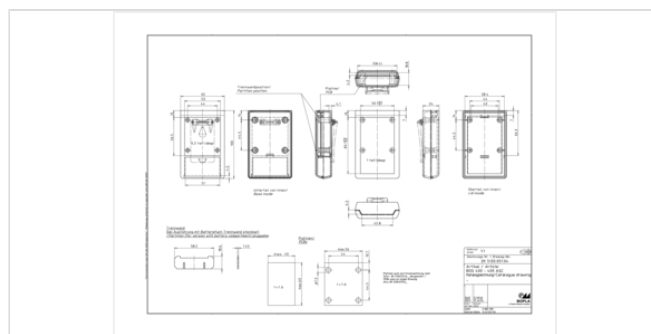

Note

34165572). Wall fitting for ASC types: see general accessories.

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 34400500 BOS-400-ASC.stp (2.9 MB)

Drawing for mechanical processing: 34400500 BOS-400-ASC-G.dxf (649.5 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 34400500 BOS-400-ASC.pdf (82.1 KB)

Product drawing in DXF format: 34400500 BOS-400-ASC.dxf (762.2 KB)

Product information

bos en.pdf (1.4 MB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Matching accessories



Battery holders

34165572 BH 2MC


For 2 micro batteries (LR03, R03, AM4, E92, AAA), connection with soldering tags



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006190 SHR Z KA25x6

SD = 2.5 / ND = 2.0 / KD = 4.4



Membrane keypad for BOS 400/401, with 6 keys

70344006* FT 40006 D