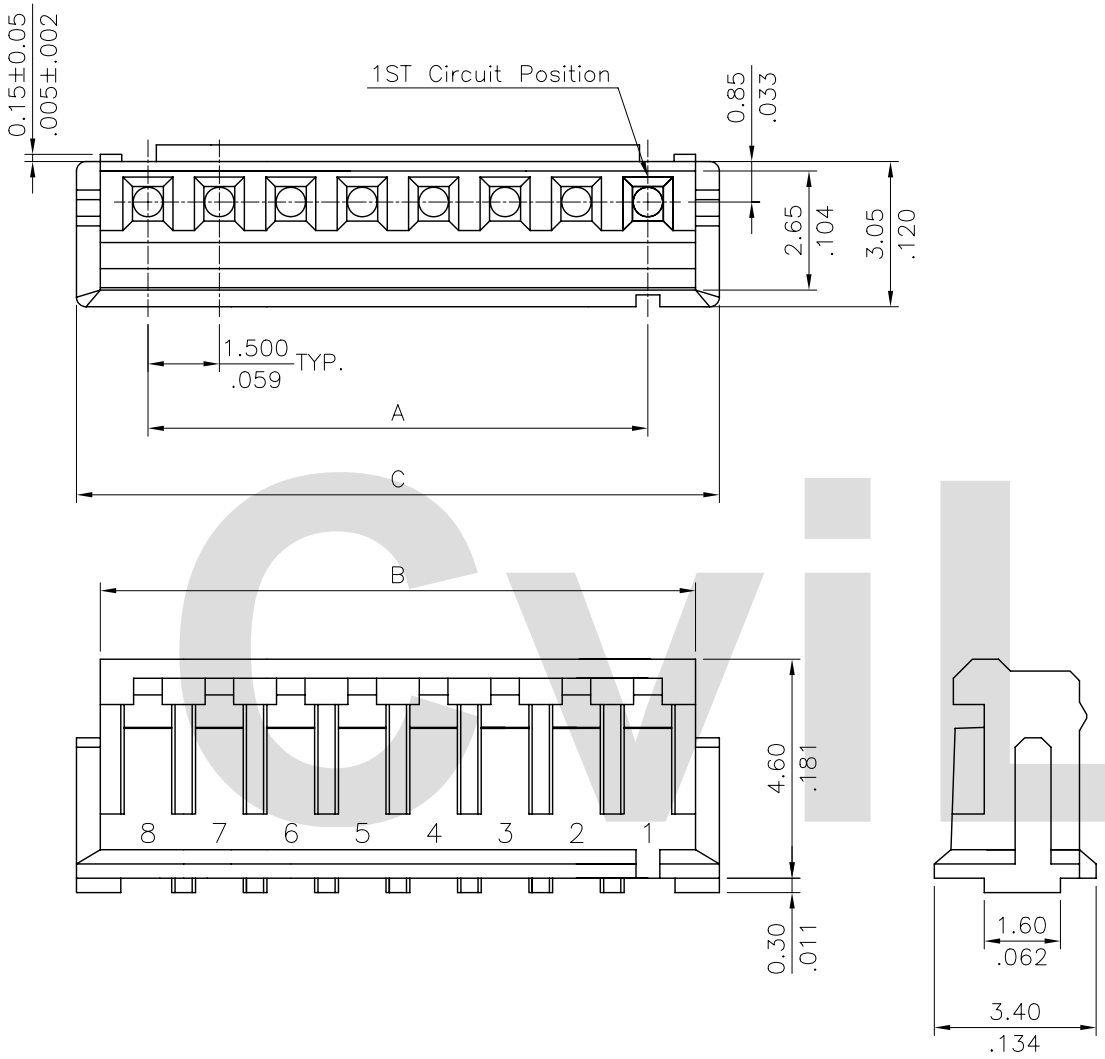

Material: Nylon 66 UL 94V-0

Ordering Code

CI15 ① ** ② S ③ 0000 ④

① Series No.
② No. of Circuits:
③ S= Connector housing
④ Color option: 0000= Nature (Standard)

Circuits	Dimension		
	A	B	C
2	1.50(.059)	3.5(.138)	4.50(.177)
3	3.00(.118)	5.0(.196)	6.00(.236)
4	4.50(.177)	6.5(.255)	7.50(.295)
5	6.00(.236)	8.0(.314)	9.00(.354)
6	7.50(.300)	9.5(.374)	10.50(.413)
7	9.00(.354)	11.0(.433)	12.00(.472)
8	10.50(.413)	12.5(.492)	13.50(.531)
9	12.00(.472)	14.0(.551)	15.00(.591)
10	13.50(.531)	15.5(.610)	16.50(.650)
11	15.00(.590)	17.0(.669)	18.00(.709)
12	16.50(.649)	18.5(.728)	19.50(.768)
13	18.00(.708)	20.0(.787)	21.00(.827)
14	19.50(.767)	21.5(.846)	22.50(.886)
15	21.00(.826)	23.0(.905)	24.00(.945)

Halogen-Free | RoHS Compliant

CVILUX.CORP 2006.12.28 ISSUED

SYM	NAME	DATE	REVISIONS			DATE
4						
3				DRAWN BY:	Hank	12/22-06'
2				ENGINEER:	Eisley	12/22-06'
1				CHECKED BY:	David	12/22-06'
				APPROVED BY:	Alex	12/22-06'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 1.50MM(.024") CRIMP TERMINAL HOUSING

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI1512SA	PART NO.	CI15**S0000
SCALE	6 / 1	SHEET 1 OF 1	