

## XLamp® CMA1306 Pro9™ LED



### PRODUCT DESCRIPTION

The XLamp® High-Current LED Array family is optimized for best-in-class lumen output, efficacy and reliability at high drive currents. XLamp CMA LEDs share the same package design and LES sizes as Cree LED's industry-leading CXA2 Standard Density LEDs, enabling lighting manufacturers to address a range of performance requirements for applications such as track, downlight and outdoor lighting using a single easy-to-use platform. XLamp High-Current LED Arrays are available in 2-step, and 3-step EasyWhite® bins.

Pro9™ version LEDs deliver up to 15% higher efficacy for 90 and 95 color rendering index (CRI) over standard version LEDs without sacrificing color rendering quality. Pro9 LEDs feature the industry's highest operating temperature rating of 105 °C and the same maximum current as the standard versions. In addition, all Pro9 LEDs share the same mechanical and electrical characteristics as the standard versions.

### FEATURES

- 6-mm optical source
- Mechanical and optical design consistent with CXA13 and CXB13 LEDs
- EasyWhite® 2- and 3-step binning
- Premium Color 2- and 3-step binning
- Pro9 LEDs available in 90 and 95 CRI minimum options
- Forward voltage options: 9-V class, 18-V class & 36-V class
- 85 °C binning and characterization
- Maximum drive current: 2400 mA (9 V), 1200 mA (18 V), 600 mA (36 V)
- 116° viewing angle, uniform chromaticity profile
- Top-side solder connections
- RoHS and REACH compliant
- UL® recognized component (E349212)



Cree LED / 4001 E. Hwy. 54, Suite 2000 / Durham, NC 27709 USA / +1.919.313.5330 / [www.cree-led.com](http://www.cree-led.com)

**TABLE OF CONTENTS**

---

Characteristics ..... 3

Operating Limits..... 4

Operating Limits - Continued..... 5

Flux Characteristics, EasyWhite® Order Codes and Bins - 9 V ..... 6

Flux Characteristics, Premium Order Codes and Bins - 9 V ..... 6

Flux Characteristics, EasyWhite® Order Codes and Bins - 18 V ..... 7

Flux Characteristics, Premium Order Codes and Bins - 18 V ..... 7

Flux Characteristics, EasyWhite® Order Codes and Bins - 36 V ..... 8

Flux Characteristics, Premium Order Codes and Bins - 36 V ..... 8

Relative Spectral Power Distribution, EasyWhite® LEDs..... 9

Relative Spectral Power Distribution, Premium Color LEDs..... 10

Electrical Characteristics..... 11

Relative Luminous Flux..... 13

Typical Spatial Distribution..... 15

EasyWhite® Performance Groups - Chromaticity..... 16

Premium Color Performance Groups - Chromaticity..... 17

EasyWhite® Bins Plotted on the 1931 CIE Color Space..... 18

Premium Color Bins Plotted on the 1931 CIE Color Space..... 19

Bin and Order Code Formats..... 20

Mechanical Dimensions ..... 21

Thermal Design ..... 22

Notes ..... 24

Packaging..... 26

## CHARACTERISTICS



Characteristics	Unit	Minimum	Typical	Maximum
Viewing angle (FWHM)	degrees		116	
ESD withstand voltage (JEDEC JS-001-2012)	V		Class 3A	
DC forward current (9 V)	mA			2400*
DC forward current (18 V)	mA			1200*
DC forward current (36 V)	mA			600*
Reverse current	mA			0.1
Forward voltage (9 V, 800 mA, 85 °C)	V		9	10.75
Forward voltage (18V, 400 mA, 85 °C)	V		18	21.5
Forward voltage (36 V, 200 mA, 85 °C)	V		36	43

\* Refer to the Operating Limits section.


## OPERATING LIMITS

The maximum current rating of the CMA1306 Pro9 LED depends on the case temperature ( $T_c$ ) when the LED has reached thermal equilibrium under steady-state operation. The graphs shown below assume that the system design employs good thermal management (thermal interface material and heat sink) and may vary when poor thermal management is employed. Either solder pad shown in the Mechanical Dimensions section on page 21 can be used as the  $T_c$  measurement point.

Another important factor in good thermal management is the temperature of the Light Emitting Surface (LES). Cree LED recommends a maximum LES temperature of 140 °C to ensure optimal LED lifetime. Please refer to the Thermal Design section on page 22 for more information on LES temperature measurement.

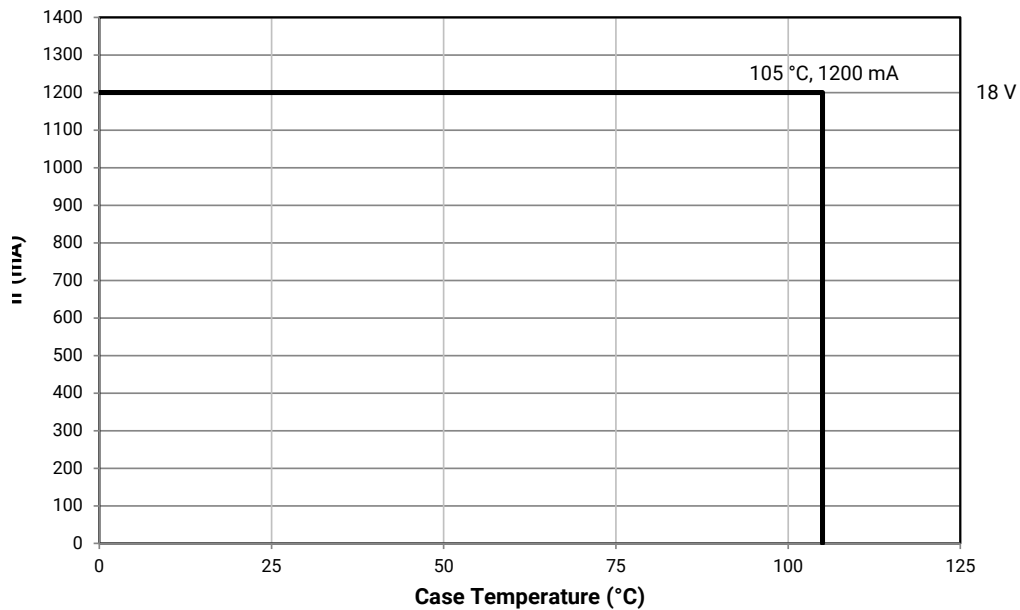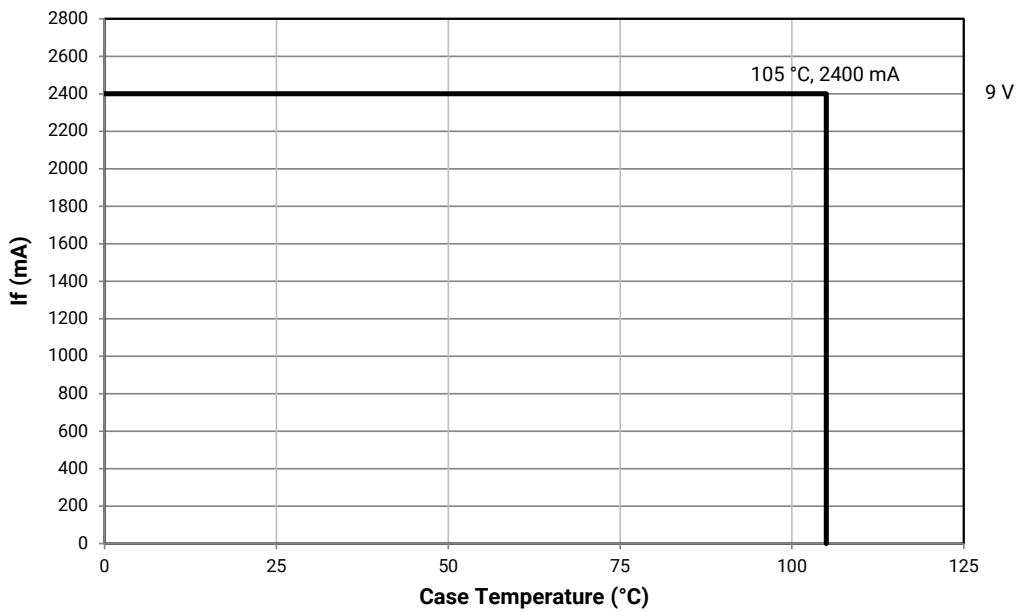

OPERATING LIMITS - CONTINUED

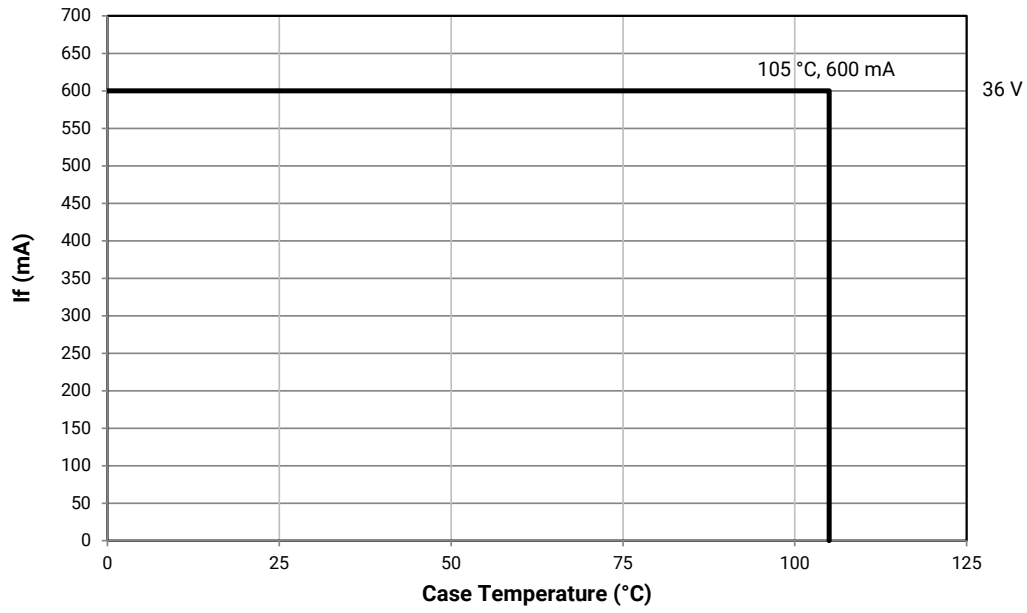

## FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 9 V ( $I_F = 800 \text{ mA}$ , $T_J = 85 \text{ °C}$ )

The following tables provide order codes for XLamp CMA1306 Pro9 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 20).

Nominal CCT	CRI*		Minimum Luminous Flux (lm)	Typical Luminous Flux (lm)	2-Step		3-Step	
	Min.	Typ			Group	Order Code	Group	Order Code
5000 K	90	92	934	1005			50G	CMA1306-0000-00PC0U0A50G
4000 K	90	92	935	1036	40H	CMA1306-0000-00PC0U0A40H	40G	CMA1306-0000-00PC0U0A40G
	95	98	867	932	40H	CMA1306-0000-00PC0Z0A40H		
3500 K	90	92	928	997	35H	CMA1306-0000-00PC0U0A35H	35G	CMA1306-0000-00PC0U0A35G
	95	98	835	898	35H	CMA1306-0000-00PC0Z0A35H		
3000 K	90	92	895	985	30H	CMA1306-0000-00PC0U0A30H	30G	CMA1306-0000-00PC0U0A30G
	95	98	806	867	30H	CMA1306-0000-00PC0Z0A30H		
2700 K	90	92	863	928	27H	CMA1306-0000-00PC0U0A27H	27G	CMA1306-0000-00PC0U0A27G
	95	98	777	835	27H	CMA1306-0000-00PC0Z0A27H		

## FLUX CHARACTERISTICS, PREMIUM ORDER CODES AND BINS - 9 V ( $I_F = 800 \text{ mA}$ , $T_J = 85 \text{ °C}$ )

### Specialty

Nominal CCT	CRI		Minimum Luminous Flux (lm)	Typical Luminous Flux (lm)	2-Step		3-Step			
	Min.	Typ			Group	Order Code	Group	Order Code	Group	Order Code
3100 K	90	92	895	985			31Q	CMA1306-0000-00PC0U0A31Q		
3000 K	90	92	871	956					30U	CMA1306-0000-00PC0U0A30U
	90	92	880	966			30Q	CMA1306-0000-00PC0U0A30Q		
	95	98	766	824	L7C	CMA1306-0000-00PC0Z0AL7C				

### Notes

- Cree LED maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 24).
- For 90 CRI minimum LEDs, CRI R9 typical is 60.

## FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 18 V ( $I_F = 400 \text{ mA}$ , $T_J = 85 \text{ °C}$ )

The following tables provide order codes for XLamp CMA1306 Pro9 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 20).

Nominal CCT	CRI*		Minimum Luminous Flux (lm)	Typical Luminous Flux (lm)	2-Step		3-Step	
	Min.	Typ			Group	Order Code	Group	Order Code
5000 K	90	92	934	1005			50G	CMA1306-0000-00PF0U0A50G
4000 K	90	92	935	1036	40H	CMA1306-0000-00PF0U0A40H	40G	CMA1306-0000-00PF0U0A40G
	95	98	867	932	40H	CMA1306-0000-00PF0Z0A40H		
3500 K	90	92	928	997	35H	CMA1306-0000-00PF0U0A35H	35G	CMA1306-0000-00PF0U0A35G
	95	98	835	898	35H	CMA1306-0000-00PF0Z0A35H		
3000 K	90	92	895	985	30H	CMA1306-0000-00PF0U0A30H	30G	CMA1306-0000-00PF0U0A30G
	95	98	806	867	30H	CMA1306-0000-00PF0Z0A30H		
2700 K	90	92	863	928	27H	CMA1306-0000-00PF0U0A27H	27G	CMA1306-0000-00PF0U0A27G
	95	98	777	835	27H	CMA1306-0000-00PF0Z0A27H		

## FLUX CHARACTERISTICS, PREMIUM ORDER CODES AND BINS - 18 V ( $I_F = 400 \text{ mA}$ , $T_J = 85 \text{ °C}$ )

### Specialty

Nominal CCT	CRI		Minimum Luminous Flux (lm)	Typical Luminous Flux (lm)	2-Step		3-Step			
	Min.	Typ			Group	Order Code	Group	Order Code	Group	Order Code
3100 K	90	92	895	985			31Q	CMA1306-0000-00PF0U0A31Q		
3000 K	90	92	871	956					30U	CMA1306-0000-00PF0U0A30U
	90	92	880	966			30Q	CMA1306-0000-00PF0U0A30Q		
	95	98	766	824	L7C	CMA1306-0000-00PF0Z0AL7C				

### Notes

- Cree LED maintains a tolerance of  $\pm 7\%$  on flux and power measurements,  $\pm 0.005$  on chromaticity (CCx, CCy) measurements and a tolerance of  $\pm 2$  on CRI measurements. See the Measurements section (page 24).
- For 90 CRI minimum LEDs, CRI R9 typical is 60.

**FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 36 V (I<sub>F</sub> = 200 mA, T<sub>J</sub> = 85 °C)**

The following tables provide order codes for XLamp CMA1306 Pro9 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 20).

Nominal CCT	CRI*		Minimum Luminous Flux (lm)	Typical Luminous Flux (lm)	2-Step		3-Step	
	Min.	Typ			Group	Order Code	Group	Order Code
5000 K	90	92	934	1005			50G	CMA1306-0000-00PN0U0A50G
4000 K	90	92	935	1036	40H	CMA1306-0000-00PN0U0A40H	40G	CMA1306-0000-00PN0U0A40G
	95	98	867	932	40H	CMA1306-0000-00PN0Z0A40H		
3500 K	90	92	928	997	35H	CMA1306-0000-00PN0U0A35H	35G	CMA1306-0000-00PN0U0A35G
	95	98	835	898	35H	CMA1306-0000-00PN0Z0A35H		
3000 K	90	92	895	985	30H	CMA1306-0000-00PN0U0A30H	30G	CMA1306-0000-00PN0U0A30G
	95	98	806	867	30H	CMA1306-0000-00PN0Z0A30H		
2700 K	90	92	863	928	27H	CMA1306-0000-00PN0U0A27H	27G	CMA1306-0000-00PN0U0A27G
	95	98	777	835	27H	CMA1306-0000-00PN0Z0A27H		

**FLUX CHARACTERISTICS, PREMIUM ORDER CODES AND BINS - 36 V (I<sub>F</sub> = 200 mA, T<sub>J</sub> = 85 °C)**

**Specialty**



Nominal CCT	CRI		Minimum Luminous Flux (lm)	Typical Luminous Flux (lm)	2-Step		3-Step			
	Min.	Typ			Group	Order Code	Group	Order Code	Group	Order Code
3100 K	90	92	895	985			31Q	CMA1306-0000-00PN0U0A31Q		
3000 K	90	92	871	956					30U	CMA1306-0000-00PN0U0A30U
	90	92	880	966			30Q	CMA1306-0000-00PN0U0A30Q		
	95	98	766	824	L7C	CMA1306-0000-00PN0Z0AL7C				

- Notes
- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
  - For 90 CRI minimum LEDs, CRI R9 typical is 60.



## RELATIVE SPECTRAL POWER DISTRIBUTION, EASYWHITE® LEDS


The following graphs are the result of a series of pulsed measurements at 800 mA for the 9-V CMA1306 Pro9 LED, 400 mA for the 18-V CMA1306 Pro9 LED, and at 200 mA for the 36-V CMA1306 Pro9 LED and  $T_j = 85\text{ }^\circ\text{C}$ .

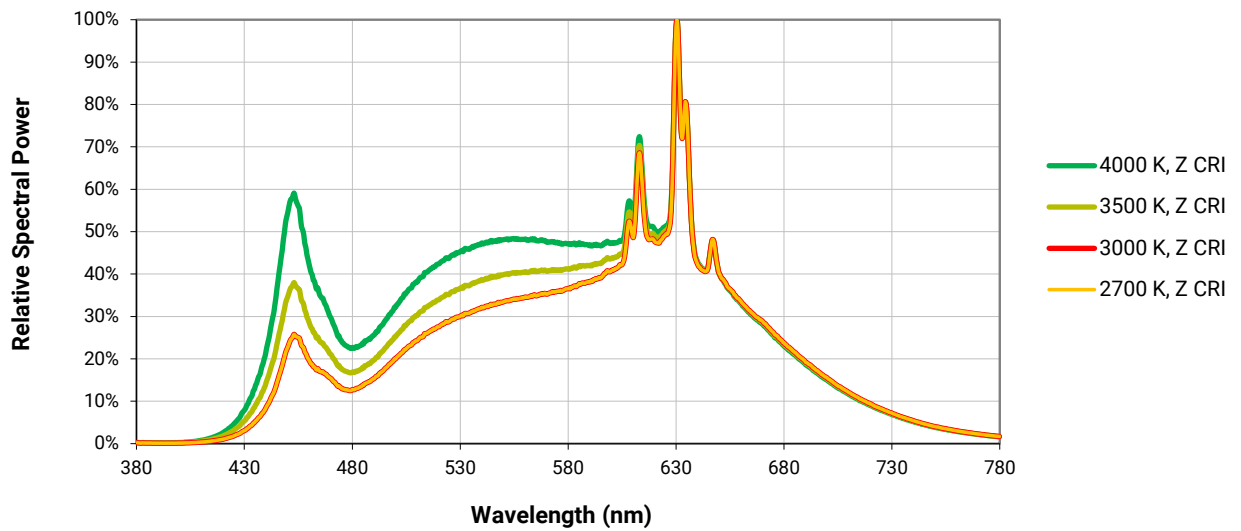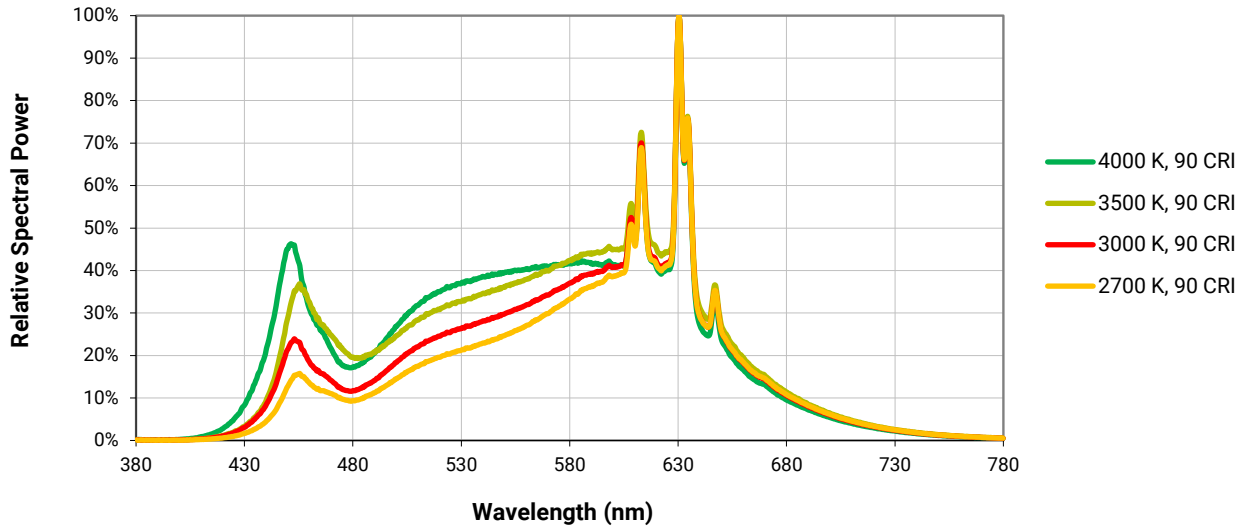

RELATIVE SPECTRAL POWER DISTRIBUTION, PREMIUM COLOR LEDS



The following graph is the result of a series of pulsed measurements at 800 mA for the 9-V CMA1306 Pro9 LED, 400 mA for the 18-V CMA1306 Pro9 LED, and at 200 mA for the 36-V CMA1306 Pro9 LED and  $T_j = 85\text{ }^\circ\text{C}$ .

Specialty

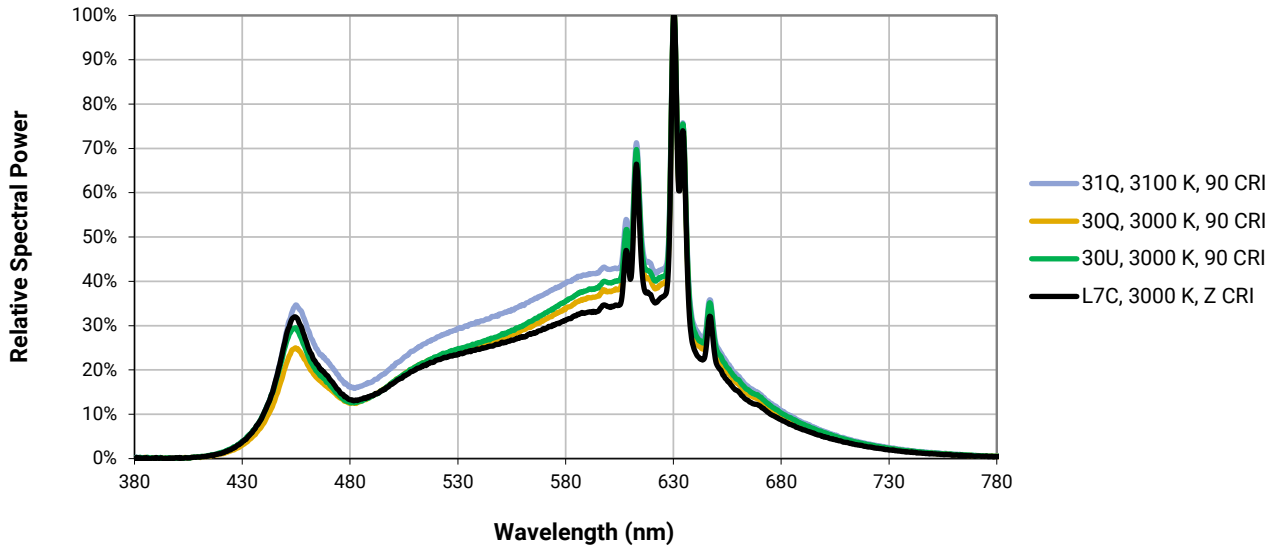


## ELECTRICAL CHARACTERISTICS

The following graphs are the result of a series of steady-state measurements.

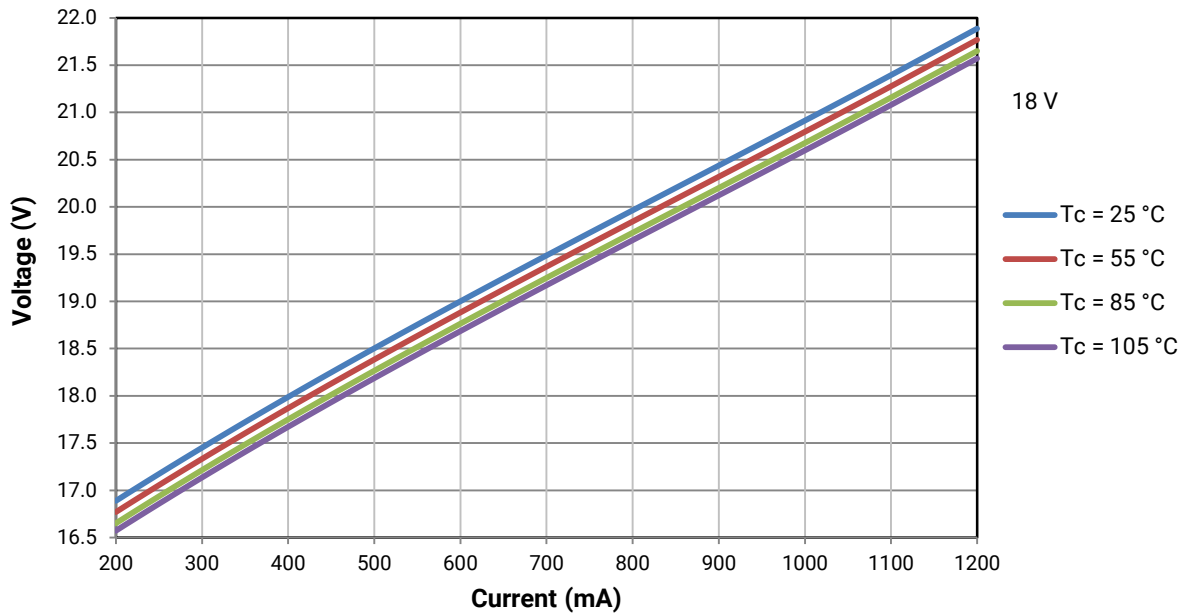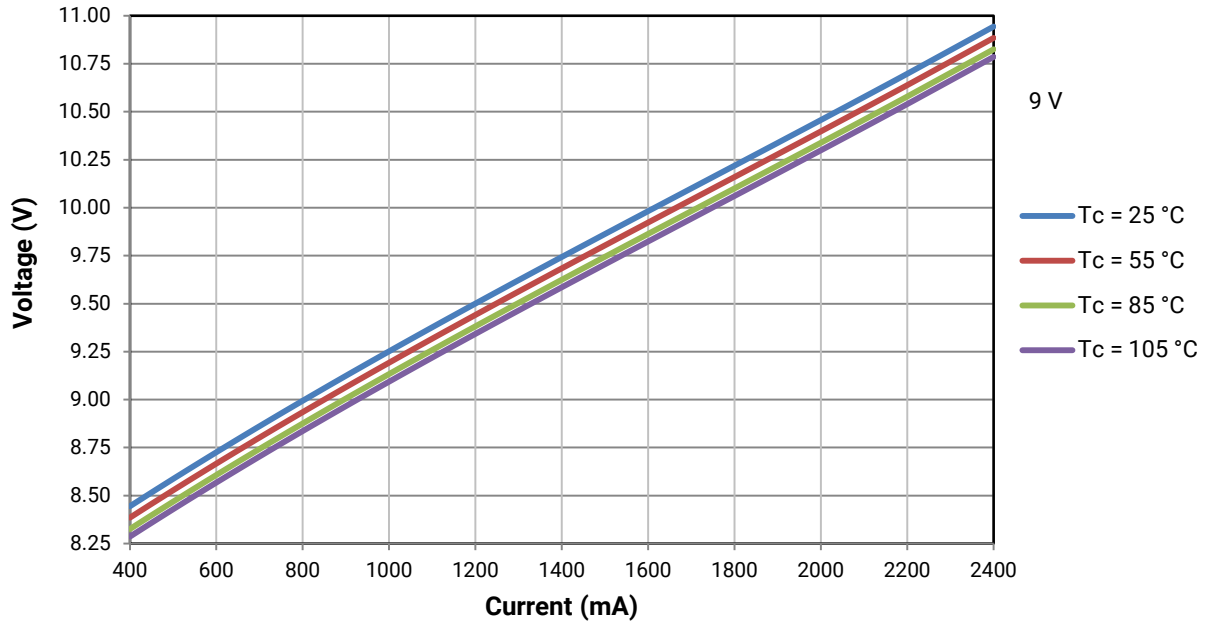

ELECTRICAL CHARACTERISTICS - CONTINUED

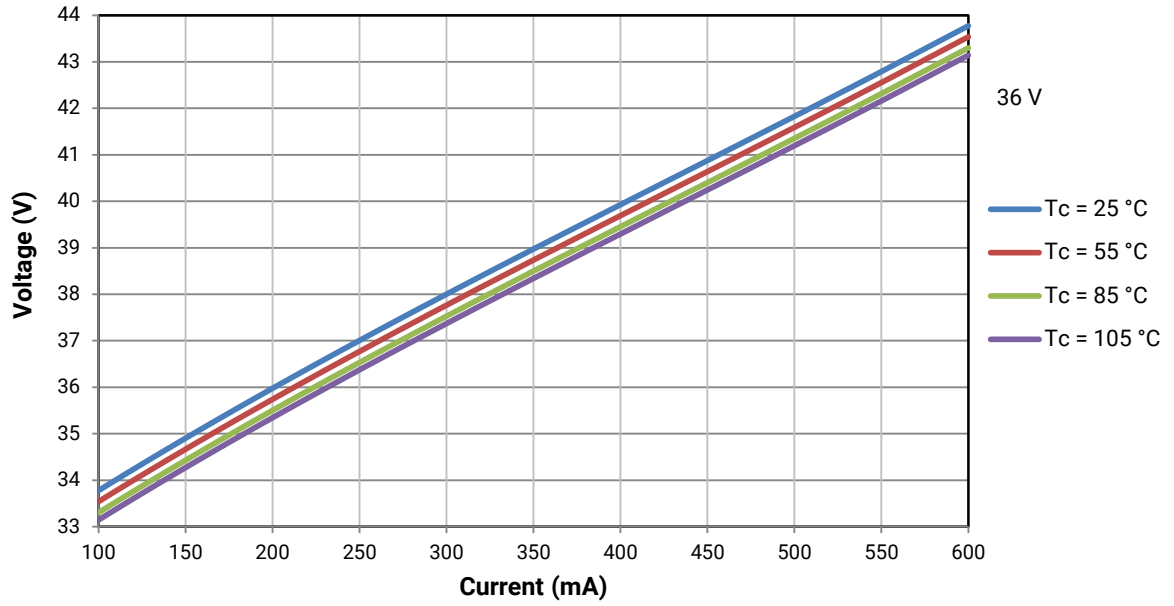


## RELATIVE LUMINOUS FLUX

The relative luminous flux values provided below are the ratio of:

- Measurements of the CMA1306 Pro9 LED at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 800 mA at  $T_j = 85\text{ }^\circ\text{C}$  for the 9-V CMA1306 Pro9 LED.

Using the 9-V CMA1306 Pro9 LED as an example,, at steady-state operation of  $T_c = 25\text{ }^\circ\text{C}$ ,  $I_f = 2000\text{ mA}$ , the relative luminous flux ratio is 225% in the chart below. A 9-V CMA1306 Pro9 LED that measures 1005 lm during binning will deliver 2261 lm ( $1005 \times 2.25$ ) at steady-state operation of  $T_c = 25\text{ }^\circ\text{C}$ ,  $I_f = 2000\text{ mA}$ .

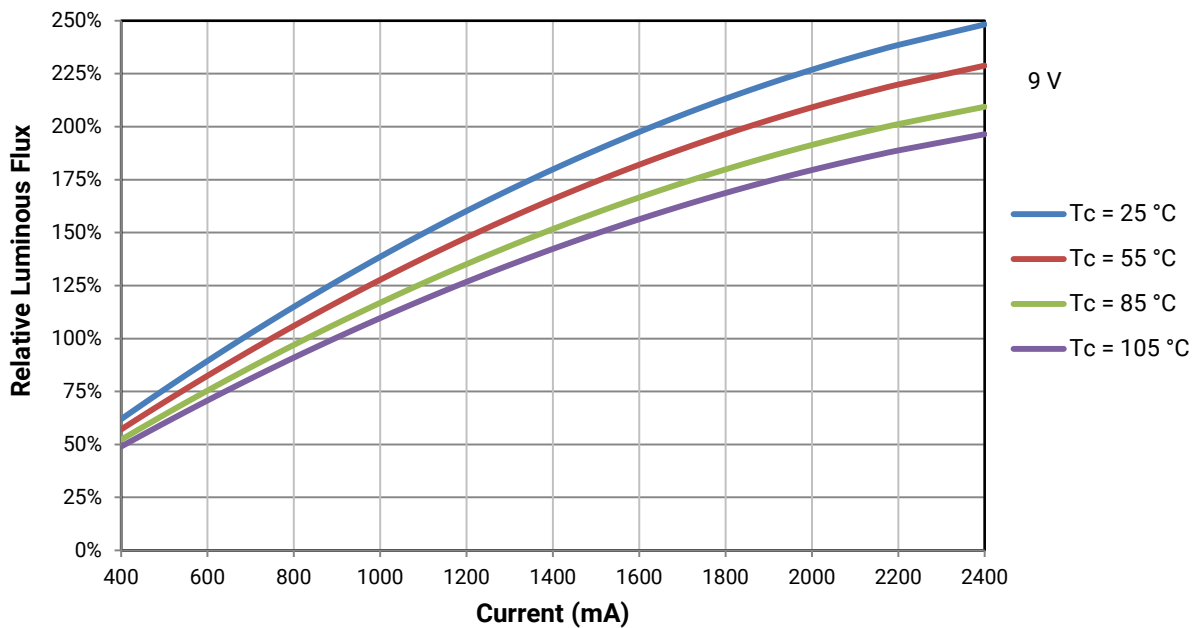


## RELATIVE LUMINOUS FLUX - CONTINUED

The relative luminous flux values provided below are the ratio of:

- Measurements of the CMA1306 Pro9 LED at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 400 mA at  $T_j = 85\text{ }^\circ\text{C}$  for the 18-V CMA1306 Pro9 LED.

Using the 18-V CMA1306 Pro9 LED as an example,, at steady-state operation of  $T_c = 25\text{ }^\circ\text{C}$ ,  $I_f = 1000\text{ mA}$ , the relative luminous flux ratio is 225% in the chart below. An 18-V CMA1306 Pro9 LED that measures 1005 lm during binning will deliver 2261 lm ( $1005 * 2.25$ ) at steady-state operation of  $T_c = 25\text{ }^\circ\text{C}$ ,  $I_f = 1000\text{ mA}$ .

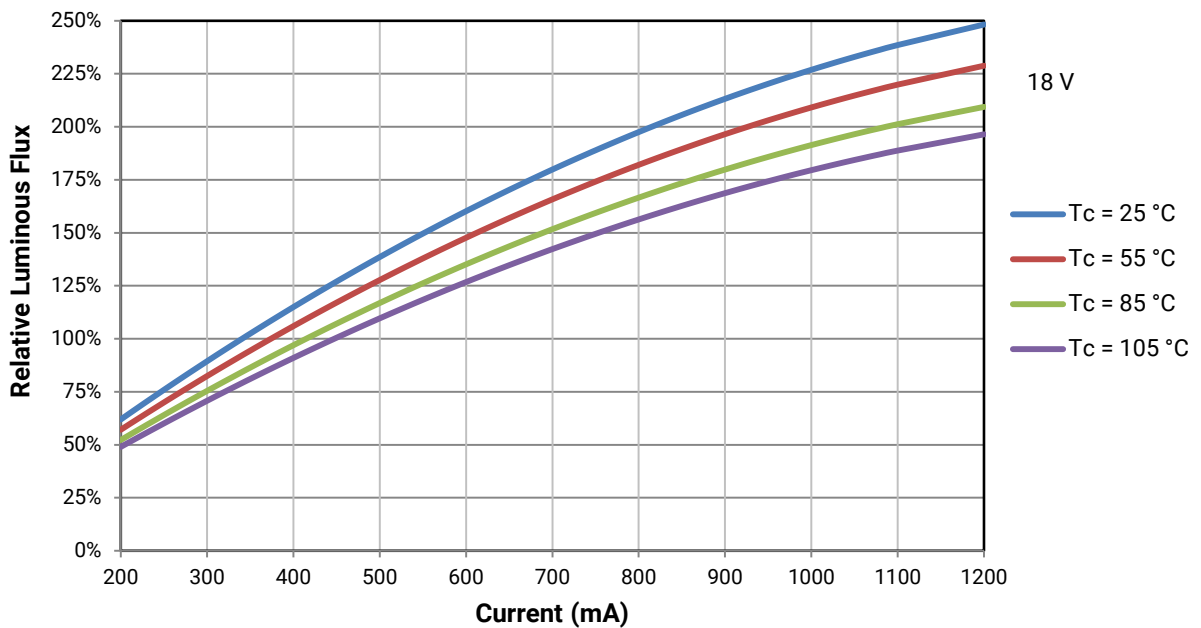


## RELATIVE LUMINOUS FLUX - CONTINUED


The relative luminous flux values provided below are the ratio of:

- Measurements of the CMA1306 Pro9 LED at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 200 mA at  $T_j = 85\text{ °C}$  for the 36-V CMA1306 Pro9 LED.

Using the 36-V CMA1306 Pro9 LED as an example,, at steady-state operation of  $T_c = 25\text{ °C}$ ,  $I_f = 500\text{ mA}$ , the relative luminous flux ratio is 225% in the chart below. A 36-V CMA1306 Pro9 LED that measures 1005 lm during binning will deliver 2261 lm ( $1005 \times 2.25$ ) at steady-state operation of  $T_c = 25\text{ °C}$ ,  $I_f = 500\text{ mA}$ .

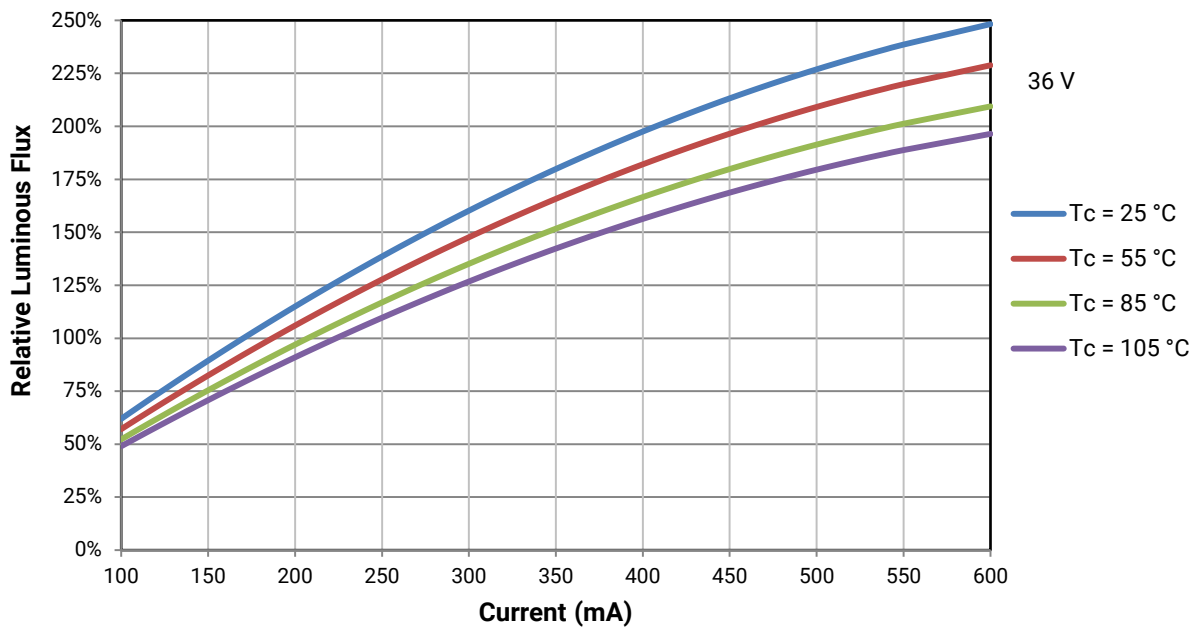

## TYPICAL SPATIAL DISTRIBUTION

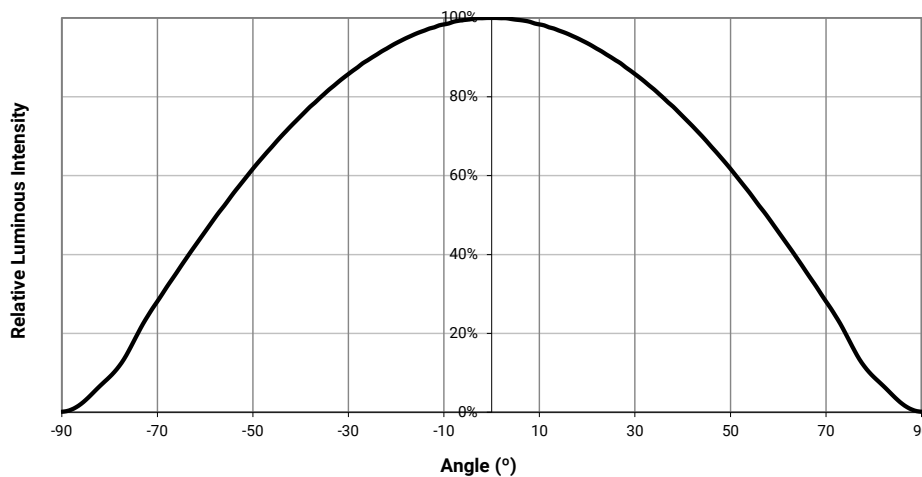

## EASYWHITE® PERFORMANCE GROUPS - CHROMATICITY ( $T_j = 85\text{ °C}$ )

XLamp CMA1306 Pro9 LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

EasyWhite Color Temperatures – 2-Step			
Code	CCT	x	y
40H	4000 K	0.3777	0.3739
		0.3797	0.3816
		0.3861	0.3855
		0.3838	0.3777
35H	3500 K	0.4022	0.3858
		0.4053	0.3942
		0.4125	0.3977
		0.4091	0.3891
30H	3000 K	0.4287	0.3975
		0.4328	0.4064
		0.4390	0.4086
		0.4347	0.3996
27H	2700 K	0.4524	0.4048
		0.4574	0.4140
		0.4633	0.4154
		0.4581	0.4062

EasyWhite Color Temperatures – 3-Step Ellipse						
Bin Code	CCT	Center Point		Major Axis	Minor Axis	Rotation Angle (°)
		x	y	a	b	
57G	5700 K	0.3287	0.3417	0.00738	0.00360	72.0
50G	5000 K	0.3447	0.3553	0.00840	0.00312	65.0
40G	4000 K	0.3818	0.3797	0.00939	0.00402	53.7
35G	3500 K	0.4073	0.3917	0.00927	0.00414	54.0
30G	3000 K	0.4338	0.4030	0.00834	0.00408	53.2
27G	2700 K	0.4577	0.4099	0.00834	0.00420	48.5



## PREMIUM COLOR PERFORMANCE GROUPS - CHROMATICITY ( $T_j = 85\text{ }^\circ\text{C}$ )


XLamp CMA1306 Pro9 LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

### Specialty

EasyWhite Color Temperatures – 2-Step			
Code	CCT	x	y
L7C	3000 K	0.4192	0.3754
		0.4224	0.3823
		0.4291	0.3847
		0.4257	0.3777


EasyWhite Color Temperatures – 3-Step Ellipse						
Bin Code	CCT	Center Point		Major Axis	Minor Axis	Rotation Angle (°)
		x	y	a	b	
31Q	3100 K	0.4236	0.3888	0.00848	0.00455	50.3
30Q	3000 K	0.4305	0.3935	0.00834	0.00408	53.2
30U	3000 K	0.4274	0.3837	0.00834	0.00408	53.2

EASYWHITE® BINS PLOTTED ON THE 1931 CIE COLOR SPACE ( $T_j = 85^\circ\text{C}$ )

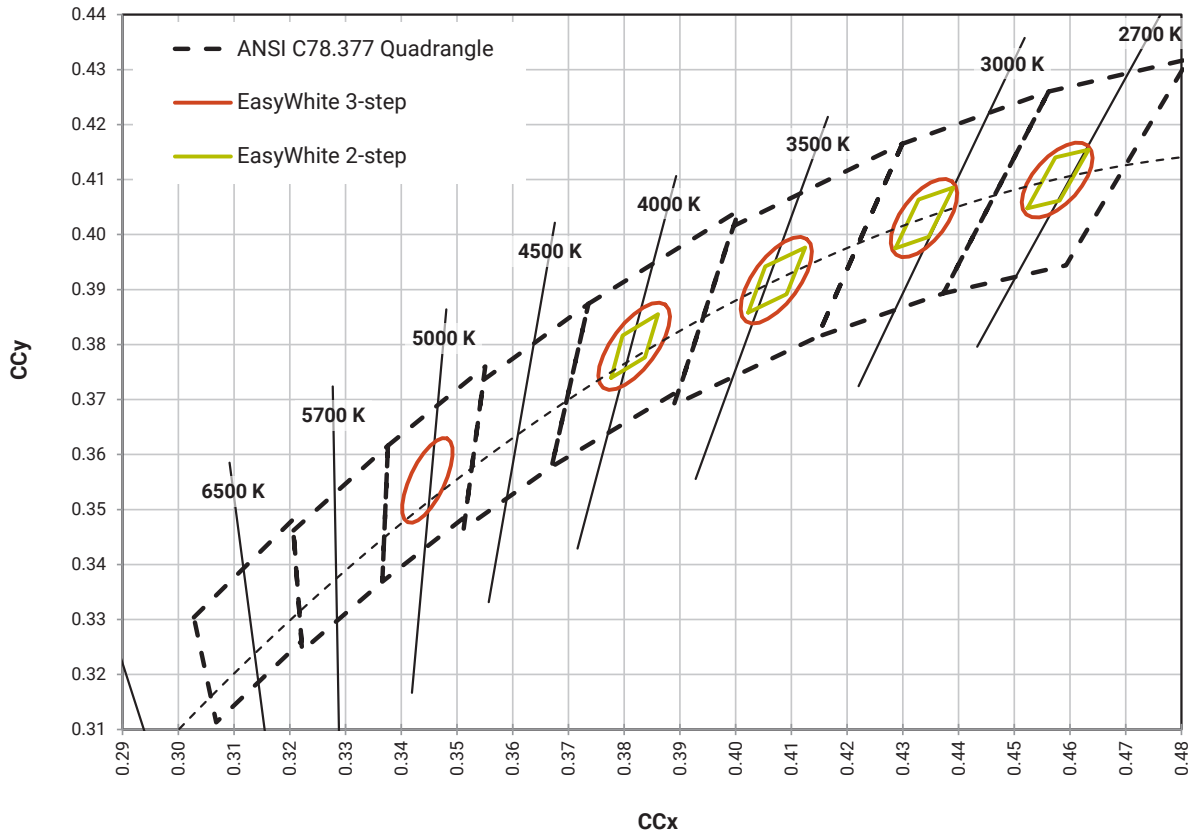


PREMIUM COLOR BINS PLOTTED ON THE 1931 CIE COLOR SPACE ( $T_j = 85^\circ\text{C}$ )

Specialty (2-step)

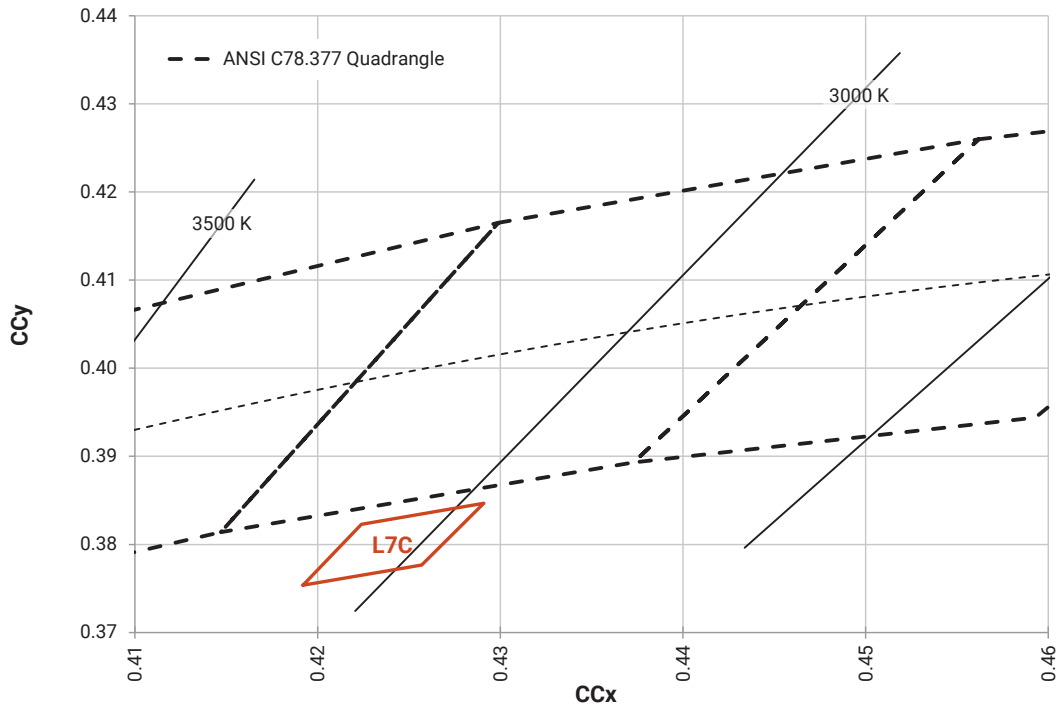


Specialty (3-step)

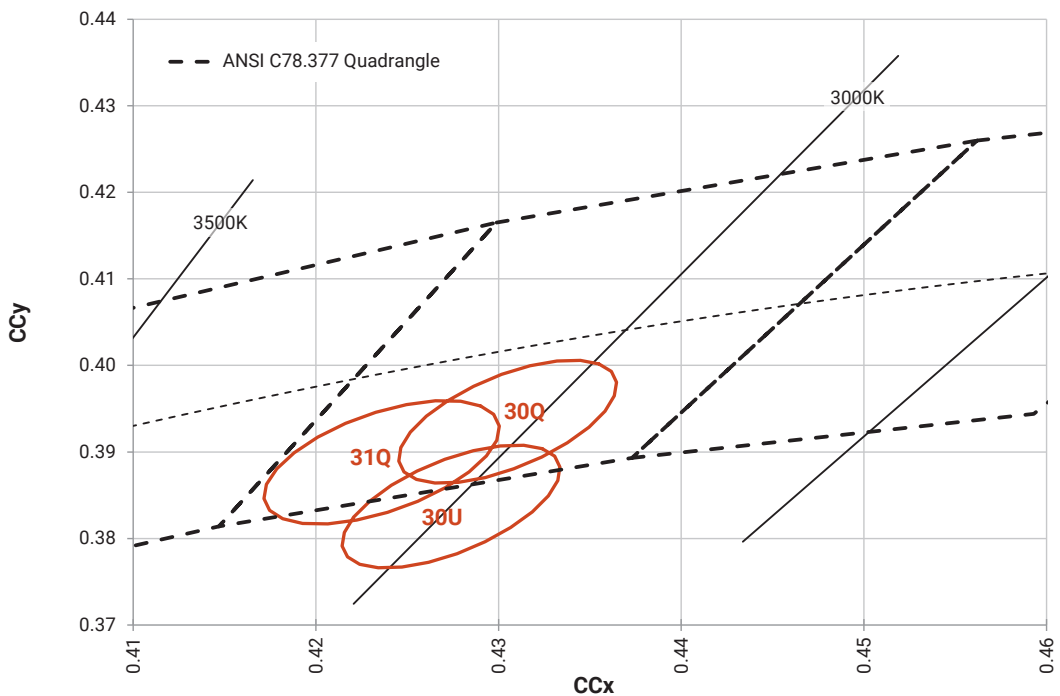

## BIN AND ORDER CODE FORMATS

Bin codes and order codes are configured as follows:

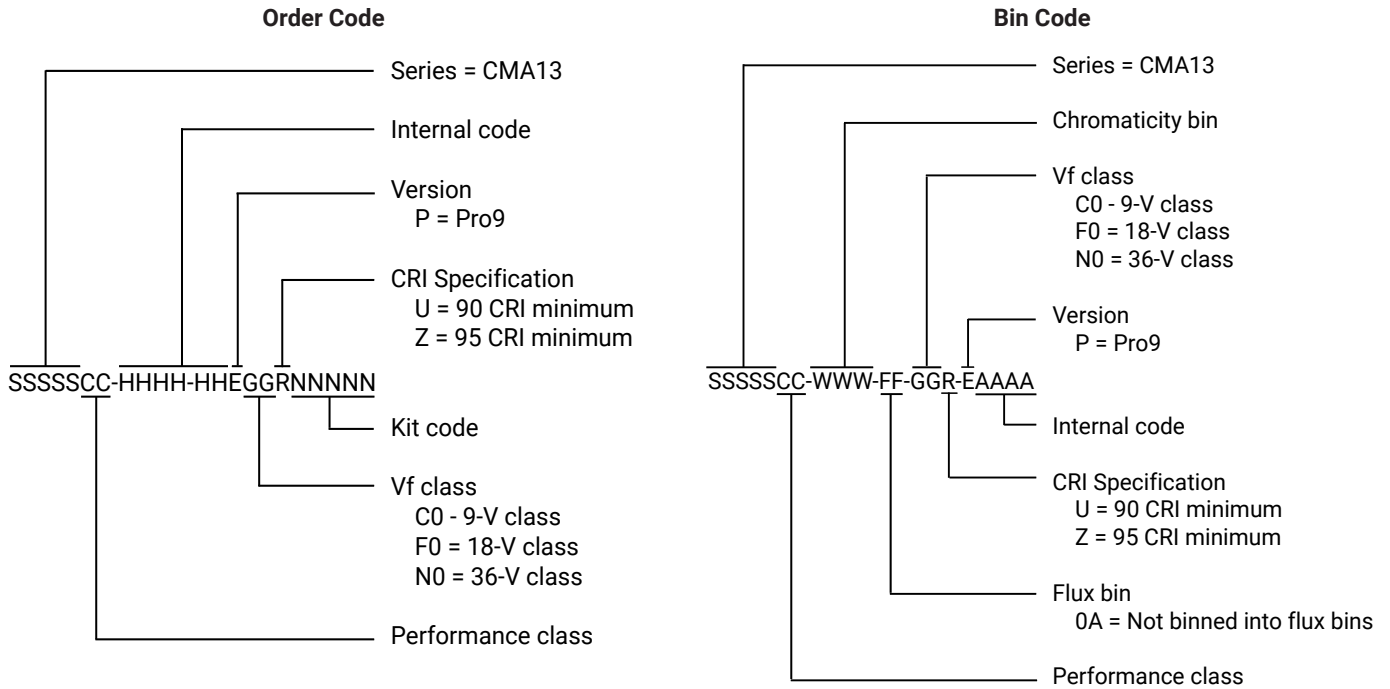

## MECHANICAL DIMENSIONS

Dimensions are in mm.

Tolerances unless otherwise spec


$x^\circ \pm 1^\circ$

### Meaning of LED marking

P-M1306C = 9-V CMA1306 Pro9

P-M1306F = 18-V CMA1306 Pro9

P-M1306N = 36-V CMA1306 Pro9

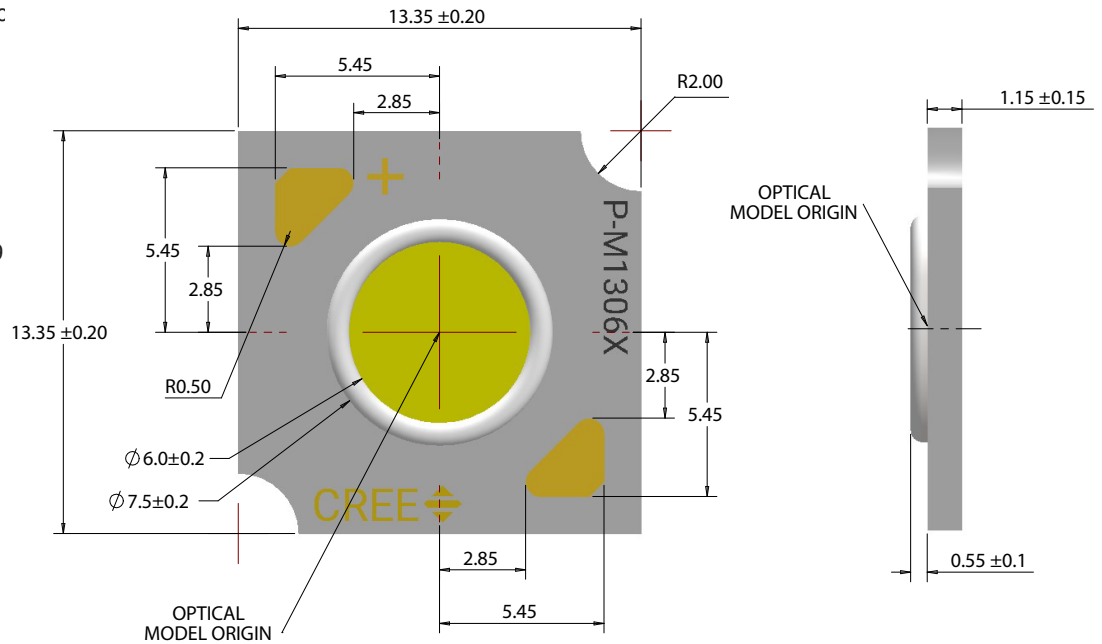

Tc measurement point: either the anode or cathode solder pad



## THERMAL DESIGN

The CMA family of LED arrays can include over a hundred different LED die inside one package, and thus over a hundred different junction temperatures ( $T_j$ ). Cree LED has intentionally removed junction-temperature-based operating limits and replaced the commonplace maximum  $T_j$  calculations with maximum ratings based on forward current ( $I_f$ ) and case temperature ( $T_c$ ). No additional calculations are required to ensure that the CMA LED is being operated within its designed limits. LES temperature measurement provides additional verification of good thermal design. Please refer to page 2 for the Operating Limit specification.



There is no need to calculate for  $T_j$  inside the package, as the thermal management design process, specifically from solder point ( $T_{sp}$ ) to ambient ( $T_a$ ), remains identical to any other LED component. For more information on thermal management of XLamp LEDs, please refer to the [Thermal Management application note](#). For CMA soldering recommendations and more information on thermal interface materials (TIM), LES temperature measurement, and connection methods, please refer to the [XLamp CM Family LEDs soldering and handling document](#).

To keep the CMA1306 Pro9 LED at or below the maximum rated  $T_c$ , the case to ambient temperature thermal resistance ( $R_{c-a}$ ) must be at or below the maximum  $R_{c-a}$  value shown on the following graphs, depending on the operating environment. The y-axis in the graphs is a base 10 logarithmic scale.

As the figure at right shows, the  $R_{c-a}$  value is the sum of the thermal resistance of the TIM ( $R_{tim}$ ) plus the thermal resistance of the heat sink ( $R_{hs}$ ).

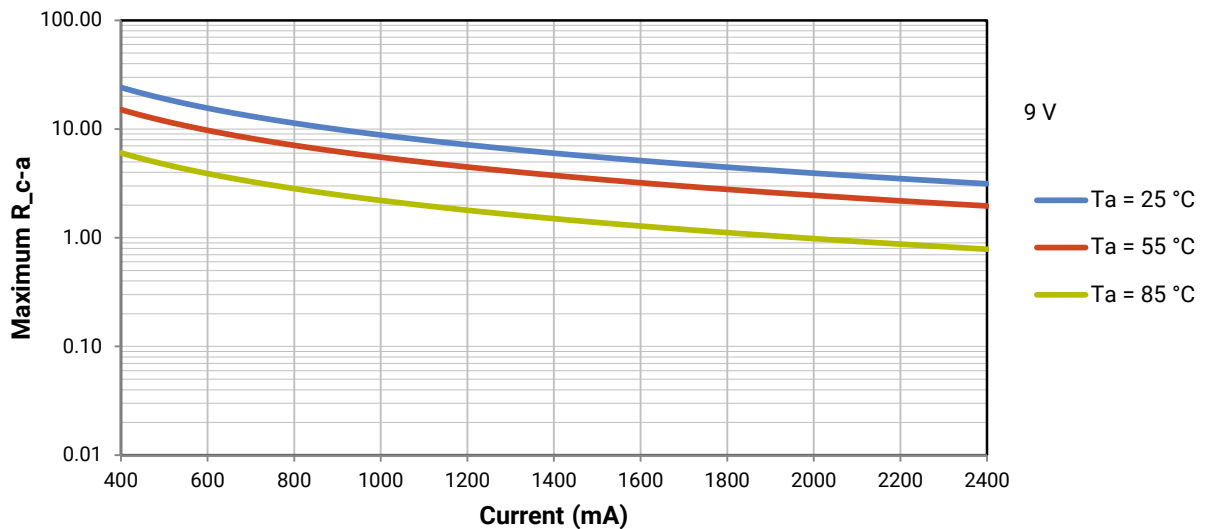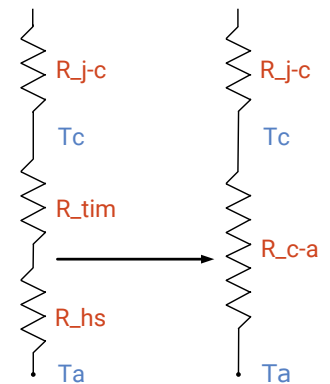

THERMAL DESIGN - CONTINUED

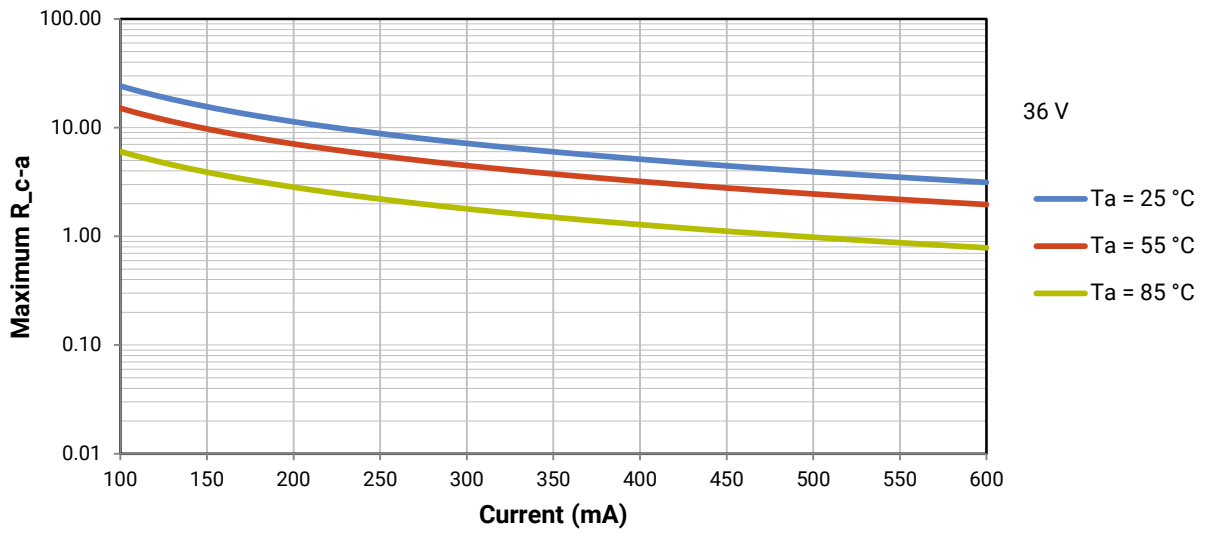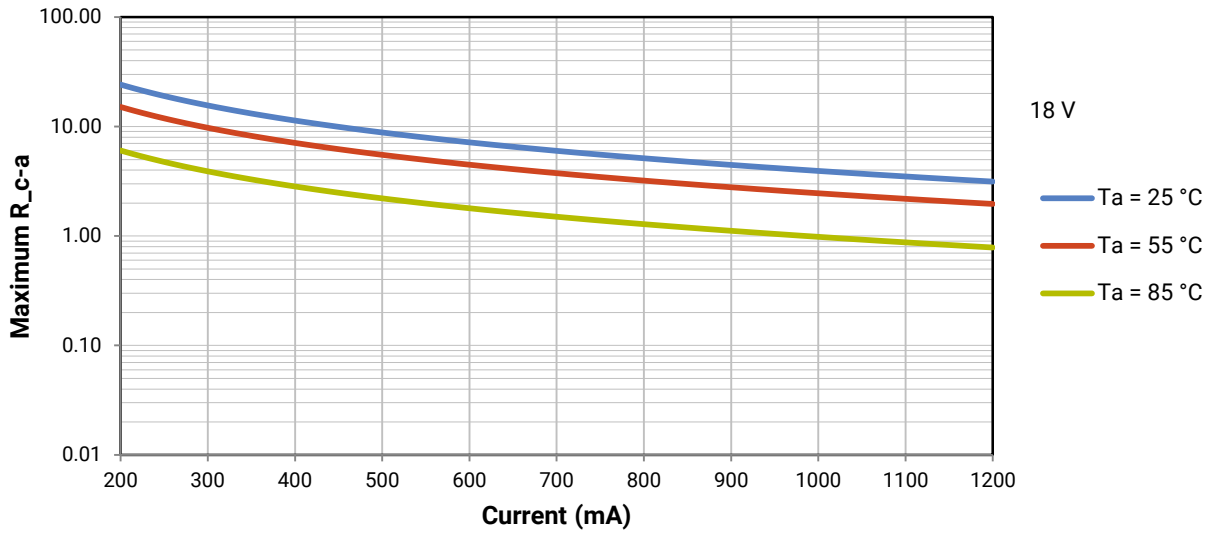

## NOTES

---

### LED Use

Use of this LED in information displays utilizing LCD Backlights and other emissive pixel display technology is prohibited (“Use Restrictions”).

### Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree LED’s control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended or provided as specifications.

### Pre-Release Qualification Testing

Please read the [LED Reliability Overview](#) for details of the qualification process Cree LED applies to ensure long-term reliability for XLamp LEDs and details of Cree LED’s pre-release qualification testing for XLamp LEDs. Cree LED did not perform Room Temperature Operating Life (RTOL) testing on the CMA1306 Pro9 LED.

### Lumen Maintenance

Cree LED now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public [LM-80 results document](#).

Please read the [Long-Term Lumen Maintenance application note](#) for more details on Cree LED’s lumen maintenance testing and forecasting. Please read the [Thermal Management application note](#) for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

### RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree LED representative or from the [Product Ecology](#) section of the Cree LED website.

### REACH Compliance

REACH substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree LED representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

### UL® Recognized Component

This product meets the requirements to be considered a UL Recognized Component with Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.



## NOTES - CONTINUED

---



### Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the [LED Eye Safety application note](#).

**PACKAGING**

Cree LED CMA1306 Pro9 LEDs are packaged in trays of 20. Five trays are sealed in an anti-static bag and placed inside a carton, for a total of 100 LEDs per carton. Each carton contains 100 LEDs from the same performance bin.


Dimensions are in inches.  
Tolerances:  $\pm .13$   
 $x^\circ \pm 1^\circ$

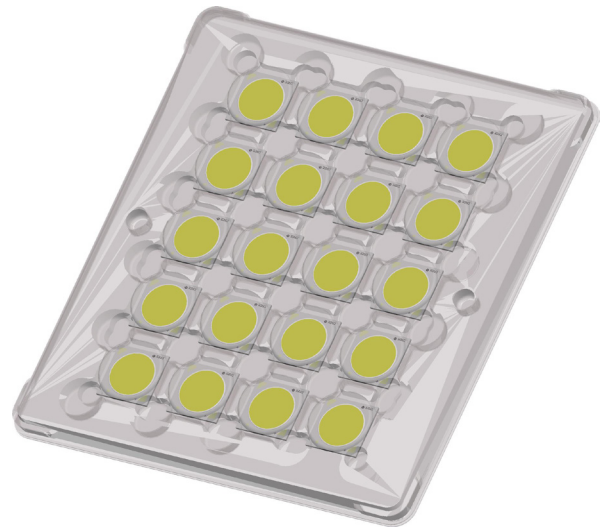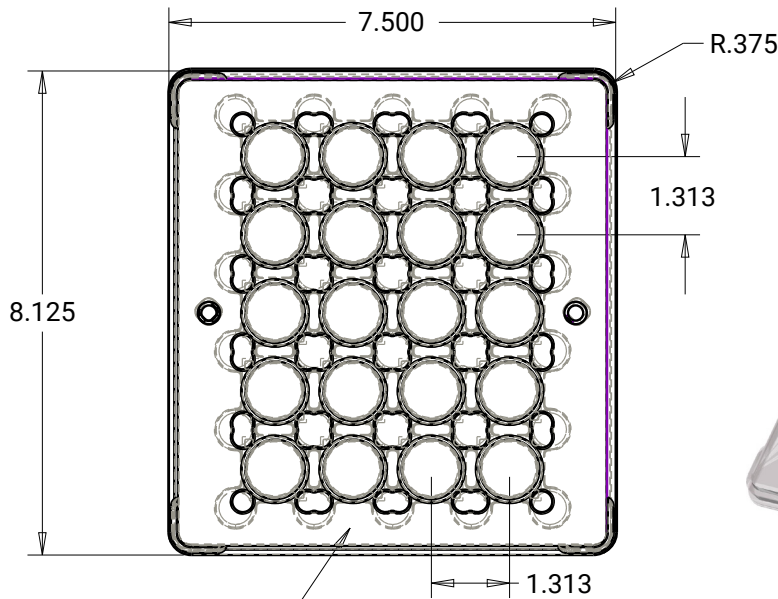

LABEL WITH CREE BIN CODE,  
QUANTITY, LOT #

PATENT LABEL IS LOCATED  
ON UNDERSIDE OF CARTON

LABEL WITH CREE BIN  
CODE, QUANTITY, LOT #

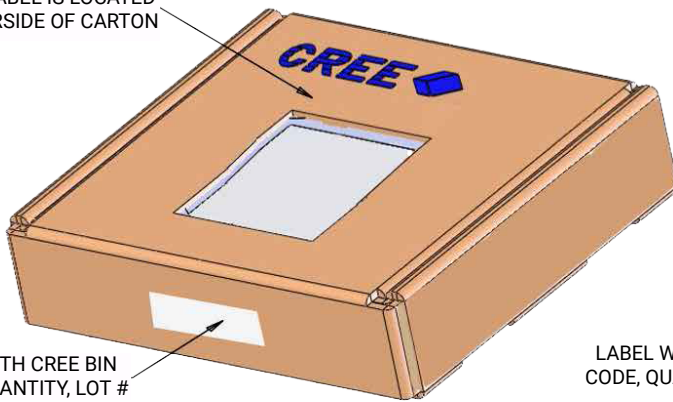

BAG

LABEL WITH CREE BIN  
CODE, QUANTITY, LOT #

