






Specifications

Current Rating: 1A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 250V AC/minute
 Temperature Range: -40°C ~ +105°C



Material

Insulator: P.B.T, UL94V-0
 Contact: Copper Alloy
 Cable: Pitch 0.635mm Flat Cable

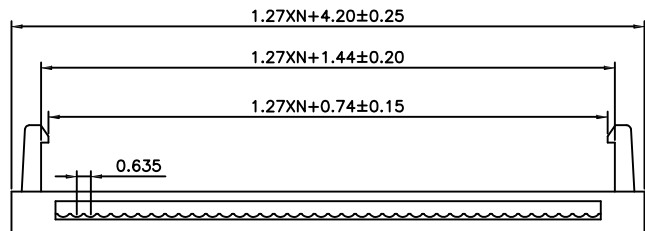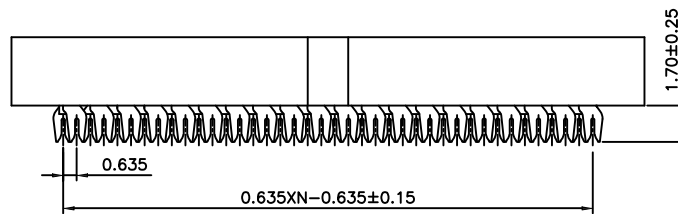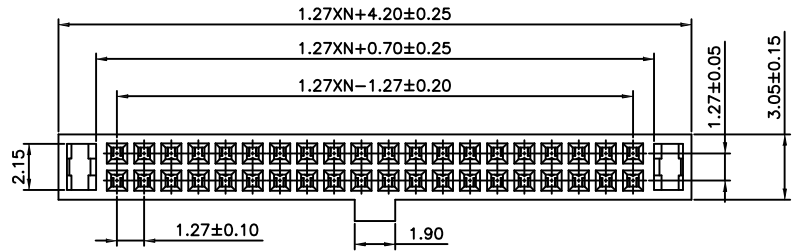

					品號 PART NO.		日期 DATA	2010/05/23		
					圖號 DRAWING NO.		繪圖 DRAWN			
A	Change Selective plating to Gold flash	Apr. 16, 2013			客戶品號 CUSTOMER P/N		核對 APPROVED			
REV.	DESCRIPTION	DATA	TITLE: IDC Socket 1.27mm	REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm