


REVISION RECORD




REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

SR-M12X-XXP-FF-SF7003-00A(H)  
 Coding: A,B,D — Pin number: 04,05,08

8pin A Coding



Pin Assignments Front View

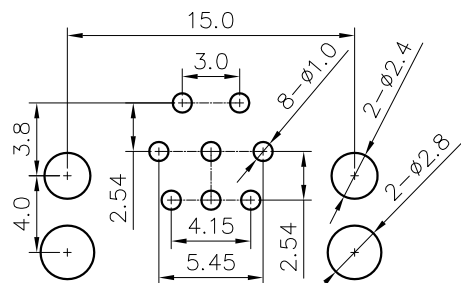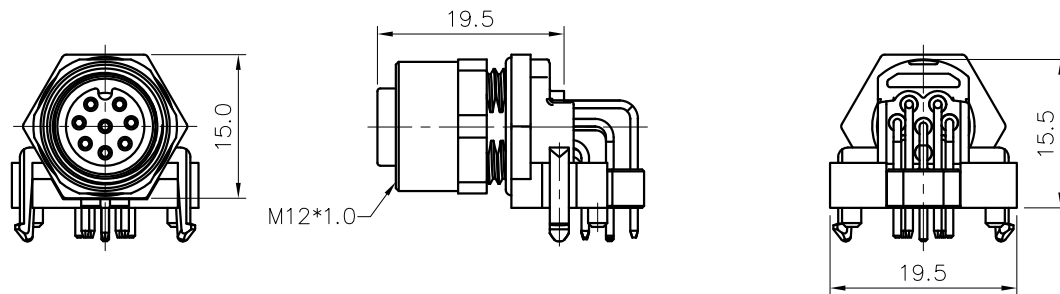


Panel Mounted

NOTES:

- Rated voltage/current : 4pin A: 250V / 4A  
 5pin A: 60V / 4A  
 8pin A: 30V / 2A  
 5pin B: 60V / 4A  
 4pin D: 250V / 4A
- Withstanding voltage : 4pin A: AC1500V/1Min  
 5pin A: AC1120V/1Min  
 8pin A: AC500V/1Min  
 5pin B: AC1120V/1Min  
 4pin D: AC1500V/1Min
- Levels of protection: IP67
- Wire connection mode: soldering (THR)
- Operating temperature: -40°C ~ +105°C
- For Panel Thickness Max: 4.5mm
- RoHS Compliance
- Tolerance :


- .X ±0.25mm
- .XX ±0.1mm
- ∠ ±1°

4pin A Coding




Pin Assignments Front View

4pin D Coding




Pin Assignments Front View

5pin A Coding





Pin Assignments Front View

5pin B Coding



Pin Assignments Front View

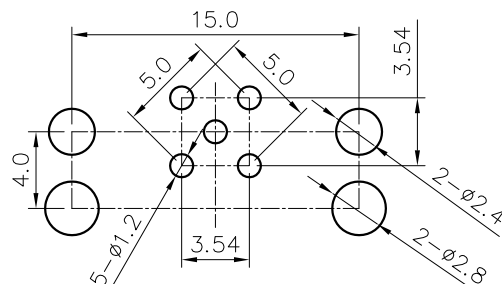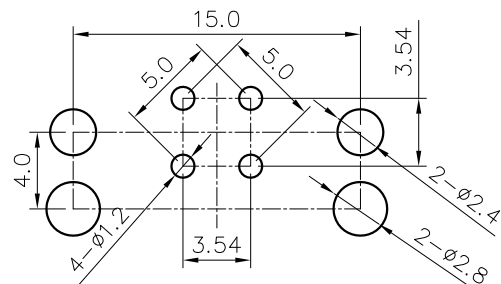

DETACHED LISTS	PART NO.: SRM12XXXPF700300AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SR-M12X-XXP-FF-SF7003-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.10.15	REV: D0-2	SHEET: 1/1	
 THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SCALE: 1:1	
		MM (INCH)	DO NOT SCALE DRAWING	