



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

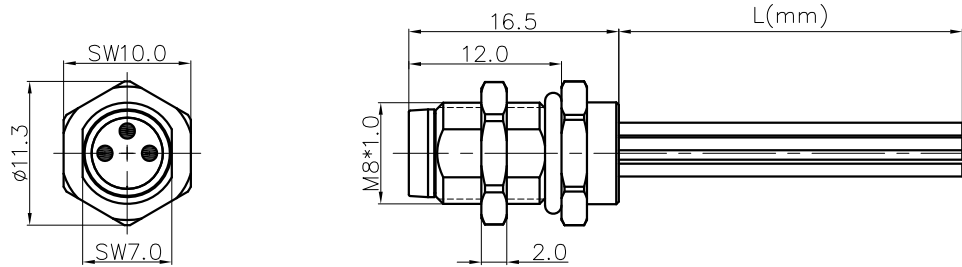

Panel cut

SD-M8X-XXP-MM-SF7CXX-00A(H)  
 Coding: A,B  
 Pin number: 03,04, 05,06,08  
 XX: 150~1500mm  
 15: 150±15mm  
 30: 300±20mm  
 50: 500±20mm  
 A0: 1000±40mm  
 A5: 1500±40mm  
 Wire Length(L): 150~1500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A  
 4pin: 60V / 3A  
 5pin: 30V / 3A  
 6pin: 30V / 1.5A  
 8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min  
 5,6,8pin: AC650V/1Min
- Levels of protection: IP67
- Wire specifications :  
 3pin: 24AWG/0.25mm<sup>2</sup>, UL1061  
 4pin: 24AWG/0.25mm<sup>2</sup>, UL1061  
 5pin: 24AWG/0.25mm<sup>2</sup>, UL1061  
 6pin: 26AWG/0.14mm<sup>2</sup>, UL1061  
 8pin: 26AWG/0.14mm<sup>2</sup>, UL1061
- Wire connection mode: soldering
- Operating temperature: -25°C~+80°C
- For Panel Thickness Range: 2.0~4.5mm
- RoHS Compliance
- Tolerance :  
 .X ±0.25mm  
 .XX ±0.1mm  
 Angles ±1°

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
				8 Red
				7 Blue
		5 Gray	6 Pink	6 Pink
		4 Black	5 Gray	5 Gray
4 Black	4 Black	4 Black	4 Black	4 Yellow
3 Blue	3 Blue	3 Blue	3 Blue	3 Green
	2 White	2 White	2 White	2 Brown
1 Brown	1 Brown	1 Brown	1 Brown	1 White
Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color
Pin Out	Pin Out	Pin Out	Pin Out	Pin Out

DETACHED LISTS	PART NO.: SDM8XXPMMSF7CXX00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SD-M8X-XXP-MM-SF7CXX-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV	DO-1	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXX-XX-CXX	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1