


SPECIFICATIONS

Current Rating: 1A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 500V AC/minute
 Temperature Range: -40°C ~ +105°C



MATERIAL

Contact: Copper Alloy
 Insulator: Nylon 9T, UL94V-0



ORDER INFORMATION

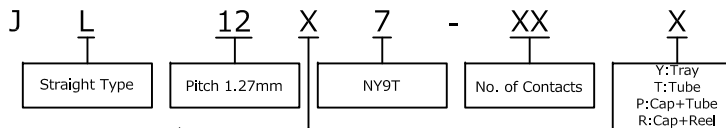

G0:Gold Flash	S0:Selective Flash
G1:Gold 3u"	S1:Selective 3u"
G2:Gold 5u"	S2:Selective 5u"
G3:Gold 10u"	S3:Selective 10u"
G4:Gold 15u"	S4:Selective 15u"
G5:Gold 30u"	S5:Selective 30u"

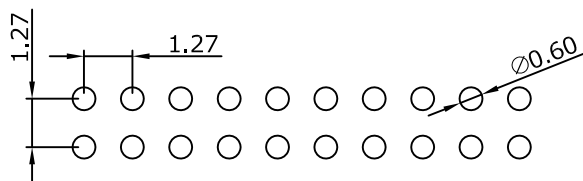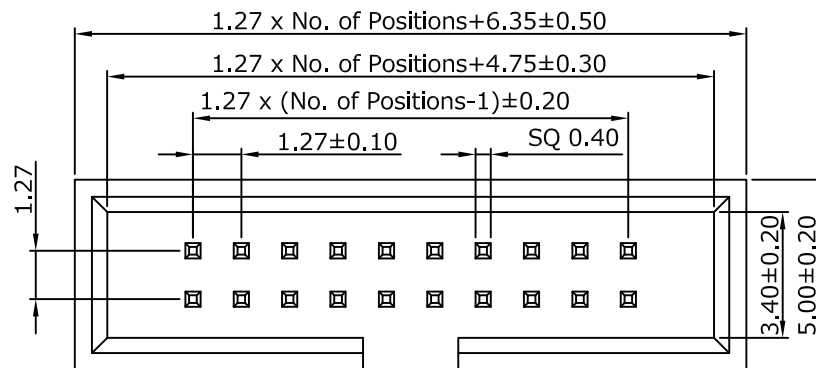

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

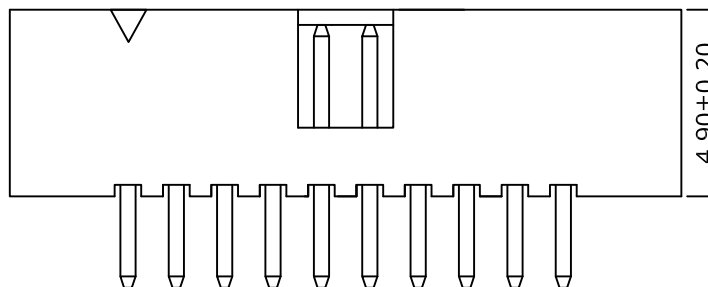

PART NO.	JL12X7-XXX	DRAWN	Andrew
DRAWING NO.	JL12X7-XXX	CHECKED	Claudia
DATE	2007/10/21	APPROVED	Brian

TITLE:	Box Header 1.27mm	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.		DESCRIPTION	DATE
--------	-------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	--	-------------	------