


# Quectel FC41D

## Wi-Fi 4 & Bluetooth 5.2 Module Compact LCC Package

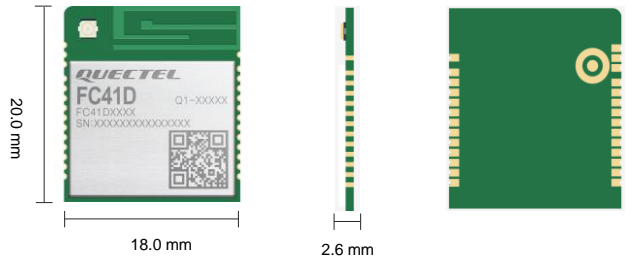

FC41D is a cutting-edge MCU Wi-Fi and Bluetooth module launched by Quectel. It boasts a high-performance processor with a frequency of up to 120 MHz and supports IEEE 802.11b/g/n protocol and Bluetooth 5.2. The module features built-in 256 KB RAM and 2/4 MB flash, ensuring efficient performance. In addition, it complies with WPA-PSK, WPA2-PSK and WPA3-PSK security standards.

FC41D is in an LCC form factor with an ultra-compact package size of 20.0 mm × 18.0 mm × 2.6 mm, which optimizes the size and cost for end-products and is compatible with diverse designs.

FC41D supports multiple interfaces including UART, SPI, I2C, ADC and PWM, and many low power consumption modes and keep-alive mechanism, which provide flexibility and versatility for a range of applications, especially in smart homes and industrial IoT scenarios.

FC41D supports the QuecOpen® solution and standard AT commands, has a compact protocol stack. FC41D supports a variety of public cloud services, and can realize efficient product development for customers.



### Key Features

- ✓ Wi-Fi 4 module, single band (2.4 GHz) Wi-Fi, 1 × 1 antenna
- ✓ Bluetooth 5.2 and Bluetooth pairing
- ✓ Large memory, 256 KB RAM and 2/4 MB flash
- ✓ Supports up to 19 GPIOs for UART, SPI, I2C, ADC and PWM functions in QuecOpen® solution
- ✓ 4th generation RF coaxial connector, external antenna pin, PCB antenna (optional)
- ✓ High stability, high reliability and full compatibility



IEEE 802.11b/g/n



Bluetooth 5.2



Large Memory



Compact Size



LCC Form Factor



Multiple Interfaces



Operating Temperature Range: -40 °C to +85 °C

# Quectel FC41D

Wi-Fi 4 & Bluetooth 5.2		FC41D	
WLAN Protocol	IEEE 802.11b/g/n		
Wi-Fi Frequency Band	2.4 GHz		
Wi-Fi Modulation Mode	BPSK/QPSK/CCK/16QAM/64QAM		
Wi-Fi Operating Mode	AP/STA		
Bluetooth Protocol	Bluetooth 5.2		
Encryption Mode	WPA-PSK/WPA2-PSK/WPA3-PSK		
Internet Protocol	IPv4		
Kernel	ARM968 (up to 120 MHz)		
RAM	256 KB		
Flash	2/4 MB <sup>①</sup>		
Dimension	20.0 mm × 18.0 mm × 2.6 mm		
Weight	1.51 g		
<b>Temperature Range</b>			
Operating Temperature Range	-40 °C to +85 °C		
Storage Temperature Range	-45 °C to +95 °C		
<b>Certification</b>			
Regulatory	<b>Europe:</b> CE <b>America:</b> FCC <b>Canada:</b> IC <b>Brazil:</b> Anatel <b>China:</b> SRRC <b>Australia/New Zealand:</b> RCM <b>South Korea:</b> KC		
Others	Bluetooth		
<b>Interfaces</b>			
Antenna Interface	× 1 (4th generation RF coaxial connector, external antenna pin, PCB antenna) (optional)		
Other Interfaces <sup>②</sup>	UART/SPI/I2C/PWM/ADC		
<b>Electrical Features</b>			
Power Supply Voltage	3.0–3.6 V, Typ. 3.3 V		
<b>RF Performance</b>			
		<b>Receiving Sensitivity</b>	<b>Output Power</b>
2.4 GHz	802.11b/1 Mbps	-96 dBm ±2 dB	16 dBm ±2 dB
	802.11b/11 Mbps	-87 dBm ±2 dB	16 dBm ±2 dB
	802.11g/6 Mbps	-91 dBm ±2 dB	15 dBm ±2 dB
	802.11g/54 Mbps	-74 dBm ±2 dB	14 dBm ±2 dB
	802.11n/HT20 MCS 0	-90 dBm ±2 dB	14 dBm ±2 dB
	802.11n/HT20 MCS 7	-71 dBm ±2 dB	13 dBm ±2 dB
BLE	1 Mbps	-95 dBm ±2 dB	6 dBm ±2 dB

Ordering Code	Flash	Operating Temperature Range	Antenna	Development Board (Only for Debugging)
FC41DAEMD	2 MB	-40 °C to +85 °C	External antenna pin	FC41DAATB-KIT
FC41DAFMD	2 MB	-40 °C to +85 °C	4th generation RF coaxial connector	-
FC41DAGMD	2 MB	-40 °C to +85 °C	PCB antenna	FC41DAGTB
FC41DAHMD	4 MB	-40 °C to +85 °C	PCB antenna	FC41DAHTB

#### NOTE:

- ①: Contact Quectel sales if you need a flash of other specifications.
- ②: See hardware design documents for details of the module interfaces.
- \*: Under development or planning.