


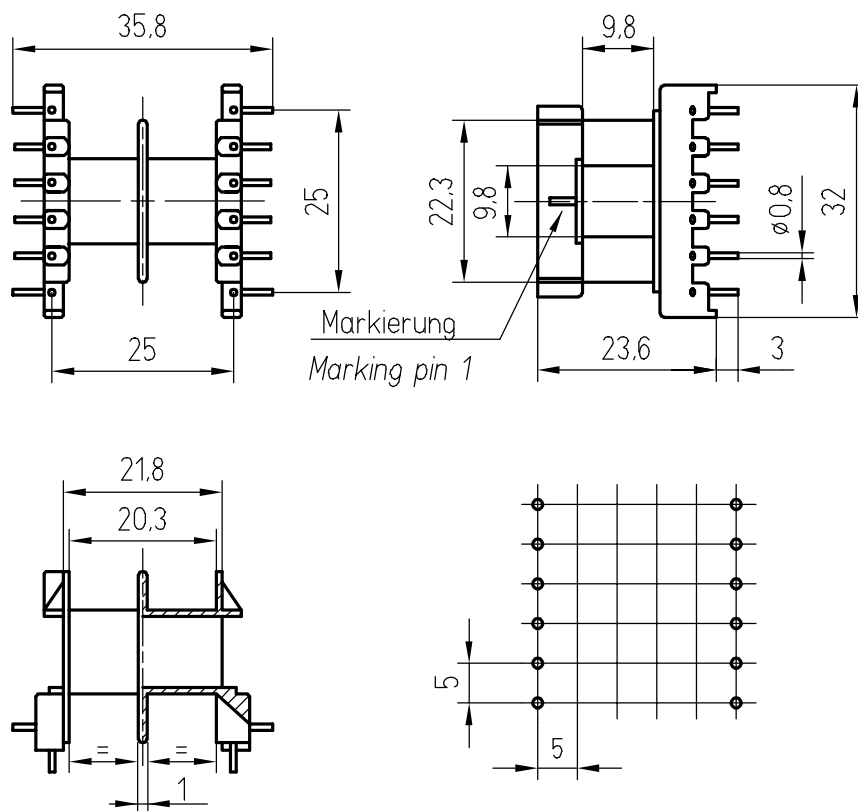

[mm]

A_N in mm ²	103,3
l_N in mm mittlere Weglänge average path length	65,5
max. Stifanzahl max. no. of pins	12
Standardmaterial Kunststoff standard plastic material	Polyamid (z.B. Ultramid)
Standardmaterial Anschlussstifte standard material pins	Nickel Silver CuNi18Zn20 (coating: 1µm Ni, 5-7 µm Sn 100)
Bestell.-Nr. Ordering no.	501 320 920 12U
Bemerkung remark	- -

Bestiftungsvarianten möglich / Pin connections variable

Schutzrecht nach DIN 34 beachten Copyright according to DIN 34				Freimaßtoleranzen		Oberfläche	Maßstab		Position		Menge		
				☐ DIN 7168 m ☒ DIN 16901									
					Datum	Name	SP - E 32/9 - 1481 - 12B L-B						
				Bearb.	05.11.2001	Eberwien							
				Gepr.									
				Norm									
				KASCHKE KG GmbH & Co. 37079 Göttingen			SP 1481 K					Blatt	
Zust.		Änderungen		Datum	Name	Dateiname Sp1481K							