
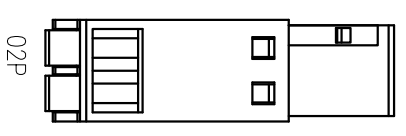

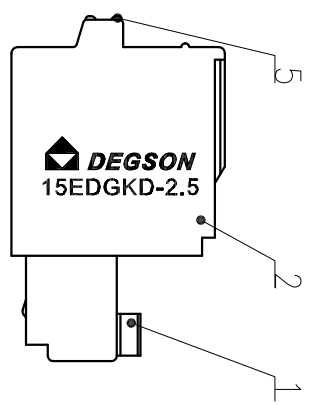
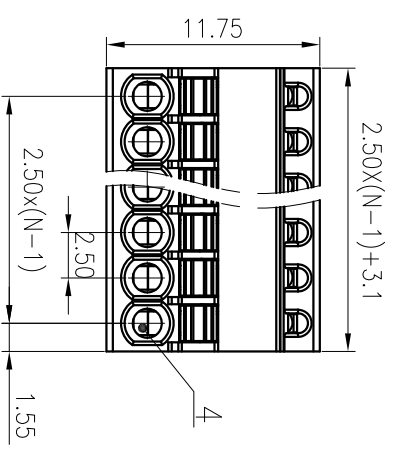
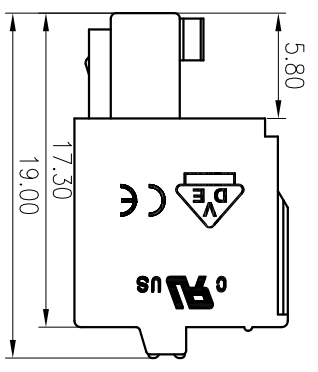


基本公差/General tolerances(mm)		公差带/Tolerance zone	
0	>3	>10	>30
~	>6	~	~
3	6	18	30
~	10	~	~
~	18	~	~
~	30	~	~
~	50	~	~
~	80	~	~
~	120	~	~
~	180	~	~
~	250	~	~
~	315	~	~
~	400	~	~
~	500	~	~
~	>500	~	~
~	0.1/10	~	~
~	±2'	~	~

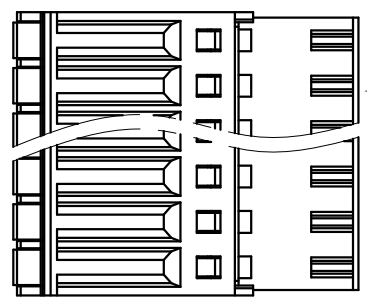

5	Button	POM	UL94HB
4	Spring	Stainless steel	
3	Clamp	Copper alloy	Sn Plated
2	Housing	PA66	UL94V-0
1	Cover	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 150/4 150/4 150/4			
IEC 标准/IEC Standard: B C D			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
级/Pollution Degree III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) / / /			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) / / /			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG) 0.2~0.5/26~20			
间距/Pitch(mm)/线数范围/Poles 2.5/N=02~12P			
剥线长度/Stripping length(mm) 8.0			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL:

MAT NO.:

STATUS:

APPD: LIQL 2020.06.17

CHKD: MG EK 2020.06.17

DRFT: WJW 2017.06.29

SURFACE:

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: 15EDGKD-2.5-XXP-1Y-00A(H)

DRAWING NO.: 15EDGKD-2.5-C01

TYPE: CUSTOMER DRAWING SCALE: 2.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
1				
2				
3				
4				
5				
6				