
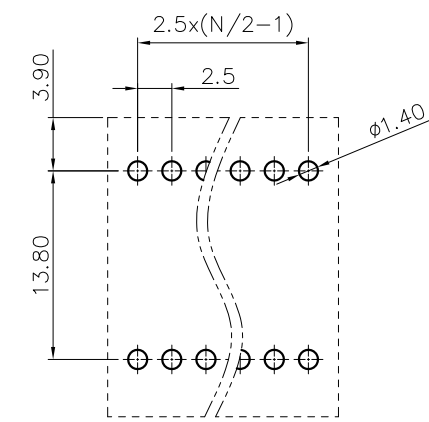
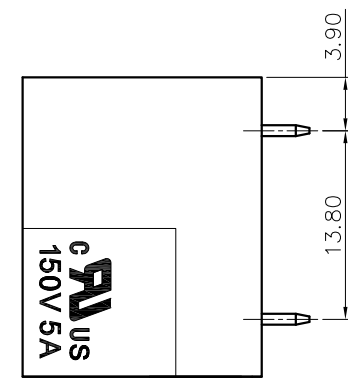

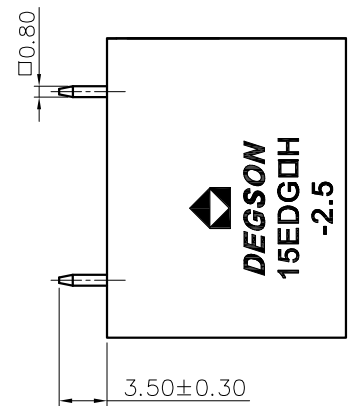
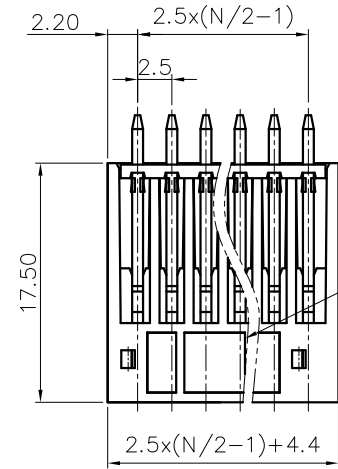


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

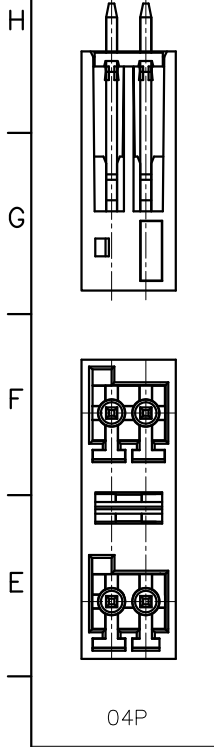

NOTES1:

- UL Standard
- 1. Rated voltage/current : 150V / 5A
- 2. Withstanding voltage : AC1300V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	100V
Rate current(A)	4A

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 2.5mm, Poles : N=04~24P
- 3. Operating temperature: -40°C~+105°C
- 4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm				-	∩	□	
	Over 6 TO 6	Over 10 TO 24	Over 30 TO 60	Over 60 TO 150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

5. RoHS Compliance

15EDGVH - 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

(Single Pitch) (RoHS) 00A--(Standard)

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/	NAME: 15EDGVH-2.5-XXP-1Y-00A(H)			
	CHKD:	/	TITLE: CUSTOMER DRAWING			
	DRFT:	/	DRAWING NO.:		REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.: / MM (INCH)		SHEET	1/1
			DO NOT SCALE DRAWING	SCALE	1:1	