

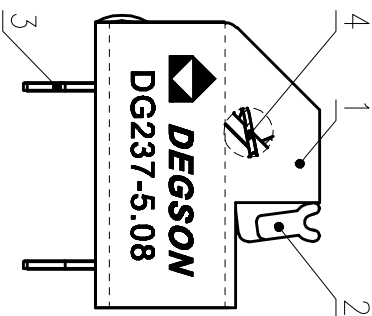
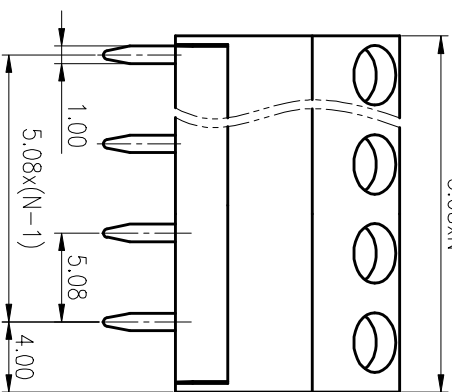
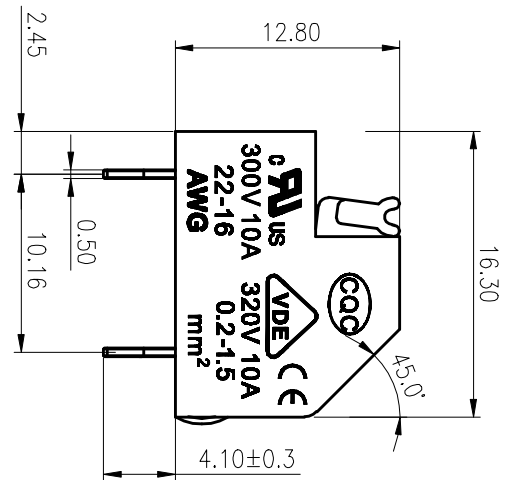


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

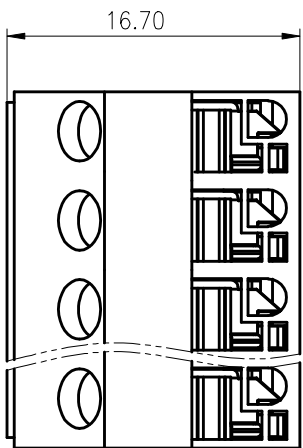

PCB LAYOUT

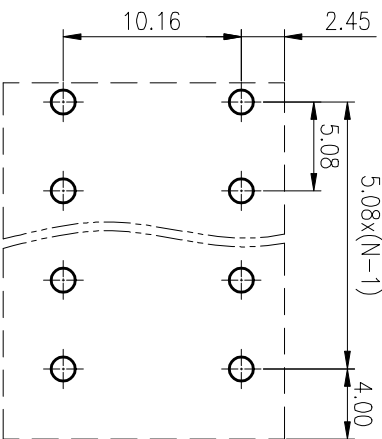

ITEM	NAME OF PART	MATERIAL	NOTES
4	Spring	Stainless steel	/
3	Pin header	Copper alloy	Sn Plated
2	Button	PA66	UL94V-0
1	Housing	PA66	UL94V-0

REV	EN	DESCRIPTION	DRAFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG237-5.08-XXP-1Y-00A(H)	
APPD: LiGL	2020.05.30	DRAWING NO.: DG237-5.08-C01	
CHKD: Mek	2020.05.30	TYPE: CUSTOMER DRAWING	
DRAFT: MSh	2020.05.30	SCALE: 2.5:1	SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污秽等级/Pollution Degree	/	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	320/10	/
工频耐压/Withstanding Voltage(V/1Min)	/	AC2500	/
线径范围(裸线/带绝缘)/Wire Range(rigid and flexible)(mm² /AWG)	/	0.2~1.5/22~16	/
间距/Pitch(mm)/线数范围/Poles	/	5.08/N=02~12P	/
剥线长度/Stripping length(mm)	/	9	/
使用温度范围/Operating Temperature(°C)	/	-40~+105	/
符合RoHS要求/Conform to RoHS	/	Yes	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/