



Designers' Choice


INSULATED PC SPACERS/SUPPORTS

- Easy snap-in assembly
- Designed for .062 thick PC boards and chassis
- Releasable for repairs

- Strong dependable grip
 - No tools required for installation
- MATERIAL:** Nylon, UL Rated 94V-0

PC TENSION-FIT SUPPORTS

One end locks into chassis, the other end tension-fits into the PC board



FOR .156 DIA. MOUNTING HOLE	.400	.275
FOR .062 THICK PCB	.546	
CHASSIS .070 MAX.	A	
FOR .187 DIA. MOUNTING HOLE	.203	
		CAT. NO. "A" DIM.
1927A	.250	
1928A	.375	
1929A	.500	
1930A	.625	
1931A	.750	
1932A	.875	
1933A	1.000	

One end locks into chassis, the other end tension-fits into the PC board



FOR .156 DIA. MOUNTING HOLE	.400	.280
FOR .062 THICK PCB	.562	
FOR .062 CHASSIS	A	
FOR .187 DIA. MOUNTING HOLE	.100	
		CAT. NO. "A" DIM.
8800	.187	
8801	.250	
8802	.375	
8803	.500	
8804	.625	
8805	.750	
8806	.875	

PC SPACER SUPPORTS


One end locks into chassis, other end supports the PC board



FOR .062 CHASSIS	.562	.280
FOR .187 DIA. MOUNTING HOLE	.218	
		CAT. NO. "A" DIM.
8822	.187	
8823	.250	
8824	.375	
8825	.500	
8826	.625	
8827	.750	
8828	.875	

STACKING SPACERS

Self-aligning and self retaining. Designed for stacking multiple levels of PC boards. Available for use with #4, #6 & #8 size screws.

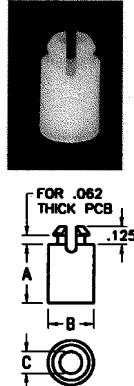

CAT. NO.	"A" DIM.	"B" DIM.	"C" DIM.	MTG HOLE	SCREW SIZE
8829	.125	.260	.125	.187	#4
8830	.187	.260	.125	.187	
8831	.250	.260	.125	.187	
8832	.375	.260	.125	.187	
8833	.500	.260	.125	.187	
8834	.625	.260	.125	.187	
8835	.250	.312	.153	.234	#6
8836	.375	.312	.153	.234	
8837	.500	.312	.153	.234	
8838	.625	.312	.153	.234	
8839	.250	.312	.169	.234	#8
8840	.375	.312	.169	.234	
8841	.500	.312	.169	.234	
8842	.625	.312	.169	.234	

PC LOCK-IN SUPPORTS

One end locks into chassis, the other end locks into the PC board




FOR .156 DIA. MOUNTING HOLE	.350	.275
FOR .062 THICK PCB	.546	
CHASSIS .070 MAX.	A	
FOR .187 DIA. MOUNTING HOLE	.203	
		CAT. NO. "A" DIM.
1927B	.250	
1928B	.375	
1929B	.500	
1930B	.625	
1931B	.750	
1932B	.875	
1933B	1.000	

One end locks into chassis, the other end locks into the PC board



FOR .156 DIA. MOUNTING HOLE	.218	.280
FOR .062 THICK PCB	.218	
FOR .062 CHASSIS	.562	
FOR .156 DIA. MOUNTING HOLE	.218	
		CAT. NO. "A" DIM.
8815	.187	
8816	.250	
8817	.375	
8818	.500	
8819	.625	
8820	.750	
8821	.875	

One end locks into chassis, the other end locks into the PC board with easy release lever



FOR .156 DIA. MOUNTING HOLE	.400	.280
FOR .062 THICK PCB	.562	
FOR .062 CHASSIS	A	
FOR .156 DIA. MOUNTING HOLE	.218	
		CAT. NO. "A" DIM.
8807	.187	
8808	.250	
8809	.375	
8810	.500	
8811	.625	
8812	.750	
8813	.875	
8814	1.000	

METRIC PC LOCK-IN SUPPORTS

One end locks into chassis, the other end locks into the PC board



FOR 4.00 DIA. MOUNTING HOLE	4.83	6.00
FOR 1.57 THICK PCB		
FOR .157 CHASSIS		
FOR 4.00 DIA. MOUNTING HOLE	3.18	
		CAT. NO. "A" DIM.
8843	3mm	
8844	4mm	
8845	6mm	
8846	8mm	
8847	10mm	
8848	12mm	
8849	14mm	
8850	16mm	
8851	18mm	

MATERIAL: Nylon, UL Rated 94V-2