


Z4S-150

**Ø 4 mm-Sicherheits-Messleitungsset „Elektriker 1“
(8-teilig schwarz/rot)**

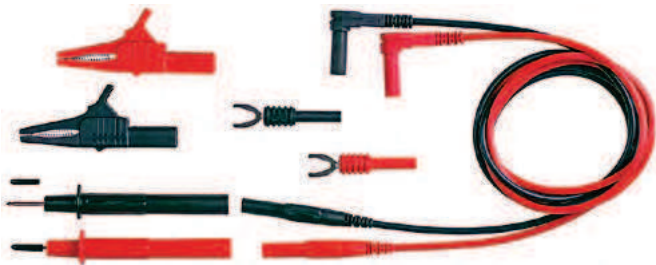

Z4S-150

**Ø 4 mm Safety Test Lead Set “Electrical 1”
(8-piece black/red)**



S1

Typ	Bestell-Nr.		Type	Order No	
Z4S-150	99.00403		Z4S-150	99.01403	

Set-Inhalt und technische Daten

2 × XMS-484 	Ø 4 mm-Sicherheits-Messleitungen, Siliconisoliert, 100 cm lang, 1,0 mm ² .
2 × PP-115/2 	Aufsteckbare Sicherheits-Prüfspitzen, Ø 2 mm, Edelstahl, starr. Lieferung mit Schutzkappe.
2 × XKK-1001 	Aufsteckbare Sicherheits-Krokodilklemmen mit allseitiger Isolierung. Mit kräftigem Maul und Feindrahtfläche.
2 × XKS-A	Sicherheits-Kabelschuh-Adapter.

Set Contents and Technical Data

Ø 4 mm safety test leads, Silicone insulated, 100 cm long, 1,0 mm ² .	1000 V, CAT III 19 A
Push-on safety test probes, Ø 2 mm, stainless steel, rigid. Supplied with protective cap.	1000 V, CAT II 10 A
Push-on safety crocodile clips with all-round insulation and strong jaws with surface for fine wire.	1000 V, CAT II max. 32 A
Safety cable lug adapter.	1000 V, CAT II 20 A

Z4S-200

**Ø 4 mm-Sicherheits-Messleitungsset „Elektriker 2“
(8-teilig schwarz/rot)**



Z4S-200

**Ø 4 mm Safety Test Lead Set “Electrical 2”
(8-piece black/red)**



S1

Typ	Bestell-Nr.		Type	Order No	
Z4S-200	99.00404		Z4S-200	99.01404	

Set-Inhalt und technische Daten

2 × XMS-484 	Ø 4 mm-Sicherheits-Messleitungen, Siliconisoliert, 100 cm lang, 1,0 mm ² .
2 × PP-115/4 	Aufsteckbare Sicherheits-Prüfspitzen. Ø 4 mm-Spitze mit federnder Kontaktlamelle. Lieferung mit Schutzkappen.
2 × XKK-1001 	Aufsteckbare Sicherheits-Krokodilklemmen mit allseitiger Isolierung. Mit kräftigem Maul und Feindrahtfläche.
2 × XKS-A	Sicherheits-Kabelschuh-Adapter.

Set Contents and Technical Data

Ø 4 mm safety test leads, Silicone insulated, 100 cm long, 1,0 mm ² .	1000 V, CAT III 19 A
Push-on safety test probes. Ø 4 mm tip with spring Multilam. Supplied with protective caps.	1000 V, CAT II 32 A
Push-on safety crocodile clips with all-round insulation and strong jaws with surface for fine wire.	1000 V, CAT II max. 32 A
Safety cable lug adapter.	1000 V, CAT II 20 A