

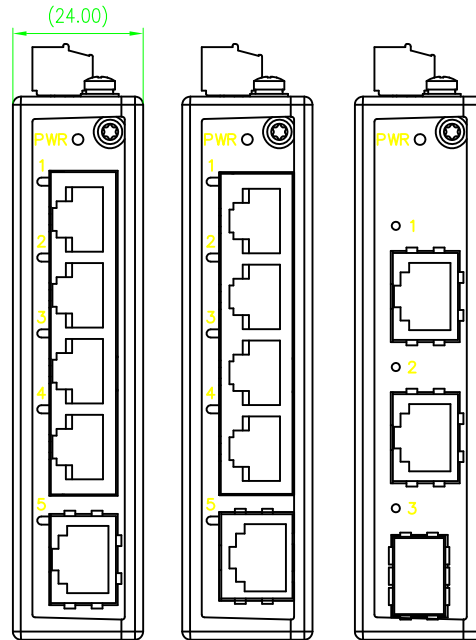
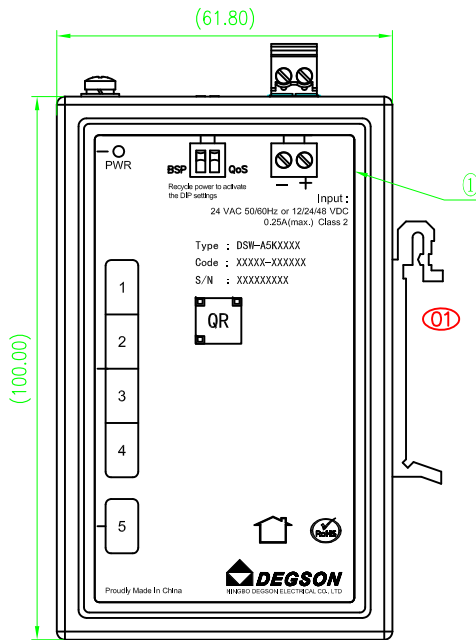
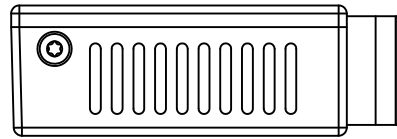


尺寸公差(mm)					0.05/10 ±T
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

端口数	5口
防护等级	IP30
工作温度	-40~+75℃
电源	支持24 VAC 50/60Hz or 12/24/48 VDC 0.25A(max.) Class 2
安装方式	DIN35mm
印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect	

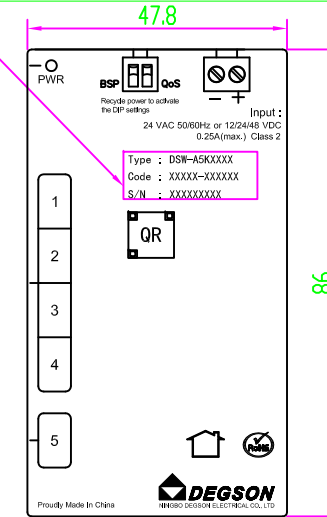


产品序列号  
随产品出厂自动生成;

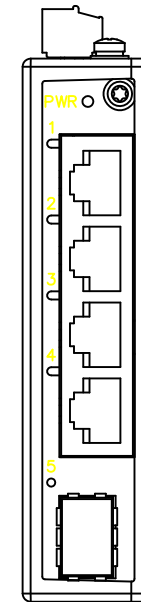

哑银标签  
scale: 1:1

DSW-A5K0005 DSW-A5K0050 DSW-A3K1020

DSW-A5K0104

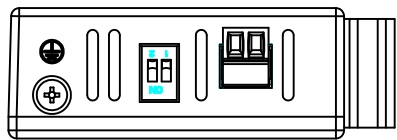

MATERIAL:	/	SURFACE:	/
MAT.NO.:		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:		Description:	
CHKD:		DSW-A5KXXXX	
DRFT:	luo DP 2021.09.27	DRAWING NO.:	200015111
REV	ECN	DESCRIPTION	SCALE: 1:1
DRFT	DATE	TYPE: PRODUCT DRAWING	SHEET 1/1

O1		依据产品样品, 更新产品标签	Luo DP	2021.11.22
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件内容。未经明确授权, 严禁复制或传播。本公司保留对专利及权利的保留权利。