

RT1 SERIES

ORDER CODE
RT1-12-20-A

□: 1c
 A: 1a

20: 20A
 30: 30A

COIL VOLTAGE

TYPE — RT: Open-Frame
 RT1: Sealed

05: DC 5V
 06: DC 6V
 09: DC 9V
 12: DC 12V
 15: DC 15V
 18: DC 18V
 24: DC 24V
 48: DC 48V



Main Features:

- UL and CUR safety approval.
- Open type, flux free, and sealed type available.
- Up to 30amps switching in SPNO and 20amps switching in SPDT arrangement.
- Suitable for various industrial.

COIL RATING (at 20°C)

NOMINAL VOLTAGE (VDC)	COIL RESISTANCE (Ω)(±10%)	POWER CONSUMPT -ION(W)	NOMINAL CURRENT (mA)(±10%)	PULL IN VOLTAGE (VDC)	DROP OUT VOLTAGE (VDC)	MAX. ALLOWABLE VOLTAGE (VDC)
5V	27Ω	0.93W	185.0mA	80% MAX.	5% MIN.	150%
6V	40Ω		150.0mA			
9V	97Ω		93.0mA			
12V	155Ω		77.0mA			
15V	255Ω		59.0mA			
18V	380Ω		47.0mA			
24V	660Ω		36.0mA			
48V	2560Ω		18.8mA			



PERFORMANCE (at initial value)

Item	Type	1c	1a
Contact Resistance		100mΩ Max.(initial value)	
Operate Time		15msec Max.	
Release Time		10msec Max.	
Dielectric Strength between coil & contact		AC1500V (1min)	
Dielectric Strength between contact		AC1500V (1min)	
Insulation Resistance		100MΩ Min.(DC500V)	
Operating Ambient Temperature		-35°C ~ +85°C	
Humidity		35 to 85% RH	
Vibration Resistance		10G (10~55Hz)(Dual amplitude:1.5mm)	
Shock Resistance		10G	
Life Expectancy Mechanically		10,000,000 ops. Min.(1800 ops./h)	
Life Expectancy Electrically		100,000 ops. Min.(1200 ops./h)	
Weight		RT: 23g RT1: 28g(about)	

CONTACT RATING

Item \ Type	1c	1a
Rated Carrying Current	NO: AC250V 30A AC125V 30A DC30V 30A	NC: AC250V 20A AC125V 20A DC30V 20A
Motor load	AC250V 2HP AC125V 1HP	
Max. Allowable Current	30A	30A
Max. Allowable Voltage	AC 250V	
Max. Current (continual)	30A	30A
Min. Load	DC10V 10mA	
Contact Material	Ag Alloy	

DIMENSIONS(Unit: mm)

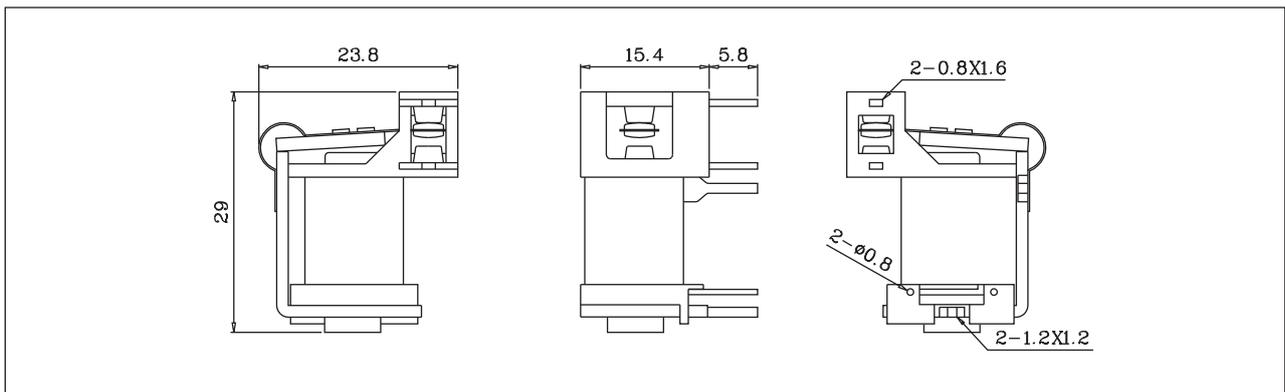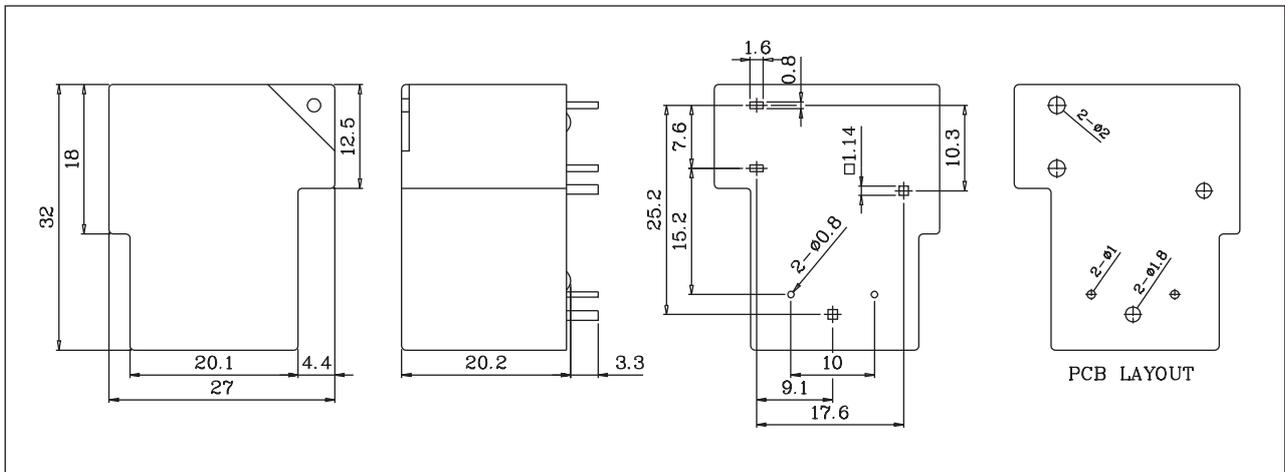

WIRING DIAGRAMS(Bottom View)

