
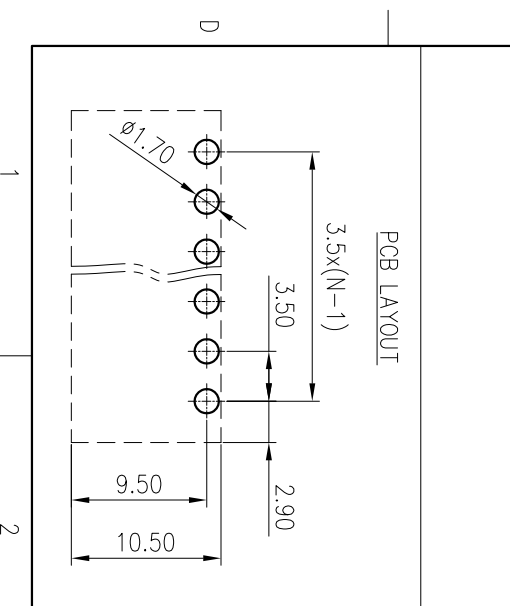

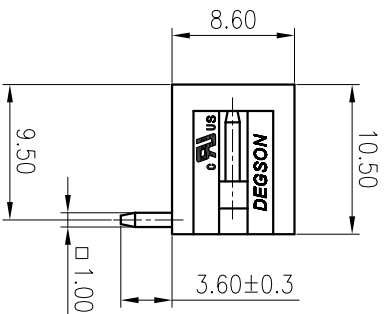


0	~	>3	~	>6	~	>10	~	>18	~	>30	~	>50	~	>80	~	>120	~	>180	~	>250	~	>315	~	>400	0.1/1.0	
~	3	~	6	~	10	~	18	~	30	~	50	~	80	~	120	~	180	~	250	~	315	~	400	~	500	~
公差/General Tolerances(mm)																										
$\pm 0.12$ $\pm 0.18$ $\pm 0.22$ $\pm 0.26$ $\pm 0.31$ $\pm 0.37$ $\pm 0.57$ $\pm 0.80$ $\pm 0.93$ $\pm 1.08$ $\pm 1.15$ $\pm 1.60$ $\pm 2.20$ $\pm 2.50$																										
$\pm 2^\circ$																										

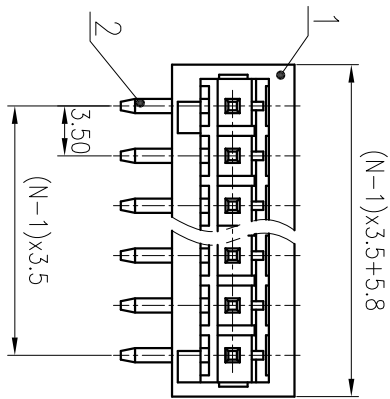

REV	EON	DESCRIPTION	DRFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: 8EDGRC-3.5-XXP-11-01A(H)	
APPD:	/	DRAWING NO.:	10001577
CHKD:	/	TYPE:	CUSTOMER DRAWING
DRFT:	ZhuYYP2020.03.17	SCALE:	2:1
		REV	T0
		SHEET	1/1

1	Housing	PAG6	UL94V-0	
2	Pin	Copper alloy	Sn Plated	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准 / UL Standard:	B	C	D	
额定电压 / 电流 / Rated Voltage(V) / Current(A)	300/10	/	300/10	
EC 标准 / EC Standard:				
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree			III/3	
额定电压 / 电流 / Rated Voltage(V) / Current(A)			130/10	
额定脉冲电压 (KV) / Rate Impulse Voltage(KV)			2.5	
螺丝扭矩 / Torque Tightening(N.m/Lb.in)			/	
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)			/	
间距 / Pitch(mm) / 线数范围 / Poles			3.5 / 02~24P	
剥线长度 / Stripping length(mm)			/	
使用温度范围 / Operating temperature(°C)			-40~+105	
符合RoHS环保要求 / Conform to RoHS			Yes	
标准颜色编号 / Standard color number:			PANTONE 7534U	