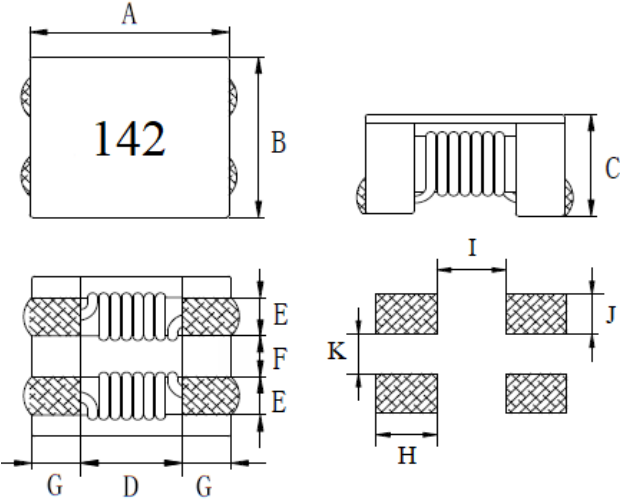
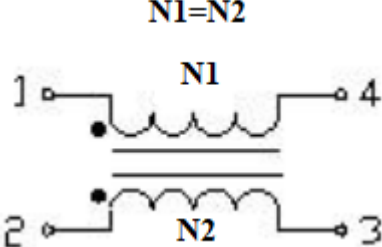


# SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: SCM474520-142		DWG.NO: SL2270255
CUSTOMER PART NO:		CUST.DWG.NO:
<p>(1) DIMENSION(UNIT: mm)</p> 		A     4.70 ± 0.5     m/m
		B     4.50 ± 0.5     m/m
		C     2.20 (MAX)     m/m
		D     2.70 (REF)     m/m
		E     0.75 (REF)     m/m
		F     1.26 (REF)     m/m
		G     1.00 (REF)     m/m
		H     1.75 (REF)     m/m
		I     2.00 (REF)     m/m
		J     1.75 (REF)     m/m
K     0.90 (REF)     m/m		
(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC
Z (Ω)	1200 (MIN)	<p style="text-align: center;"><b>N1=N2</b></p> 
RDC (mΩ)	81 (MAX)	
IDC (A)	1.9 (MAX)	
TEST CONDITION	100MHz	
(4)MATERIAL LIST		
NO/ITEM		
		APPROVED BY 吳載敏
		CHECKED BY 張明德
		DRAWN BY Vicky

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER:				DATE:				
PART NO: SCM474520-142				DWG.NO: SL2270255				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 100MHz				DIMENSION (UNIT : mm)				
ITEM	Z (Ω)	RDC (mΩ)	IDC (A)	A	B	C		
SPEC	1200 (MIN)	81 (MAX)	1.9 (MAX)	4.7 ± 0.5	4.5 ± 0.5	2.2 (MAX)		
1	1279	65.4	OK	4.69	4.49	1.91		
2	1409	67.5	OK	4.71	4.52	1.92		
3	1354	67.2	OK	4.70	4.45	1.95		
4	1404	67.6	OK	4.67	4.49	1.97		
5	1263	66.7	OK	4.72	4.50	1.91		
6	1395	69.3	OK	4.73	4.50	1.94		
7	1362	64.7	OK	4.63	4.51	1.93		
8	1392	69.8	OK	4.72	4.49	1.91		
9	1400	68.3	OK	4.70	4.45	1.91		
10	1398	67.6	OK	4.66	4.48	1.93		
X	1366	67.4		4.69	4.49	1.93		
R	146	5.1		0.10	0.07	0.06		
TEST INSTRUMENTS GKT-3250 GKT-502BC CH2816 WR7210						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY Vicky		

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw