
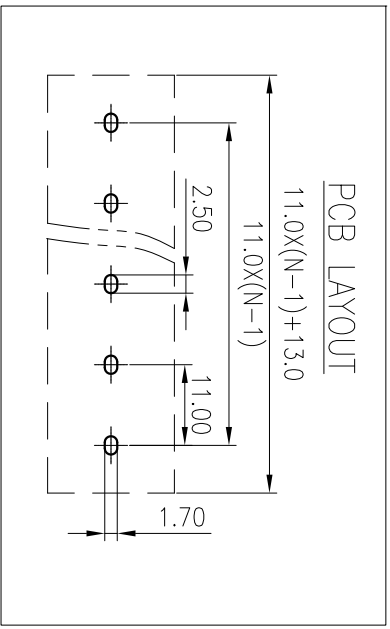



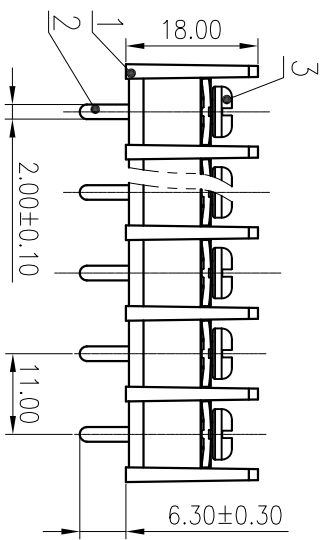


Pitch	Range In mm			Nominal Dimension Range In mm			Over	0.1/10
	Over	TO	TO	Over	TO	TO		
6	6	10	10	6	10	10	150	≤
10	10	24	30	60	100	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

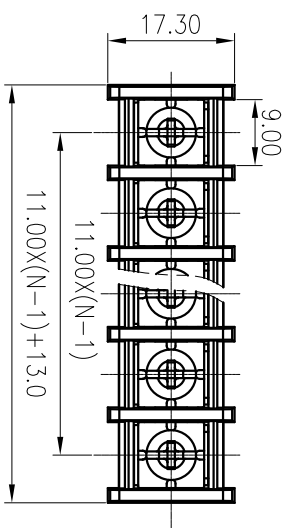

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/30	7	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	300/20	600/20
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	4	4	4
额定转矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53		
线径范围(线径)/Wire Range(flexible)(AWG)	22~10		
间距/Pitch(mm)/线数范围(Poles)	11.00/N=02~22P		
剥线长度/Stripping length(mm)	12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /

SURFACE: /

MAT NO.: /

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

STATUS: /

DRAWING NO.: DG65B-C03

APPD: /

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

CHKD: /

TYPE: CUSTOMER DRAWING

DRFT: WU NK 2020.05.28

SCALE: 1:1

REV	ECN	DESCRIPTION	DRFT	DATE

SIZE: A4	mm	inch	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET