

SPECIFICATIONS




Current Rating: 3A AC, DC Max.
 Voltage Rating: 250V AC, DC
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC for 1 minute
 Temperature Range: -25°C to +105°C
 Insulator: NY66, UL94V-0, White

ORDER INFORMATION

H 2007 - XX



No. of contact	Dimensions	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

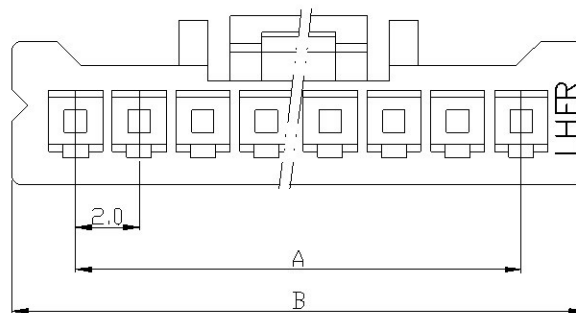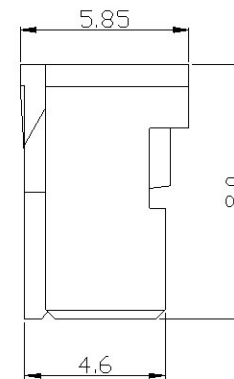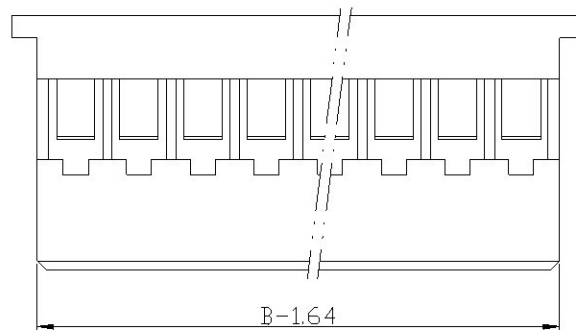

		PART NO.	H2007-XX		DRAWN	Andrew			
		DRAWING NO.	H2007-XX		CHECKED	Claudia			
		DATE	2021/11/11		APPROVED	Brian			
TITLE:	Pitch 2.0mm Housing	REV.	A0	TOLERANCE	.X ± 0.25 .XX ± 0.20	SCALE	1:1	UNIT	mm